

# SYSTXCCUIZ01 – B Infinity™ Zone Control



Turn to the Experts.™

## Product Data



A07258

**NOTE:** Infinity Zone Control compatible with Infinity rated indoor equipment only.

### INFINITY™ ZONE CONTROL

Carrier specializes in creating a customized home comfort system tailored to your needs with our broad selection of residential heating and cooling products. The Infinity Zone Control System is the ultimate control center for all of your system components. When you add an Infinity Zone Control to a compatible variable speed furnace, fan coil, or small packaged product, you will enjoy longer heating and cooling cycles at lower fan speeds for a more consistent temperature throughout your home. By adding an Infinity or Performance compatible outdoor unit, your benefits will increase even more. Benefits include better humidity and temperature control as well as a more energy efficient comfort system.

### INDUSTRY LEADING FEATURES/BENEFITS

Carrier's revolutionary Infinity Zone Control is the smart control of the future. The Infinity Zone Control features a large backlit liquid crystal display, making it easier to read the temperature, even at night. Intuitive prompts let you program everything from humidity levels to fan speeds, giving you ultimate control over your home comfort. The Infinity Zoning system does not require a bypass damper, leaving air temperature (LAT) sensor, or a field supplied power transformer.

- Up to 8 zones of control
- Patented automatic duct assessment design compensates for duct work variability
- No bypass damper required or recommended
- No LAT or HPT sensors required or recommended
- No field-installed transformer required
- Fan airflow adjustment by zone
- 4 wire installation from each component in the system
- Intuitive on screen prompts for ease of installation and service
- *Ideal Humidity™* settings are the default, no longer requiring increased system setup
- Complete integration of the temperature, humidity, and ventilation in every season
- TrueSense™ Dirty Filter Detection
- Indoor Air Quality pop-up reminders
- 7 day programmability with 2 or 4 periods per day
- Easy timed override schedule
- Simplified vacation schedules
- Day-at-a-glance programming for simplified ease of use
- Programmable fan by period
- General maintenance reminder messaging
- Optional Remote Access Kit can be added for access to your system from the internet or phone


## MODEL NUMBER NOMENCLATURE


| SYSTX           | CC      | UIZ                                                                                                                                                                                                         | 01                | -B               |
|-----------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------|
| Product Type    | Brand   | Model Type                                                                                                                                                                                                  | Packaged Quantity | Software Version |
| Infinity System | Carrier | UIZ - Zone User Interface<br>4ZC - Damper Control Module<br>NIM - Network Interface Module<br>SAM - System Access Module<br>RRS - Remote Room Sensor<br>LBP - Large Backplate<br>GRP - Green ABCD Connector |                   |                  |

SYSTXCCUIZ01-B




As an Energy Star® Partner, Carrier Corporation has determined that this product meets the ENERGY STAR® guidelines for energy efficiency

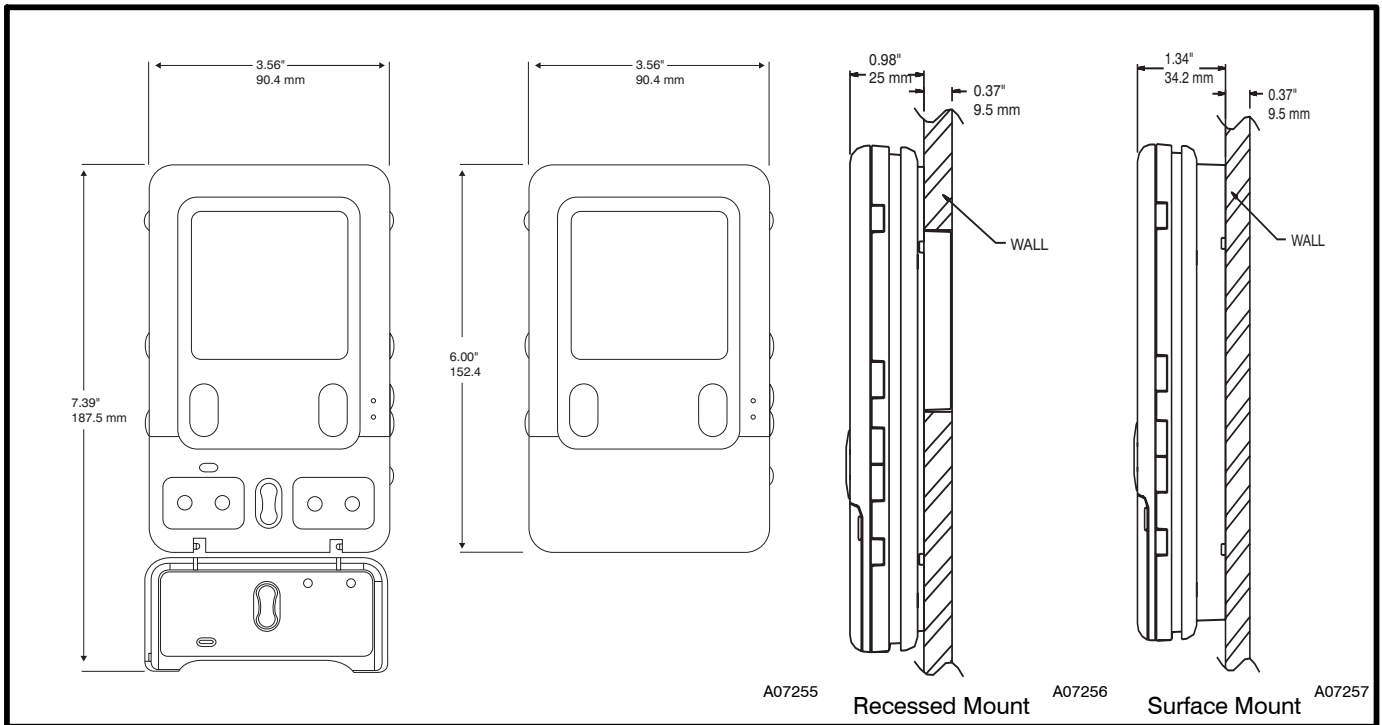

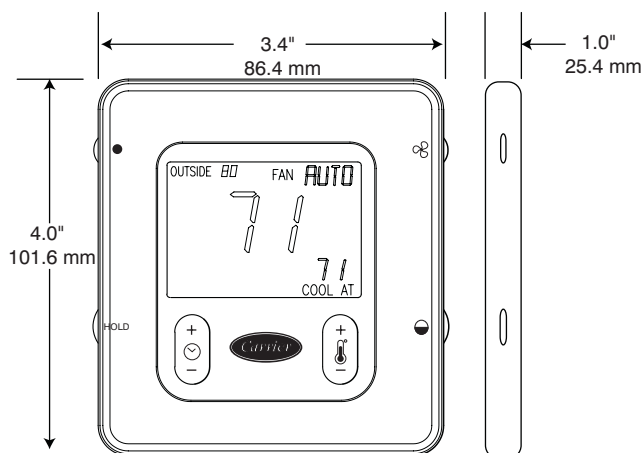

A07266

Fig. 2 – Smart Sensor Dimensions

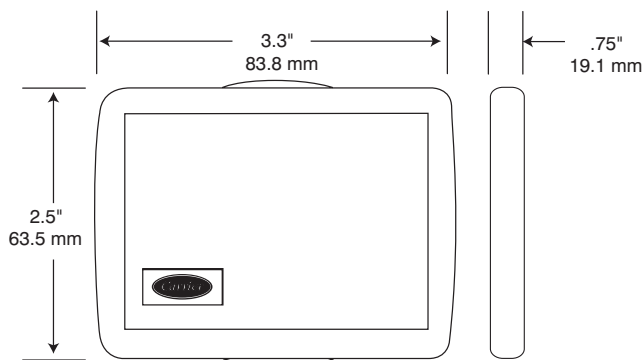

A07267

Fig. 3 – Remote Room Sensor Dimensions

## ZONING EQUIPMENT

| Description                             | Part No.         |
|-----------------------------------------|------------------|
| Infinity Zone Control                   | SYSTXCCUIZ01 – B |
| Infinity Network Interface Module (NIM) | SYSTXCCNIM01*    |
| Infinity Damper Control Module (4 Zone) | SYSTXCCZC01†     |

**NOTE:** Each piece of zoning equipment is sold separately allowing for customization of the zoning application.

\* Ventilator requires a Network Interface Module or Damper Control Module for operation.

Required to control a non-communicating heat pump in Hybrid Heat™ applications.

Required to control a non-communicating 2-stage AC or HP (38TDA, 38YDA)

† One damper control module handles up to 4 zones. A second damper control module is needed for zones 5–8.

## OPTIONAL ACCESSORIES

| Description                                                        | Part No.      |
|--------------------------------------------------------------------|---------------|
| Infinity System Smart Sensor                                       | SYSTXCCSMS01* |
| Infinity Remote Room Sensor (RRS)                                  | SYSTXCCRRS01  |
| Infinity Large Decorative Backplate                                | SYSTXX0LBP01  |
| Green Indoor Unit Plug (ABCD Connector) – 10 Pack Replacement      | SYSTXGRPLG10  |
| Infinity System Access Module (SAM)                                | SYSTXCCSAM01  |
| Infinity System Access Module (Remote Access Kit, Skytel – based)  | SYSTXCCSAM01  |
| Infinity System Access Module (Remote Access Kit, Ethernet)        | SYSTXCCCAT501 |
| Infinity System Access Module (Remote Access Kit, WiFi – Ethernet) | SYSTXCCWIFI01 |

\* A combination of Infinity Smart Sensors and Infinity Remote Room Sensors can be used in the zones.

## REPLACEMENT ACCESSORIES

| Description                        | Part No.         |
|------------------------------------|------------------|
| Outdoor Sensor                     | TSTATCCSEN01 – B |
| Damper Control Module 1 – amp Fuse | ATO1*            |

\*Available from RCD

## DAMPERS

| Description         | Part No.                     |
|---------------------|------------------------------|
| Round Dampers       | 6" / 152.4 mm                |
|                     | DAMPRND06INC – B             |
|                     | 8" / 203.2 mm                |
|                     | DAMPRND08INC – B             |
|                     | 10" / 254 mm                 |
|                     | DAMPRND10INC – B             |
| Rectangular Dampers | 12" / 304.8 mm               |
|                     | DAMPRND12INC – B             |
|                     | 14" / 355.6 mm               |
|                     | DAMPRND14INC – B             |
|                     | 16" / 406.4 mm               |
|                     | DAMPRND16INC – B             |
|                     | 8" X 10" / 203.2 X 254 mm    |
|                     | DAMPREC08X10 – B             |
|                     | 8" X 14" / 203.2 X 355.6 mm  |
|                     | DAMPREC08X14 – B             |
|                     | 8" X 18" / 203.2 X 457.2 mm  |
|                     | DAMPREC08X18 – B             |
|                     | 8" X 24" / 203.2 X 609.6 mm  |
|                     | DAMPREC08X24 – B             |
|                     | 10" X 10" / 304.8 X 304.8    |
|                     | DAMPREC10X10 – B             |
|                     | 10" X 14" / 304.8 X 355.6 mm |
|                     | DAMPREC10X14 – B             |
|                     | 10" X 18" / 304.8 X 457.2 mm |
|                     | DAMPREC10X18 – B             |
|                     | 10" X 24" / 304.8 X 609.6 mm |
|                     | DAMPREC10X24 – B             |

## DAMPERS (cont)

SYSTXCCUIZ01-B

| Description     |                                            | Part No.       |
|-----------------|--------------------------------------------|----------------|
| Slip-In Dampers | Side mount, 8" X 8" / 203.2 X 203.2 mm     | DAMPSSL08X08-B |
|                 | Bottom mount, 8" X 8" / 203.2 X 203.2 mm   | DAMPSLB08X08-B |
|                 | Side mount, 8" X 10" / 203.2 X 254 mm      | DAMPSSL08X10-B |
|                 | Bottom mount, 8" X 10" / 203.2 X 254 mm    | DAMPSLB08X10-B |
|                 | Side mount, 8" X 12" / 203.2 X 304.8 mm    | DAMPSSL08X12-B |
|                 | Bottom mount, 8" X 12" / 203.2 X 304.8 mm  | DAMPSLB08X12-B |
|                 | Side mount, 8" X 14" / 203.2 X 355.6 mm    | DAMPSSL08X14-B |
|                 | Bottom mount, 8" X 14" / 203.2 X 355.6 mm  | DAMPSLB08X14-B |
|                 | Side mount, 8" X 16" / 203.2 X 406.4 mm    | DAMPSSL08X16-B |
|                 | Bottom mount, 8" X 16" / 203.2 X 406.4 mm  | DAMPSLB08X16-B |
|                 | Side mount, 8" X 18" / 203.2 X 457.2 mm    | DAMPSSL08X18-B |
|                 | Bottom mount, 8" X 18" / 203.2 X 457.2 mm  | DAMPSLB08X18-B |
|                 | Side mount, 8" X 20" / 203.2 X 508 mm      | DAMPSSL08X20-B |
|                 | Bottom mount, 8" X 20" / 203.2 X 508 mm    | DAMPSLB08X20-B |
|                 | Side mount, 8" X 22" / 203.2 X 558.9 mm    | DAMPSSL08X22-B |
|                 | Bottom mount, 8" X 22" / 203.2 X 558.9 mm  | DAMPSLB08X22-B |
|                 | Side mount, 8" X 24" / 203.2 X 609.6 mm    | DAMPSSL08X24-B |
|                 | Bottom mount, 8" X 24" / 203.2 X 609.6 mm  | DAMPSLB08X24-B |
|                 | Side mount, 10" X 10" / 254 X 254 mm       | DAMPSSL10X10-B |
|                 | Bottom mount, 10" X 10" / 254 X 254 mm     | DAMPSLB10X10-B |
|                 | Side mount, 10" X 12" / 254 X 304.8 mm     | DAMPSSL10X12-B |
|                 | Bottom mount, 10" X 12" / 254 X 304.8 mm   | DAMPSLB10X12-B |
|                 | Side mount, 10" X 14" / 254 X 355.6 mm     | DAMPSSL10X14-B |
|                 | Bottom mount, 10" X 14" / 254 X 355.6 mm   | DAMPSLB10X14-B |
|                 | Side mount, 10" X 16" / 254 X 406.4 mm     | DAMPSSL10X16-B |
|                 | Bottom mount, 10" X 16" / 254 X 406.4 mm   | DAMPSLB10X16-B |
|                 | Side mount, 10" X 18" / 254 X 457.2 mm     | DAMPSSL10X18-B |
|                 | Bottom mount, 10" X 18" / 254 X 457.2 mm   | DAMPSLB10X18-B |
|                 | Side mount, 10" X 20" / 254 X 508 mm       | DAMPSSL10X20-B |
|                 | Bottom mount, 10" X 20" / 254 X 508 mm     | DAMPSLB10X20-B |
|                 | Side mount, 10" X 22" / 254 X 558.9 mm     | DAMPSSL10X22-B |
|                 | Bottom mount, 10" X 22" / 254 X 558.9 mm   | DAMPSLB10X22-B |
|                 | Side mount, 10" X 24" / 254 X 609.6 mm     | DAMPSSL10X24-B |
|                 | Bottom mount, 10" X 24" / 254 X 609.6 mm   | DAMPSLB10X24-B |
|                 | Side mount, 12" X 12" / 304.8 X 304.8 mm   | DAMPSSL12X12-B |
|                 | Bottom mount, 12" X 12" / 304.8 X 304.8 mm | DAMPSLB12X12-B |
|                 | Side mount, 12" X 14" / 304.8 X 355.6 mm   | DAMPSSL12X14-B |
|                 | Bottom mount, 12" X 14" / 304.8 X 355.6 mm | DAMPSLB12X14-B |
|                 | Side mount, 12" X 16" / 304.8 X 406.4 mm   | DAMPSSL12X16-B |
|                 | Bottom mount, 12" X 16" / 304.8 X 406.4 mm | DAMPSLB12X16-B |
|                 | Side mount, 12" X 18" / 304.8 X 457.2 mm   | DAMPSSL12X18-B |
|                 | Bottom mount, 12" X 18" / 304.8 X 457.2 mm | DAMPSLB12X18-B |
|                 | Side mount, 12" X 20" / 304.8 X 508 mm     | DAMPSSL12X20-B |
|                 | Bottom mount, 12" X 20" / 304.8 X 508 mm   | DAMPSLB12X20-B |
|                 | Side mount, 14" X 14" / 355.6 X 355.6 mm   | DAMPSSL14X14-B |
|                 | Bottom mount, 14" X 14" / 355.6 X 355.6 mm | DAMPSLB14X14-B |
|                 | Side mount, 14" X 16" / 355.6 X 406.4 mm   | DAMPSSL14X16-B |
|                 | Bottom mount, 14" X 16" / 355.6 X 406.4 mm | DAMPSLB14X16-B |
|                 | Side mount, 14" X 20" / 355.6 X 508 mm     | DAMPSSL14X20-B |
|                 | Bottom mount, 14" X 20" / 355.6 X 508 mm   | DAMPSLB14X20-B |
|                 | Side mount, 16" X 16" / 406.4 X 406.4 mm   | DAMPSSL16X16-B |
|                 | Bottom mount, 16" X 16" / 406.4 X 406.4 mm | DAMPSLB16X16-B |
|                 | Bottom mount, 16" X 20" / 406.4 X 508 mm   | DAMPSLB16X20-B |

## DAMPER REPLACEMENT ACCESSORIES

| Description |                                      | Part No.       |
|-------------|--------------------------------------|----------------|
| Actuators   | 45° Actuator for round dampers       | DAMPACT45DEG-R |
|             | 90° Actuator for rectangular dampers | DAMPACT90DEG-R |
|             | Damper Actuator Cover                | DAMPACTXXCOV   |
|             | Damper Control Module 1-amp Fuse     | ATO1*          |

\*Available from RCD.

## PRODUCT DATA INFORMATION

### Compatible Communicating Products

Air Conditioning units - 24AN1, 24ANA7, 24APA5, 24APA3  
Heat Pumps - 25HNA6, 25HNA9, 25HPA3, 25HPA4, 25HPA5  
Gas Furnace - 58MVB, 58MVC, 58CVA, 58UVB  
Fan Coils - FE  
Small Packaged Products - 50XL/XT, 50DU/DT, 50CE/CR, 48XL/XT, 48DU/DT, 48CE

### Physical Characteristics of SYSTXCCUIZ01

**Dimensions:** See drawing

**Appearance:** Plastic, white color, textured

### Physical Characteristics of SYSTXCCSMS01

**Dimensions:** 4.0" / 101.6 mm high x 3.4" / 86.4 mm wide x 1.0" / 25.4 mm deep

**Appearance:** Plastic, white color, textured

### Physical Characteristics of SYSTXCCRRS01

**Dimensions:** 2.5" / 63.5 mm high x 3.3" / 83.8 mm wide x 0.75" / 19.1 mm deep

**Appearance:** Plastic, white color, textured

### Electrical Characteristics/Communication

#### Input Volts/Amps 24VAC

Each device in the Infinity System has a four-pin connector labeled ABCD. It is recommended that the following color code be used when wiring each device:

- A — Green = Data A
- B — Yellow = Data B
- C — White = 24VAC (Com)
- D — Red = 24VAC (Hot)

### Environmental Requirements:

#### Operating Temperature/Relative Humidity:

User interface and all sensors: 32°F to 104°F / 0°C to 40°C, 95% rh non-condensing

#### Storage Temperature/Relative Humidity:

User interface: -40°F to 134°F / -40°C to 56.7°C, 95% rh non-condensing

Damper Control Module: -40°F to 185°F / -40°C to 85°C, 41% rh non-condensing

### Program Specifications:

Temperature setpoint range: 40°F to 90°F / 4.4°C to 32.2°C

Separate heat and cool setpoints

Programming days: 7 day

Programming periods: 2-Day, Sleep

4-Wake, Day, Eve, Sleep

Auto changeover (may be disabled)

Programmable fan (installer selectable)

Humidity Sensor Offsets

Auto Changeover Timer (installer adjustable)

Smart Recovery (in heating and cooling)

Hold function

Copy functions: Copy period, day and zone

Permanent memory

Humidity display and control

Temperature sensor offsets (indoor and outdoor)

TrueSense™ Dirty Filter Detection

### Wiring Requirements:

**Power supply:** Dedicated 24VAC, 40 va, 60 Hz, via indoor equipment ABCD Connector. Isolated transformer, field supplied.

**Wiring material:** Standard thermostat wire 18 to 24 gauge.

