

1-Way Cassette Heat Pump Ductless System

Indoor Model: D5FSOAH06XAK

Job Data:

Location:

Tag #:


Carrier#:

Date:



- INDOOR STANDARD FEATURES
- Modes: Cool, Heat, Dry, Fan, Auto
  - Designed to be mounted between 16" joists
  - Four fan speeds
  - Sleep Mode
  - Follow Me (senses temperature at handheld remote)
  - Refrigerant Leak Detection Sensor
  - Auto-Restart function
  - Quiet indoor operation
  - Anti-corrosive fin coating
- RESIDENTIAL APPLICATION LIMITED WARRANTY\*
- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

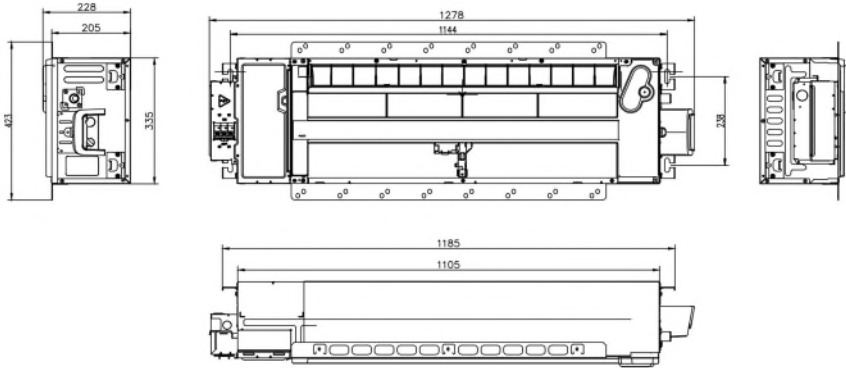

| INDOOR UNIT DIMENSIONS |      |       |       |      |
|------------------------|------|-------|-------|------|
| Capacity               | Unit | W     | D     | H    |
| 6K ~ 18K               | mm   | 1278  | 335   | 228  |
|                        | inch | 50.31 | 13.19 | 8.98 |



| D5FSOAH06XAK    |                                                |                                     |                      |
|-----------------|------------------------------------------------|-------------------------------------|----------------------|
| System          | Indoor Model #                                 |                                     | D5FSOAH06XAK         |
|                 | Indoor Size                                    |                                     | 6000                 |
| Electrical      | Voltage, Phase, Cycle                          | V/Ph/Hz                             | 208-230/1/60         |
|                 | Power Supply                                   | Indoor unit powered by outdoor unit |                      |
|                 | MCA                                            | A.                                  | 3                    |
| Piping          | Pipe Connection Size - Liquid                  | in (mm)                             | 1/4in(6.35mm)        |
|                 | Pipe Connection Size - Suction                 | in (mm)                             | 3/8in(9.52mm)        |
| Operating Range | Cooling Indoor DB Min - Max                    | °F(°C)                              | 60~90(16~32)         |
|                 | Heating Indoor DB Min - Max                    | °F(°C)                              | 32~86(0~30)          |
| Indoor Coil     | Face Area                                      | Sq. Ft.                             | 2.81                 |
|                 | No. Rows                                       |                                     | 2                    |
|                 | Fins per inch                                  |                                     | 20                   |
|                 | Circuits                                       |                                     | 3                    |
| Indoor Unit     | Number of Fan Speeds                           |                                     | 1024/944/784         |
|                 | Airflow (highest to lowest)                    | CFM                                 | 294.12/258.82/235.29 |
|                 | Sound Pressure (highest to lowest)             | dB(A)                               | 37.5/35.5/32.5/23.5  |
|                 | Moisture Removal                               | L/h                                 | 0.34                 |
|                 | Air Throw Data                                 | ft(m)                               | 22.97(7)             |
| Dimensions      | Height                                         | in (mm)                             | 8.98(228)            |
|                 | Width                                          | in (mm)                             | 50.31(1278)          |
|                 | Depth                                          | in (mm)                             | 13.19(335)           |
|                 | Net Weight                                     | lbs (kg)                            | 45.19(20.5)          |
|                 | Shipping Height                                | in (mm)                             | 22.64(575)           |
|                 | Shipping Width                                 | in (mm)                             | 57.60(1463)          |
|                 | Shipping Depth                                 | in (mm)                             | 22.48(571)           |
|                 | Shipping Net Weight                            | lbs (kg)                            | 82.45(37.4)          |
| CONTROLS        |                                                |                                     |                      |
| Standard        | Wireless Remote Controller (°F/°C Convertible) |                                     |                      |
| Optional        | Wired Remote Control 7 Day Programmable        |                                     | KSACN1401AAA         |
|                 | Wired Remote Control with Timer Function       |                                     | KSACN1201AAA         |
|                 | Wi-Fi™ Kit High Wall                           |                                     | KSAIF0701AAA         |
|                 | 24V Mini Interface                             |                                     | KSAIC0601230         |



R-454B