

High Wall Residential Cooling Only System

Indoor Model: 40GVC012---3

Outdoor Model: 38GVC012---3



turn to the experts

Submittal Data

Job Data: _____ Location: _____

Buyer: _____ Buyer P.O. #: _____ Carrier #: _____

Unit Number: _____ Model Number: _____

Performance Data Certified By: _____ Date: _____



Performance
SERIES

(Unless otherwise indicated, data applies to both indoor and outdoor models)

System	Size	12
	Outdoor Model	38GVC012---3
	Indoor Model	40GVC012---3
Performance	Cooling Rated Capacity Btu/h	12,000
	Cooling Cap. Range Min. - Max Btu/h	3,300 - 12,500
	SEER / EER	16 / 9.8
Controls	Wireless (°C, °F, Convertible)	Standard - Convertible
	Wired (°C, °F, Convertible)	Not Available
Operating Range	Cooling Outdoor Min - Max DB °F	5 - 109
	Cooling Indoor DB Min -Max °F	61 - 95
Piping	Total Piping Length ft.	50
	Piping Lift ft.	33
	Pipe Connection Size - Mixed Phase (in)	1/4
	Pipe Connection Size - Vapor (in)	3/8


Electrical	Voltage	208/230-1-60
	Power Supply	Indoor unit powered from outdoor unit
	Outdoor - MCA	10
Outdoor	Outdoor - Fuse Rating (MOCP)	15
	Dimensions (W X H X D) In	28.0 x 21.7 x 12.5
	Net Weight (lbs.)	63.8
Indoor	Sound Pressure dBA	52
	Dimensions (W X H X D) In	30.3 x 11.1 x 7.9
	Net Weight (lbs.)	19.8
	Number of Fan Speeds	4
	Airflow (L / M / H / T) CFM	200 / 235 / 288 / 341
	Sound Pressure dBA (L / M / H / T)	28 / 33 / 39 / 44

Accessories

Condensate Pump 208/230V

Insulated 25' Line Set - 1/4" x 3/8"

Construction View Indoor Unit 40GVC012---3

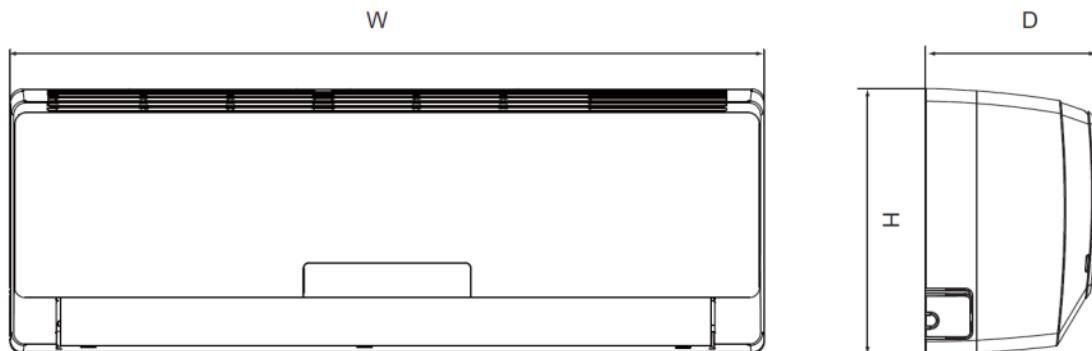

Unit Size	W In. (mm)	H In. (mm)	D In. (mm)	Net Operating Weight Lbs. (Kg)
12 K	30.3 (770)	11.1 (283)	7.9 (201)	19.8 (9.0)

Construction View Outdoor Unit 38GVC012---3

