




Product Data

58MTA Highly-Efficient 4-Way Multipoise Fixed-Capacity Direct-Vent Deluxe Condensing Gas Furnace

Series 101
Input Capacities: 60,000 thru 120,000 Btuh

ComfortHeat
TECHNOLOGY

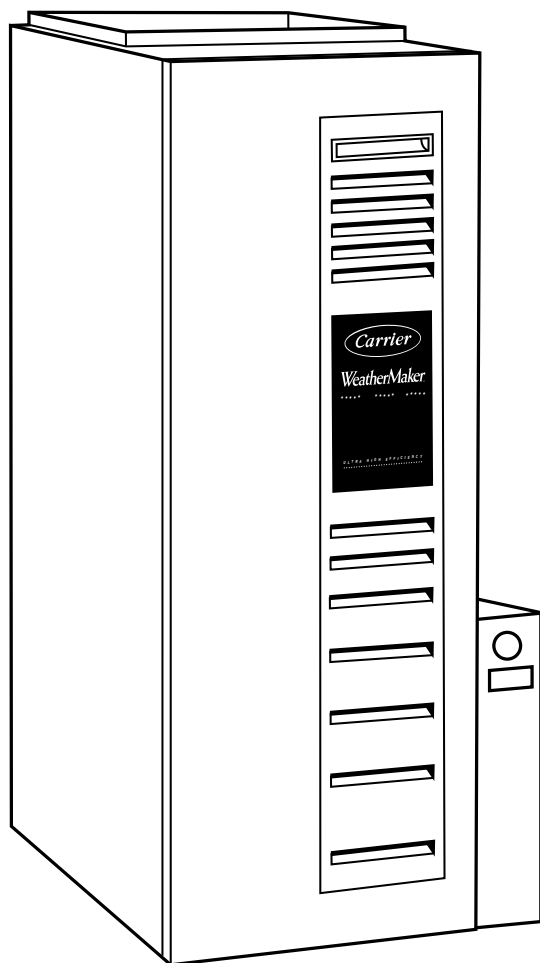

4-Way Multipoise Design Allows More Applications . . .

The model 58MTA is a must for your product line. This high-efficiency furnace allows more applications with its reliable 4-way multipoise design. The model 58MTA is available in 6 heat/airflow combinations and with the 4-way multipoise design can be installed in upflow, downflow, or horizontal positions. The furnace is factory configured for upflow application.

This versatile unit utilizes hot surface ignition (HSI) which ignites the burners directly. HSI eliminates gas waste that typical continuous-pilot designs can bring. Hot surface ignition provides reliable start-up and operation.

Take a look at the control center on model 58MTA. Control of ignition, inducer, and blower operation is all handled in 1 central printed circuit board. The status indicator on the control signals when a fault has occurred and identifies where the problem is. This, along with the component test feature, makes the 58MTA one of the easiest gas furnaces to troubleshoot.

High efficiency is achieved by maximizing heat transfer. The model 58MTA uses 100 percent outdoor air for combustion in a sealed-combustion system. The result is energy-saving efficiency, up to 93 percent Annual Fuel Utilization Efficiency (AFUE), and reduced operational noise.

A unique feature of this unit is the patented polypropylene-laminated heat exchanger. This secondary heat exchanger ensures that all available heat is properly transferred to the airstream and throughout the home. Using the exclusive flow-through design, the secondary heat exchanger reduces the pressure drop in the furnace which leads to lower electrical usage, an important

part of this unit's efficiency. Carrier heat exchangers are backed by a Limited Lifetime Warranty. (See Warranties section for details.)

When we put it all together, the model 58MTA combines quality and design to bring high efficiency and comfort. You will enjoy the versatility and ease of installation of this unit. The model 58MTA is equipped for either left- or right-side connections. Blower speeds are easily adjustable with speed-taps conveniently located on the control center. An updated, more efficient combustion inducer allows for more use of 2-in. vent and combustion-air piping, keeping installation costs low.

As with other Carrier furnaces, this model is designed to work as a part of the total home comfort system which includes elements for cooling, air cleaning, humidification, ventilation, and zoning.

58MTA FEATURES/ BENEFITS

4-Way Multipoise Design — Allows the model 58MTA to be installed in an upflow, downflow, or horizontal orientation. Factory configured for upflow applications with only simple drain connection changes required for conversion to downflow or horizontal.

Media Filter Cabinet — Enhanced indoor air quality in your home is made easier with our media filter cabinet—a standard accessory on all furnaces.

When installed as a part of your system, this cabinet allows for an easy and convenient addition of a Carrier high-efficiency air filter.

Two Stage Gas Valve — The 58MTA has a 2-stage gas valve to vary the amount of gas being used from low-heat to high-heat stage. The low-stage operation allows longer running periods, which helps maintain your most comfortable temperature, prevents drafts, reduces noise, and enhances the air quality of your home. During the extreme cold, the high-heat levels will run to ensure that you are still comfortable.

Permanent split capacitor (PSC)

Blower Motor — The 58MTA has a PSC blower motor that has several preselected fixed speeds which can be customized to duct work installation requirements. The motor has a wide application of use, a basic control scheme, and is extremely reliable.

Two-Speed Inducer Motor — This motor works with the inducer fan to optimize combustion efficiency and exhaust the flue gases out of the house. The motor has two speeds and an incorporated fan to keep the motor cool while reducing sound.

Adaptive Logic Control Board — This self-adjusting control board contains a computer chip which automatically calculates the precise amount of time your furnace should run and at what speed it should run to obtain the best

comfort and energy efficiency. This control board also includes an extensive troubleshooting and component test sequence that can monitor your heating system to ensure that it is operating properly.



Primary Heat Exchanger &

Secondary Heat Exchanger — The primary heat exchanger is corrosion resistant and maintains a proven track record for long-term reliability and high-efficiency performance. The secondary heat exchanger is built with a patented lamination process that bonds a corrosion-proof lining of polypropylene to a heavy, galvanized steel shell. The unique secondary clamshell design allows wider spacing between cells for reduced air resistance through the furnace, reduced load on the blower motor, and reduced need for cleaning.

Hot Surface Ignitor — This electronic ignition prevents wasted gas associated with pilot lights.


Soft Motor Mounts — These motor mounts help to absorb shock, decrease the vibration of the motor, and minimize noise.

Full Cabinet Insulation — This insulation completely surrounds the internal furnace casing allowing for reduced and dampened sounds and maintained efficiencies.




A92505

HEAT EXCHANGERS

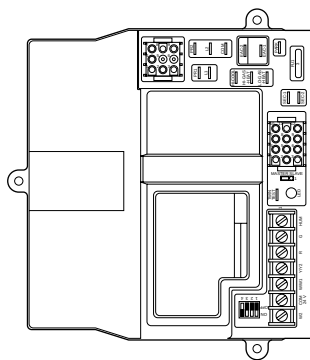


A93150

CONTROL CENTER

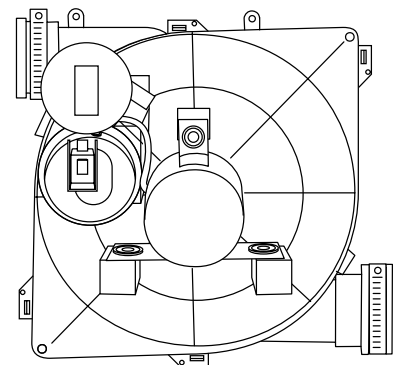

A01160


INDUCER ASSEMBLY

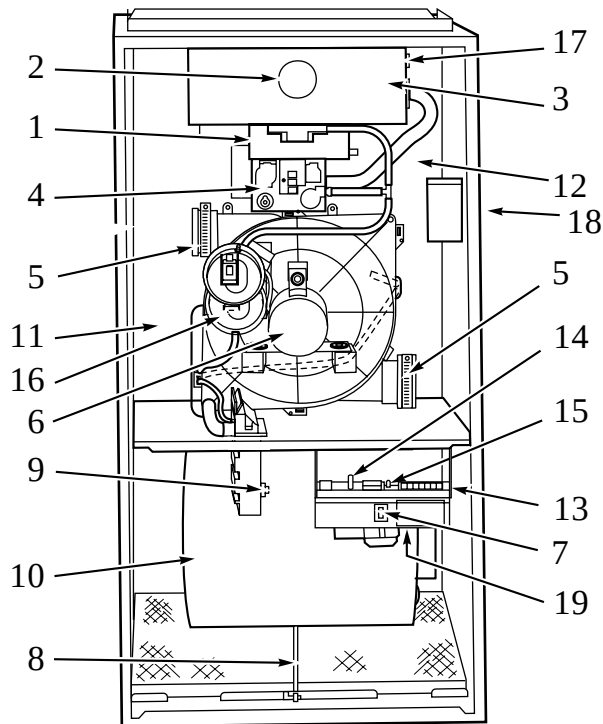

A01161

- 1** Combustion-air intake connection to ensure contaminant-free air (right or left side).
- 2** Burner sight glass for viewing burner flame.
- 3** Burner assembly (inside). Operates with inshot burners and hot surface igniter for safe, dependable heating.
- 4** Redundant gas valve. Safe, efficient. Features 1 gas control with 2 internal shutoff valves.
- 5** Vent outlet. Uses PVC pipe to carry vent gases from the furnaces combustion system (right or left side).
- 6** Inducer motor. Pulls hot flue gases through the heat exchangers, maintaining negative pressure for added safety.
- 7** Blower access panel safety interlock switch.
- 8** Air filter and retainer.
- 9** Condensate drain connection. Collects moisture condensed from burned gases for disposal into home drain system.
- 10** Heavy-duty blower. Circulates air across the heat exchangers to transfer heat into the home.
- 11** Secondary condensing heat exchanger (inside). Wrings out more heat through condensation. Constructed with Polypropylene-laminated steel to ensure durability.
- 12** Primary serpentine heat exchanger (inside). Stretches fuel dollars with the S-shaped heat-flow design. Solid construction of corrosion-resistant aluminized steel means reliability.
- 13** Control center.
- 14** 3-amp fuse provides electrical and component protection.
- 15** Light emitting diode (LED) on control center. Code lights are for diagnosing furnace operation and service requirements.
- 16** Pressure switch(es) ensure adequate flow of flue products through furnace and out vent system.
- 17** Rollout switch (manual reset) to prevent overtemperature.
- 18** Junction box for 115-v electrical power supply. (May be on right or left side)
- 19** Transformer (24v) behind control center provides low-voltage power to furnace control center and thermostat.

Model number nomenclature

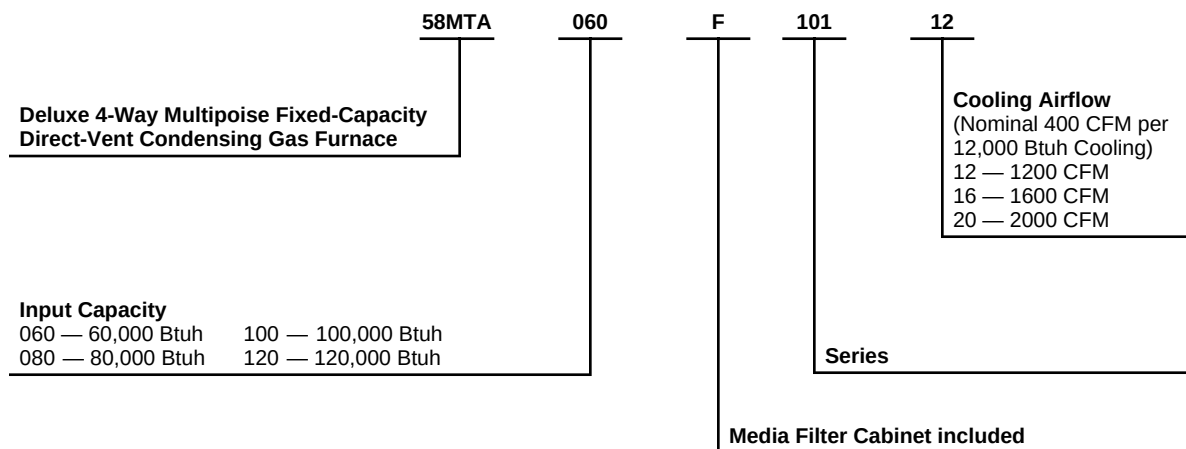

MEETS DOE RESIDENTIAL
CONSERVATION SERVICES
PROGRAM STANDARDS

Before purchasing this appliance,
read important energy cost and
efficiency information available
from your retailer.



As an ENERGY STAR®
Partner, Carrier
Corporation has
determined that this
product meets the
ENERGY STAR®
guidelines for energy
efficiency.



REGISTERED QUALITY SYSTEM

These products are engineered and
manufactured under an ISO 9001 registered
quality system.

Physical data

UNIT SIZE			060-12	080-12	080-16	100-16	100-20	120-20
OUTPUT CAPACITY * Nonweatherized IC (Shaded capacities are specified on rating plate)	Low	Upflow	37,000	49,000	49,000	61,000	61,000	74,000
		Downflow	37,000	49,000	49,000	61,000	61,000	74,000
		Horizontal	37,000	49,000	49,000	61,000	61,000	73,000
	High	Upflow	56,000	75,000	75,000	94,000	94,000	113,000
		Downflow	57,000	75,000	75,000	94,000	94,000	113,000
		Horizontal	56,000	75,000	75,000	94,000	94,000	112,000
INPUT BTUH†		Low	39,000	52,000	52,000	65,000	65,000	78,000
		High	60,000	80,000	80,000	100,000	100,000	120,000
SHIPPING WEIGHT (Lb)			163	172	175	193	196	252
CERTIFIED TEMPERATURE RISE RANGE °F		Low	20—50	30—60	30—60	25—55	30—60	30—60
		High	30—60	40—70	30—60	45—75	30—60	40—70
CERTIFIED EXT STATIC PRESSURE (In. wc)		Heating	0.12	0.15	0.15	0.20	0.20	0.20
		Cooling	0.50	0.50	0.50	0.50	0.50	0.50
AIRFLOW CFM‡		Heating Low	680	790	775	1175	1205	1215
		Heating High	1010	1130	1190	1315	1795	1770
		Cooling	1275	1380	1565	1570	2035	2075
LIMIT CONTROL			SPST					
HEATING BLOWER CONTROL (Off Delay)			Selectable 90, 135, 180, or 225 Sec					
BURNERS (Monoport)			3	4	4	5	5	6
GAS CONNECTION SIZE			1/2-in. NPT					
GAS VALVE (Redundant) Manufacturer			White-Rodgers					
Minimum Inlet Pressure (In. wc)			4.5 (Natural Gas)					
Maximum Inlet Pressure (In. wc)			13.6 (Natural Gas)					
IGNITION DEVICE			Hot Surface					

* Capacity in accordance with U.S. Government DOE test procedures.

† Gas input ratings are certified for elevations to 2000 ft. For elevations above 2000 ft, reduce ratings 2% for each 1000 ft above sea level. In Canada, derate the unit 5% for elevations 2000 to 4500 ft above sea level.

‡ Airflow shown is for bottom only return-air supply with factory supplied 1-in. washable filter(s).

- For air delivery above 1800 CFM, see Air Delivery table for other options.
- An airflow reduction of up to 7% may occur when using the factory-specified 4 5/16-inch wide, high efficiency media filter.
- For best furnace efficiency when using the 4 5/16-inch wide media filter, adjust the blower speed tap to near the mid-point of the rise range.

ICS—Isolated Combustion System;

Carrier accessories*

UNIT SIZE	060-12	080-12 080-16	100-16 100-20	120-20
GAS CONVERSION KIT — NATURAL-TO-PROPANE	KGANP2701LPS			
GAS CONVERSION KIT — PROPANE-TO-NATURAL	KGAPN2201ALL			
TWINNING KIT (Upflow Only)	KGATW0501HSI†			
DOWNFLOW BASE (For Combustible Floors)‡	KGASB0201ALL			
VENT TERMINATION KIT (Bracket Only for 2 Pipes)	2-in. — KGAVT0101BRA		3-in. — KGAVT0201BRA	
CONCENTRIC TERMINATION KIT (Single Exit)	2-in. — KGAVT0501CVT		3-in. — KGAVT0601CVT	
CONDENSATE FREEZE PROTECTION KIT	KGAHT0101CFP			
ELECTRONIC AIR CLEANER (EAC)	Model AIRA			
MECHANICAL AIR CLEANER	Model 31MF or MACA			
HUMIDIFIER	Models HUM			
HEAT RECOVERY VENTILATOR	Model HRV			
ENERGY RECOVERY VENTILATOR	Model ERV			
VENT/EXHAUST PIPE EXTERNAL TRAP KIT	KGAET0106ETK			

* Factory-authorized and field-installed. Gas conversion kits are A.G.A./C.G.A. recognized.

† For 16 and 20 airflow sizes only and in upflow application ONLY. See kit Installation Instructions for details.

‡ Required for installation on combustible floors when no coil box is used, or when any coil box other than a Carrier cased coil is used.

Thermostat and zoning control options

NON-PROGRAMMABLE THERMOSTAT SELECTION	
TSTATCCNAC01-B	For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover
TSTATCCNHP01-B*	For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover
TSTATCCN2S01-B*	For use with 2-spd. Air Conditioner - deg. F/C, Auto Changeover
TSTATCCBAC01-B	For use with 1-spd. Air Conditioner - deg. F/C
TSTATCCPRH01-B**	For multi-use / stage configurations - deg. F/C, Auto Changeover/Temperature and Humidity Control

* Model HP and 2S thermostat must be field converted to air conditioner operation.

**Thermidistat control is versatile and can be configured for multiple use and staging, it must be configured for each specific application.


PROGRAMMABLE THERMOSTAT SELECTION	
TSTATCCPAC01-B	For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover, 7-Day Programmable
TSTATCCPHP01-B*	For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover, 7-Day Programmable
TSTATCCP2S01-B*	For use with 2-spd. Air Conditioner - deg. F/C, Auto Changeover, 7-Day Programmable
TSTATCCSAC01	For use with 1-spd. Air Conditioner - deg. F/C, 5-2 Day Programmable
TSTATCCPDF01-B**	For use with multi-stage applications - deg. F/C, Auto Changeover, 7-Day Programmable
TSTATCCPRH01-B***	For multi-use / stage configurations - deg. F/C, Auto Changeover, 7-Day Programmable/Temperature and Humidity Control

* Model HP and 2S thermostat must be field converted to air conditioner operation.

**Dual Fuel thermostat is used with furnace and heat pump application

***Thermidistat control can be configured for multiple use and staging, it must be configured for each specific application.

ZONING CONTROL SELECTION	
ZONEKIT2ZCAR	WeatherMaker Two-Zone kit
ZONECC2KIT01-B	Comfort Zone II-B 2-Zone kit/Temperature and Humidity Control
ZONECC4KIT01-B	Comfort Zone II-B 4-Zone kit/Temperature and Humidity Control
ZONECC8KIT01-B	Comfort Zone II-B 8-Zone kit/Temperature and Humidity Control




A93086

CONCENTRIC VENT

A concentric vent kit allows vent and combustion-air pipes to terminate through a single exit in a roof or side wall.


One pipe runs inside the other allowing venting through the inner pipe and combustion air to be drawn in through the outer pipe.



A88202

DOWNFLOW SUBBASE


One base fits all furnace sizes. The base is designed to be installed between the furnace and a combustible floor when no coil box is used or when a coil box other than a Carrier cased coil is used. It is A.G.A./C.G.A. design certified for use with Carrier 58MTA furnaces when installed in downflow applications.



A96214

CK5 CASSED COIL (as shown)


The CD5 or CK5 Cased Coil is an upflow/downflow furnace coil which can also replace the downflow subbase when installing the 58MTA on combustible flooring in the downflow orientation.



A97152

ELECTRONIC AIR CLEANER


Cleans the air of smoke, dirt, and many pollens commonly found. Saves decorating and cleaning expenses by keeping carpets, furniture, and drapes cleaner.



A95248

HUMIDIFIER

By adding moisture to winter-dry air, a Carrier humidifier can often improve comfort and keeps woodwork, wallpaper, and paint in better condition. Moisturizing household air also helps to retain normal body heat and provides comfort at lower temperatures.




A99250

CONTROLS: THERMOSTATS AND ZONING

Available in programmable and non-programmable models, Carrier thermostats maintain a constant, comfortable temperature level in the home.

For the ultimate in home comfort, Carrier's 2, 4 and 8-zone systems allow temperature control of individual "zones" of the home. This is accomplished through a series of electronic dampers and remote room sensors. The 4-zone system is shown.



A94336

ENERGY/HEAT RECOVERY VENTILATOR

Carrier's energy or heat recovery ventilators exhaust stale indoor air and provide fresh outdoor air to the home while minimizing heat loss and humidity level. Especially useful for today's tighter constructed houses.

Energy recovery ventilator is shown.

8



NOTES: Minimum return-air opening at furnace, based on metal duct. If flex duct is used, see flex duct manufacturer's recommendation for equivalent diameters.

1. For 800 CFM—16-in. round or 14-1/2 x 12-in. rectangle.
2. For 1200 CFM—20-in. round or 14-1/2 x 19-1/2 in. rectangle.
3. For 1600 CFM—22-in. round or 14-1/2 x 23-1/4 in. rectangle.
4. For airflow requirements above 1800 CFM, see Air Delivery Table in Product Data literature for specific use of single side inlets. The use of both side inlets, a combination of 1 side and the bottom, or the bottom only will ensure adequate return-air openings for airflow requirements above 1800 CFM.


DIMENSIONS (In.)

UNIT SIZE	A	D	E
060-12	17-1/2	15-7/8	16
080-12	17-1/2	15-7/8	16
080-16	17-1/2	15-7/8	16
100-16	21	19-3/8	19-1/2
100-20	21	19-3/8	19-1/2
120-20	24-1/2	22-7/8	23

DOWNFLOW SUBBASE — DIMENSIONS (In.)


FURNACE CASING WIDTH	FURNACE IN DOWNFLOW APPLICATION	PLENUM OPENING*		FLOOR OPENING		HOLE NO. FOR WIDTH ADJUSTMENT
		A	B	C	D	
17-1/2	Furnace with or without CD5 or CK5 Coil Assembly or KCAKC Coil Box	15-1/8	19	16-3/4	20-3/8	3
21	Furnace with or without CD5 or CK5 Coil Assembly or KCAKC Coil Box	18-5/8	19	20-1/4	20-3/8	2
24-1/2	Furnace with or without CD5 or CK5 Coil Assembly or KCAKC Coil Box	22-1/8	19	23-3/4	20-3/8	1

* The plenum should be constructed 1/4 in. smaller in width and depth than the plenum dimensions shown above.

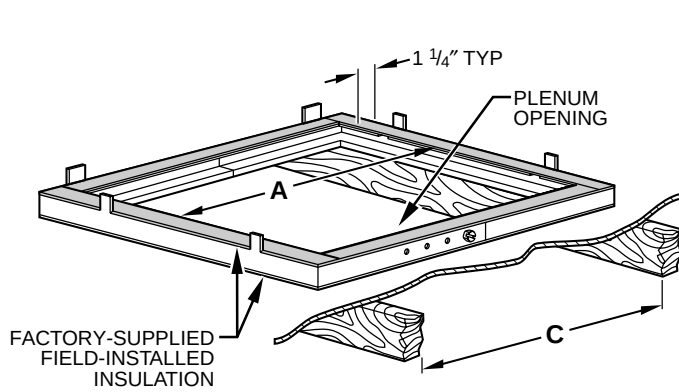

A97427


Assembled

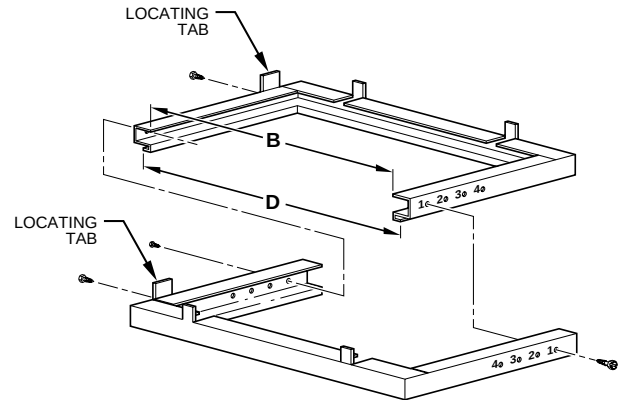

A88207

Disassembled

CONCENTRIC VENT

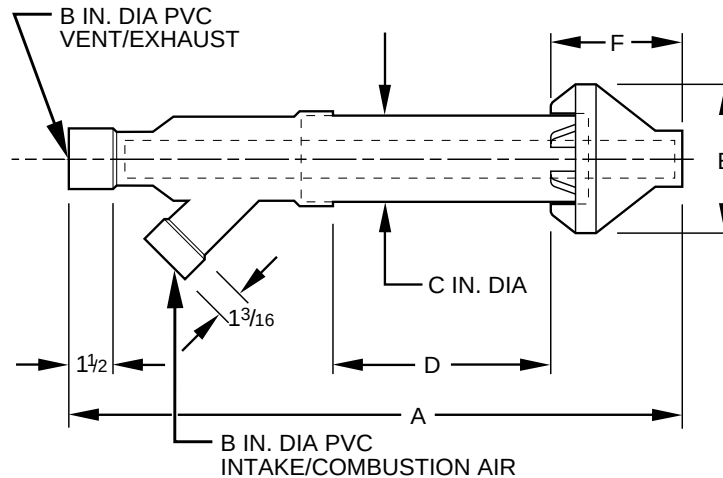

A97110



DIMENSIONS (In.)

KIT PART NO.	A*	B	C	D†	E	F
KGAVT0501CVT	33-3/8	2	3-1/2	16-5/8	6-1/4	5-3/4
KGAVT0601CVT	38-7/8	3	4-1/2	21-1/8	7-3/8	6-1/2

* Dimension A will change accordingly as dimension D is lengthened or shortened.


† Dimension D may be lengthened to 60 in. maximum. Dimension D may also be shortened by cutting the pipes provided in the kit to 12 in. minimum.

CONDENSATE TRAP

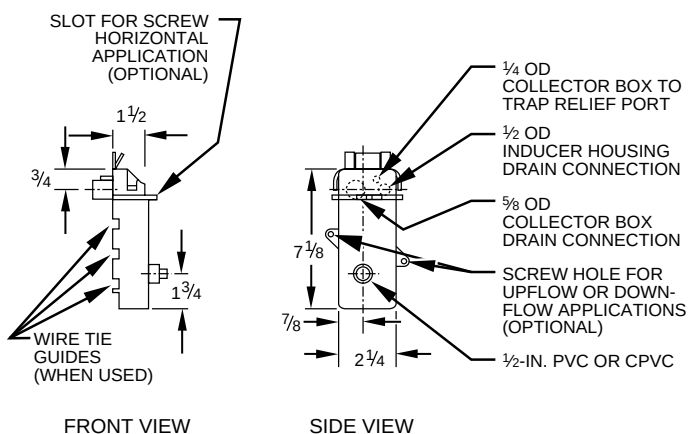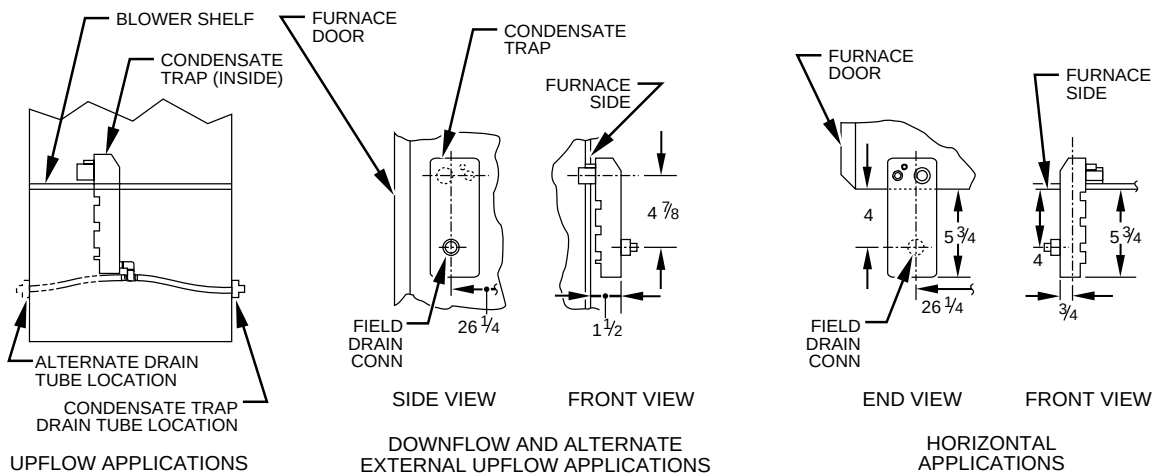

A93026

MEDIA FILTER CABINET

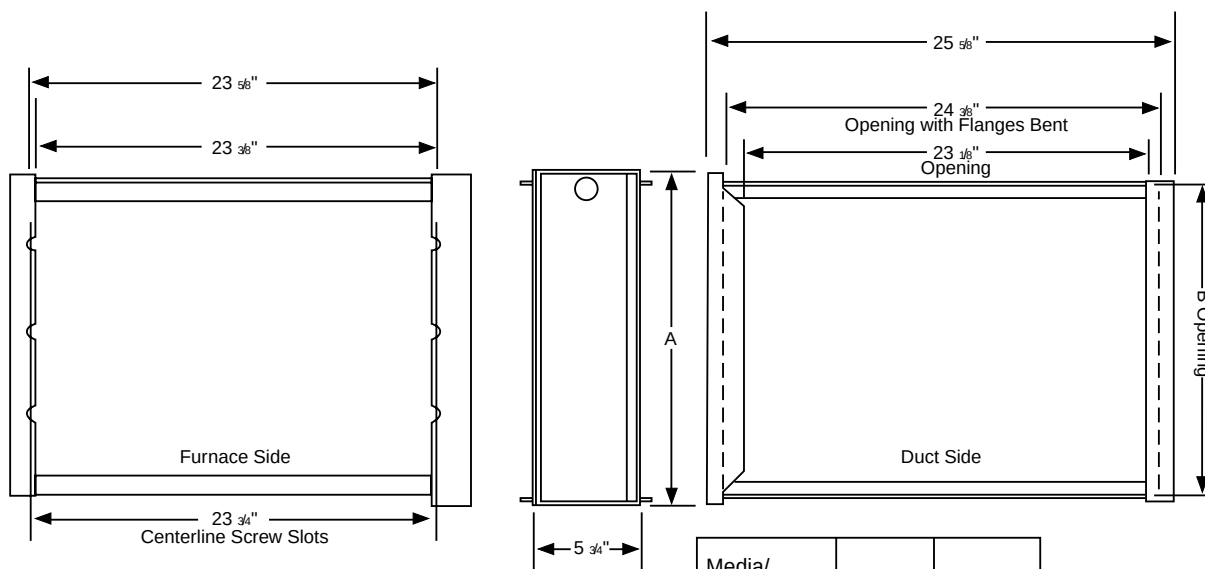

Media/ Filter Cabinet	A	B
16"	17	16"
20"	21	20"
24"	25	24"

A00309

Performance data

UNIT SIZE	060-12	080-12	080-16	100-16	100-20	120-20
DIRECT-DRIVE MOTOR Hp (PSC)	1/3	1/3	1/2	1/2	3/4	3/4
MOTOR FULL LOAD AMPS	5	5	7.4	7.9	11	11
RPM (Nominal) — SPEEDS	1075—5	1075—5	1075—5	1075—4	1075—5	1075—5
BLOWER WHEEL DIAMETER X WIDTH (In.)	10 x 7	10 x 7	11 x 8	11 x 8	11 x 10	11 x 10
FILTER SIZE (In.) — (Washable)	(1) 16 x 25 x 1			(1) 20 x 25 x 1		(1) 24 x 25 x 1

PSC—Permanent Split Capacitor

EFFICIENCY

UNIT SIZE		060-12	080-12	080-16	100-16	100-20	120-20
AFUE%*	Upflow	93.0	93.0	93.0	93.0	93.0	93.0
	Downflow	91.5	91.5	91.5	91.5	91.5	91.5
Nonweatherized ICS	Horizontal	92.3	92.3	92.3	92.3	92.3	92.3

* Capacity and AFUE in accordance with U.S. Government DOE test procedures effective November 10, 1997.


ICS—Isolated Combustion System

Clearance to combustibles

INSTALLATION

This forced air furnace is equipped for use with natural gas at altitudes 0 - 10,000 ft (0 - 3,050m).
An accessory kit, supplied by the manufacturer, shall be used to convert to propane gas use or may be required for some natural gas applications.
This furnace is for indoor installation in a building constructed on site. This furnace may be installed in a manufactured (mobile) home when stated on rating plate and using factory authorized kit.
This furnace may be installed on combustible flooring in alcove or closet at minimum clearance from combustible material.
This appliance requires a special venting system. Refer to the installation instructions for parts list and method of installation. This furnace is for use with schedule-40 PVC, PVC-DWW, CPVC, or ABS-DWW pipe, and must not be vented in common with other gas-fired appliances. Construction through which vent/air intake pipes may be installed is maximum 24 inches (600 mm), minimum 3/4 inches (19 mm) thickness (including roofing materials).

Furnace must be installed level, or pitched forward within 1/2 inch of level for proper drainage. Failure will result in equipment or property damage. See Installation Manual for IMPORTANT unit support details on horizontal applications.

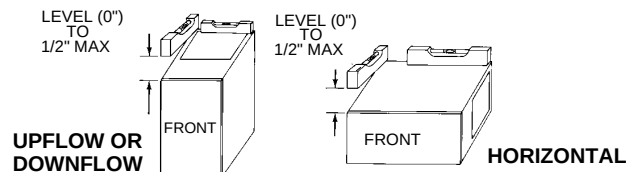

MINIMUM INCHES CLEARANCE TO COMBUSTIBLE CONSTRUCTION

ALL POSITIONS:

- * Minimum front clearance for service 30 inches (762mm).

DOWNFLOW POSITIONS:

†† For installation on combustible floors only when installed on special base No. KGASB0201ALL, Coil Assembly, Part No. CD5 or CK5, or Coil Casing, Part No. KCAKC.

HORIZONTAL POSITIONS:


Line contact is permissible only between lines formed by intersections of top and two sides of furnace jacket, and building joists, studs, or framing.

Clearance shown is for air inlet and air outlet ends.

Ø 120 size furnaces require 1 inch bottom clearance to combustible materials.

This furnace is approved for UPFLOW, DOWNFLOW and HORIZONTAL installations.

Clearance arrows do not change with furnace orientation.

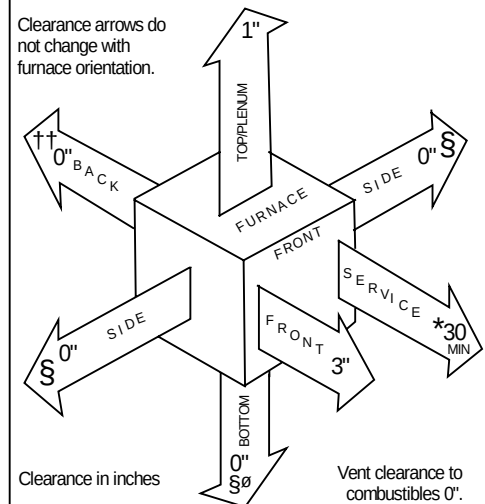

326476-201 REV. B (lit-top)

AIR DELIVERY—CFM (With Filter)*

UNIT SIZE CARRIER	RETURN-AIR SUPPLY	SPEED	EXTERNAL STATIC PRESSURE (In. wc)							
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
060-12	1 side or bottom	High	1490	1450	1400	1345	1275	1190	1080	960
		Med-High	1190	1180	1155	1120	1070	1005	915	810
		Med	1015	1010	995	965	920	875	800	715
		Med-Low	870	860	840	820	780	735	670	580
		Low	685	670	645	620	595	545	495	420
080-12	1 side or bottom	High	1605	1560	1510	1450	1380	1300	1195	1045
		Med-High	1305	1290	1265	1225	1175	1100	995	895
		Med	1135	1125	1110	1080	1030	965	885	800
		Med-Low	990	980	965	930	880	825	760	685
		Low	805	780	745	700	660	630	575	495
080-16	1 side or bottom	High	1810	1755	1690	1640	1565	1495	1410	1330
		Med-High	1420	1385	1350	1305	1260	1210	1145	1090
		Med	1205	1175	1135	1100	1060	1010	960	905
		Med-Low	1035	990	945	910	875	840	790	735
		Low	805	750	705	660	620	585	540	490
100-16	1 side or bottom	High	1740	1705	1660	1615	1570	1500	1425	1355
		Med-High	1500	1470	1445	1410	1375	1330	1280	1210
		Med-Low	1340	1315	1300	1270	1235	1200	1140	1095
		Low	1195	1175	1165	1130	1100	1070	1030	975
100-20	bottom only	High	2345	2265	2195	2110	2035	1940	1850	1745
		Med-High	2110	2065	2010	1945	1875	1800	1710	1615
		Med	1810	1795	1770	1725	1680	1615	1545	1460
		Med-Low	1480	1465	1440	1415	1375	1330	1260	1190
		Low	1235	1205	1180	1155	1115	1065	1015	950
	both sides or 1 side and bottom	High	2425	2365	2300	2240	2160	2080	1980	1880
		Med-High	2045	2025	2000	1965	1910	1850	1785	1695
	1 side only	High	2305	2235	2170	2100	2005	1925	1825	1730
		Med-High	2030	1995	1950	1905	1835	1775	1685	1600
120-20	bottom only	High	2385	2320	2245	2160	2075	1975	1870	1775
		Med-High	2105	2060	2005	1945	1880	1795	1710	1620
		Med	1785	1770	1740	1700	1650	1600	1525	1450
		Med-Low	1495	1470	1450	1420	1385	1335	1280	1220
		Low	1250	1215	1190	1155	1125	1085	1040	985
	both sides or 1 side and bottom	High	2475	2435	2385	2320	2260	2180	2095	1995
		Med-High	2085	2075	2055	2030	1980	1930	1865	1785
	1 side only	High	2255	2190	2115	2045	1965	1890	1800	1710
		Med-High	1985	1930	1890	1840	1780	1720	1645	1560

- * • Airflow shown is with factory supplied 1-in. washable filter.
• A filter is required for each return air opening.
• An airflow reduction of up to 7% may occur when using the factory-specified 4-5/16-inch wide, high efficiency media filter.
• For best furnace efficiency when using the 4 5/16-inch wide media filter, adjust blower speed tap to near the mid-point of the rise range.

Combustion-air and vent piping

MAXIMUM ALLOWABLE PIPE LENGTH (FT)

ALTITUDE ABOVE SEA LEVEL (FT)	UNIT SIZE	TERMINATION TYPE	PIPE DIA (IN.)*	NUMBER OF 90° ELBOWS					
				1	2	3	4	5	6
0 to 2000	060-12	2 Pipe or 2-In. Concentric	1-1/2	20	15	10	5	NA	NA
			2	70	70	70	70	70	70
	080-12 080-16	2 Pipe or 2-In. Concentric	1-1/2	10	NA	NA	NA	NA	NA
			2	55	50	35	30	30	20
			2-1/2	70	70	70	70	70	70
	100-16 100-20	2 Pipe or 3-In. Concentric	2	5	NA	NA	NA	NA	NA
			2-1/2	40	30	20	20	10	NA
			3	70	70	70	70	70	70
	120-20	2 Pipe or 3-In. Concentric	2-1/2 one disk	10	NA	NA	NA	NA	NA
			3†	45	40	35	30	25	20
			3† no disk	70	70	70	70	70	70
			4† no disk	70	70	70	70	70	70
2001 to 3000	060-12	2 Pipe or 2 In. Concentric	1-1/2	17	12	7	NA	NA	NA
			2	70	67	66	61	61	61
	080-12 080-16	2 Pipe or 2-In. Concentric	2	49	44	30	25	25	15
			2-1/2	70	70	70	70	70	70
	100-16 100-20	2 Pipe or 3-In. Concentric	2-1/2	35	26	16	16	6	NA
			3	70	70	70	70	66	61
			3	14	9	NA	NA	NA	NA
	120-20	2 Pipe or 3-In. Concentric	3† no disk	70	70	63	56	50	43
			4† no disk	70	70	70	70	70	70
			1-1/2	16	11	6	NA	NA	NA
			2	68	63	62	57	57	56
3001 to 4000	080-12 080-16	2 Pipe or 2-In. Concentric	2	46	41	28	23	22	13
			2-1/2	70	70	70	70	70	70
	100-16 100-20	2 Pipe or 3-In. Concentric	2-1/2	33	24	15	14	5	NA
			3	70	70	70	66	61	56
			3† no disk	65	58	51	44	38	31
	120-20	2 Pipe or 3-In. Concentric	4† no disk	70	70	70	70	70	70
			1-1/2	15	10	5	NA	NA	NA
			2	64	59	58	53	52	52
	080-12 080-16	2 Pipe or 2-In Concentric	2	44	39	26	21	20	11
			2-1/2	70	70	70	70	70	70
4001 to 5000†	100-16 100-20	2 Pipe or 3-In. Concentric	2-1/2	31	22	13	12	NA	NA
			3	70	70	67	62	57	52
			3† no disk	53	46	40	33	26	20
	120-20	2 Pipe or 3-In. Concentric	4† no disk	70	70	70	70	70	70

See notes on pg. 14.

MAXIMUM ALLOWABLE PIPE LENGTH (FT) Continued

ALTITUDE ABOVE SEA LEVEL (FT)	UNIT SIZE	TERMINATION TYPE	PIPE DIA (IN.)*	NUMBER OF 90° ELBOWS					
				1	2	3	4	5	6
5001 to 6000‡	060-12	2 Pipe or 2-In. Concentric	1-1/2	14	9	NA	NA	NA	NA
			2	60	55	54	49	48	47
	080-12 080-16	2 Pipe or 2-In. Concentric	2	41	36	23	18	17	8
			2-1/2	70	70	70	70	70	70
	100-16 100-20	2 Pipe or 3-In Concentric	2-1/2	29	21	12	11	NA	NA
			3	70	67	62	57	52	47
	120-20	2 Pipe or 3-In. Concentric	3† no disk	42	35	29	22	15	9
			4† no disk	70	70	70	70	70	70
6001 to 7000‡	060-12	2 Pipe or 2-In. Concentric	1-1/2	13	8	NA	NA	NA	NA
			2	57	52	50	45	44	43
	080-12 080-16	2 Pipe or 2-In. Concentric	2	38	33	21	16	15	6
			2-1/2	70	70	68	67	66	64
	100-16 100-20	2 Pipe or 3-In. Concentric	2-1/2	27	19	10	9	NA	NA
			3	68	63	58	53	48	43
	120-20	2 Pipe or 3-In. Concentric	3† no disk	31	24	18	11	NA	NA
			4† no disk	70	70	70	70	67	62
7001 to 8000‡	060-12	2 Pipe or 2-In. Concentric	1-1/2	12	7	NA	NA	NA	NA
			2	53	48	46	41	40	38
	080-12 080-16	2 Pipe or 2-In. Concentric	2	36	31	19	14	12	NA
			2 1/2	66	65	63	62	60	59
	100-16 100-20	2 Pipe or 3-In. Concentric	2-1/2	25	17	8	7	NA	NA
			3	63	58	53	48	43	38
	120-20	2 Pipe or 3-In. Concentric	3† no disk	20	13	7	NA	NA	NA
			4† no disk	61	56	51	46	41	36
8001 to 9000‡	060-12	2 Pipe or 2-In. Concentric	1-1/2	11	6	NA	NA	NA	NA
			2	49	44	42	37	35	34
	080-12 080-16	2 Pipe or 2-In. Concentric	2	33	28	17	12	10	NA
			2-1/2	62	60	58	56	55	53
	100-16 100-20	2 Pipe or 3-In. Concentric	2-1/2	23	15	7	5	NA	NA
			3	59	54	49	44	39	34
	120-20	2 Pipe or 3-In. Concentric	3† no disk	10	NA	NA	NA	NA	NA
			4† no disk	35	30	25	20	15	10
9001 to 10,000‡	060-12	2 Pipe or 2-In. Concentric	2	45	40	38	33	31	29
	080-12 080-16	2 Pipe or 2-In. Concentric	2	30	25	14	9	7	NA
			2-1/2	57	55	53	51	49	47
	100-16 100-20	2 Pipe or 3-In. Concentric	2-1/2	21	13	5	NA	NA	NA
			3	54	49	44	39	34	29
	120-20	2 Pipe or 3-In. Concentric	4† no disk	10	5	NA	NA	NA	NA

* Disk usage—Unless otherwise specified, use perforated disk assembly (factory-supplied in loose parts bag). If 1 disk is stated, separate 2 halves of perforated disk assembly and use shouldered disk half. When using shouldered disk half, install screen side toward inlet box.

† Long radius elbow.

‡ Vent sizing for Canadian installations over 4500 ft (1370m) above sea level are subject to acceptance by the local authorities having jurisdiction.

NA — Not Allowed; pressure switch will not make.

NOTES:

1. Do not use pipe size greater than those specified in table or incomplete combustion, flame disturbance, or flame sense lockout may occur.
2. Size both the combustion-air and vent pipe independently determine the smallest diameter allowed by the chart for each pipe, then use the larger of these two diameters for both pipes.
3. Assume two 45° elbows equal one 90° elbow. Long radius elbows are desirable and may be required in some cases.
4. Elbows and pipe sections within the furnace casing and at the vent termination should not be included in vent length or elbow count.
5. The minimum pipe length is 5 ft for all applications.
6. Use 3 in. diameter vent termination kit for installations requiring 4 in. diameter pipe.

**MAXIMUM ALLOWABLE EXPOSED VENT PIPE LENGTH (FT) WITH AND WITHOUT INSULATION
IN WINTER DESIGN TEMPERATURE AMBIENT***

UNIT SIZE	WINTER DESIGN TEMPERATURE (°F)	MAX PIPE DIAMETER (IN.)	WITHOUT INSULATION	WITH 3/8-IN. OR THICKER INSULATION†
060	20	2	44	70
	0	2	21	70
	-20	2	20	57
080	20	2	55	55
	0	2	30	55
	-20	2	16	55
	20	2.5	58	70
	0	2.5	29	70
	-20	2.5	14	67
100	20	2.5	40	40
	0	2.5	38	40
	-20	2.5	21	40
	20	3	63	70
	0	3	30	70
	-20	3	12	70
120	20	3	70	70
	0	3	38	70
	-20	3	19	70
	20	4	65	70
	0	4	26	70
	-20	4	5	65

* Pipe length (ft) specified for maximum pipe lengths located in unconditioned spaces. Pipes located in unconditioned space cannot exceed total allowable pipe length as specified in Table 6.

† Insulation thickness based on R value of 3.5 (ft_ • °F• hr)/(Btu•in.)

Electrical data

UNIT SIZE	060-12	080-12	080-16	100-16	100-20	120-20
UNIT VOLTS — HERTZ — PHASE	115—60—1					
OPERATING VOLTAGE RANGE (Min — Max)*	104—127					
MAXIMUM UNIT AMPS	8.4	8.1	11.6	11.6	13.3	12.9
UNIT AMPACITY†	11.3	10.8	15.3	15.4	17.5	16.8
MINIMUM WIRE SIZE	14	14	12	12	12	12
MAXIMUM WIRE LENGTH (Ft)‡	33	34	37	37	33	34
MAXIMUM FUSE OR CKT BKR (Amps)**	15	15	15	20	20	20
TRANSFORMER (24v)	40va					
EXTERNAL CONTROL POWER AVAILABLE	Heating	19				
	Cooling	35				
AIR CONDITIONING BLOWER RELAY	Standard					


* Permissible limits of the voltage range at which unit will operate satisfactorily.

† Unit ampacity =125% of largest operating component's full load amps plus 100% of all other potential operating components' (EAC, humidifier, etc.) full load amps.



‡ Length is as measured 1 way along wire path between unit and service panel for maximum 2% voltage drop.


** Time-delay type is recommended.

Typical wiring schematic

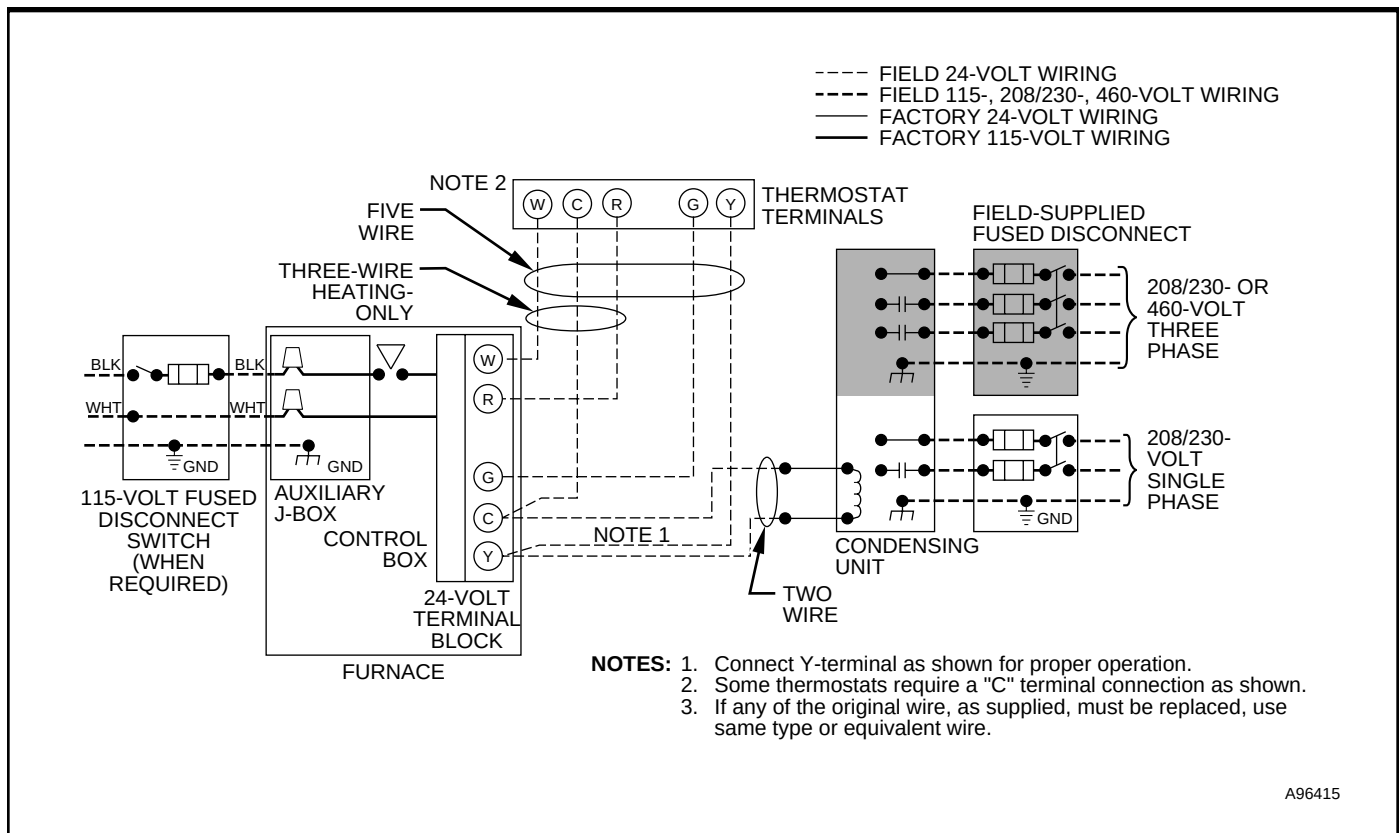


Typical installations

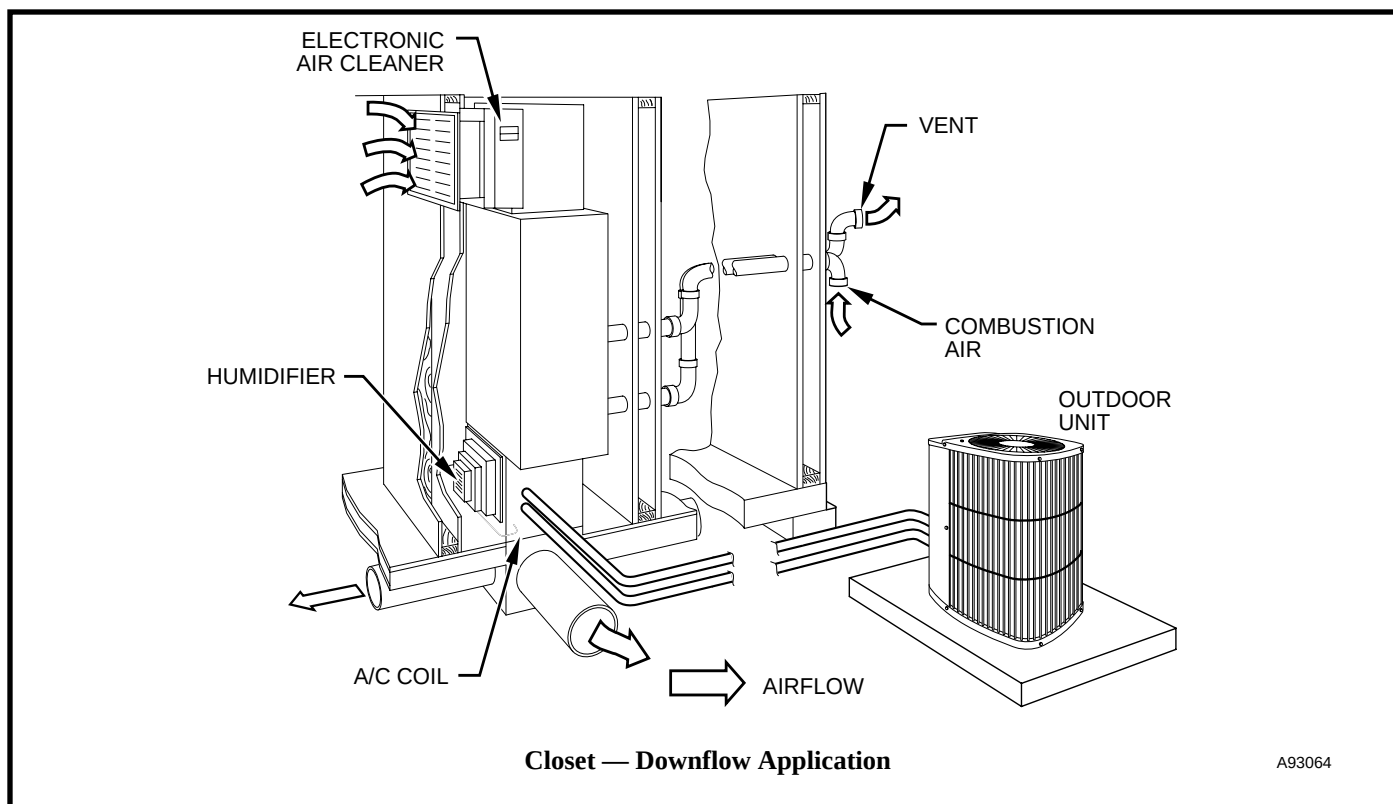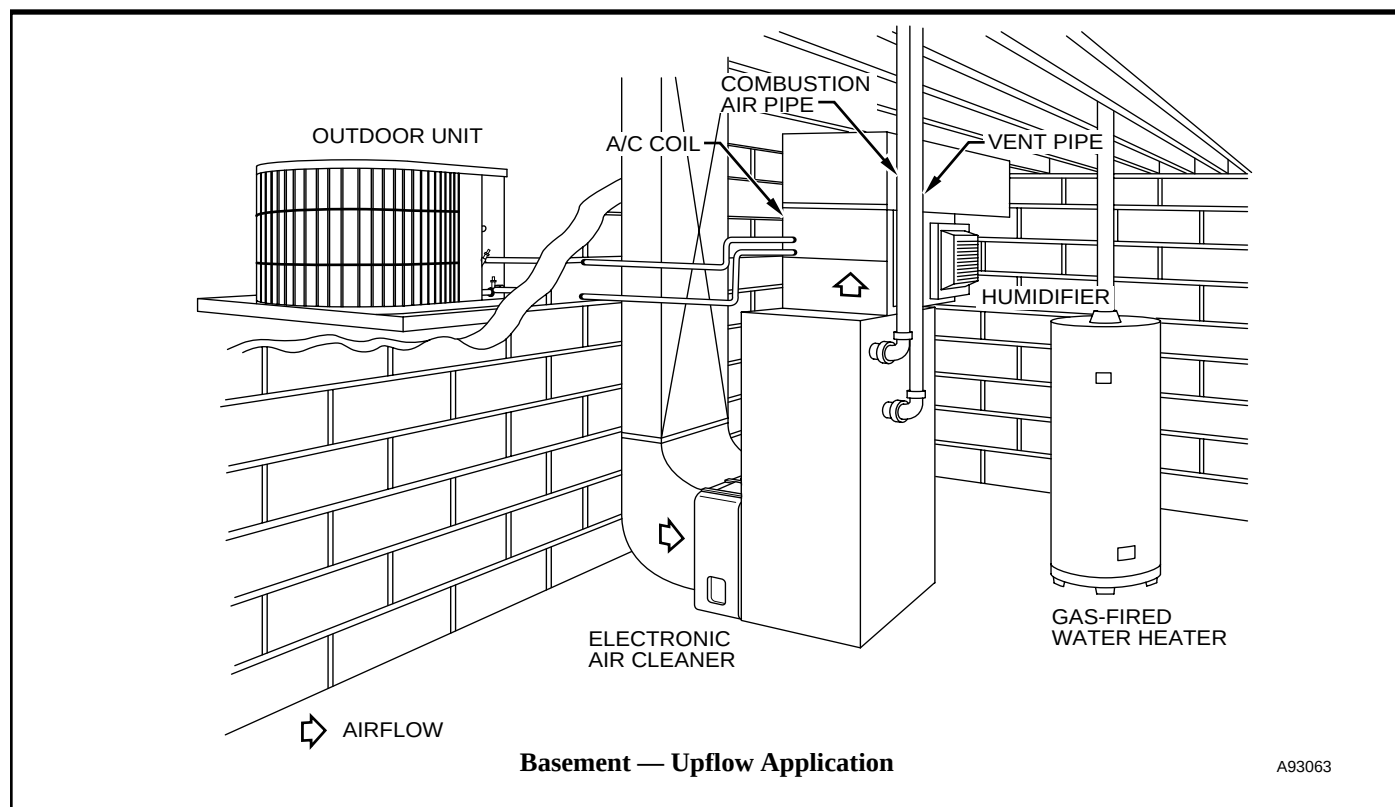

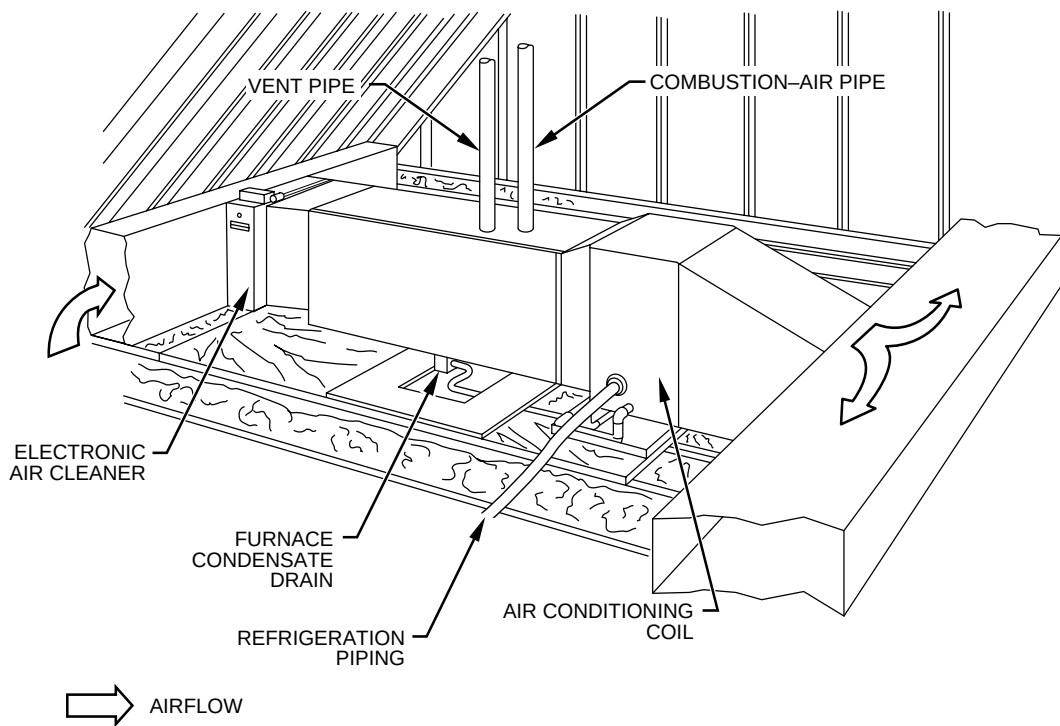

A93065

Attic — Horizontal Application

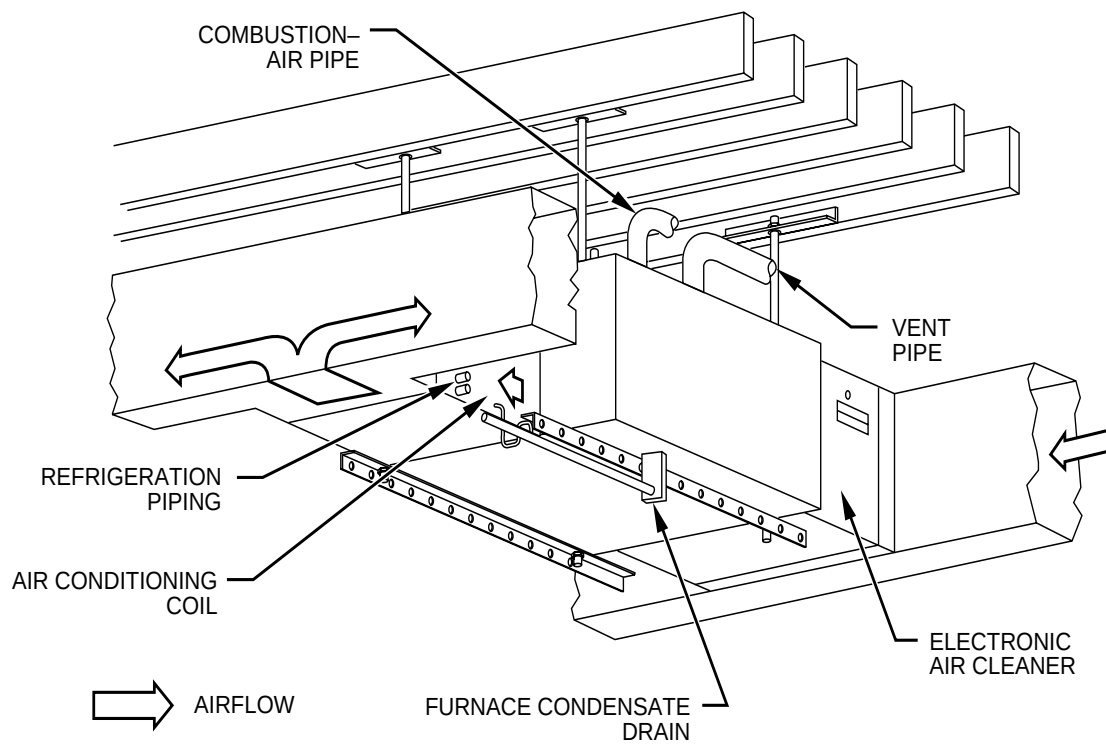

A93066

Crawlspace — Horizontal Application



Carrier

A United Technologies Company

Carrier Corporation • Indianapolis, IN 46231

4-01

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

Book	1	4
Tab	6a	8a

Page 20

Catalog No. 525-80000

Printed in U.S.A.

PC 101

Form 58MTA-1PD
New