

1-Way Cassette Heat Pump Ductless System

Indoor Model: D5FSOAH12XAK

Job Data:

Location:

Tag #:

Carrier#:

Date:




- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Designed to be mounted between 16" joists
 - Four fan speeds
 - Sleep Mode
 - Follow Me (senses temperature at handheld remote)
 - Refrigerant Leak Detection Sensor
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating

RESIDENTIAL APPLICATION LIMITED WARRANTY*

- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

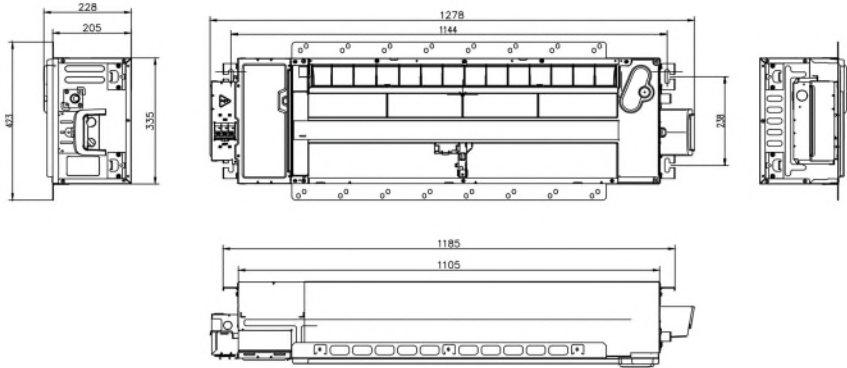

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
6K ~ 18K	mm	1278	335	228
	inch	50.31	13.19	8.98



D5FSOAH12XAK			
System	Indoor Model #		D5FSOAH12XAK
	Indoor Size		12000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Piping	Pipe Connection Size - Liquid	in (mm)	1/4in(6.35mm)
	Pipe Connection Size - Suction	in (mm)	3/8in(9.52mm)
Operating Range	Cooling Indoor DB Min - Max	°F(°C)	60~90(16~32)
	Heating Indoor DB Min - Max	°F(°C)	32~86(0~30)
Indoor Coil	Face Area	Sq. Ft.	2.81
	No. Rows	2	
	Fins per inch	20	
	Circuits	3	
Indoor Unit	Number of Fan Speeds		1075/982/797
	Airflow (highest to lowest)	CFM	311.76/282.35/247.06
	Sound Pressure (highest to lowest)	dB(A)	41/37/33/24
	Moisture Removal	L/h	1.69
	Air Throw Data	ft(m)	22.97(7)
Dimensions	Height	in (mm)	8.98(228)
	Width	in (mm)	50.31(1278)
	Depth	in (mm)	13.19(335)
	Net Weight	lbs (kg)	45.19(20.5)
	Shipping Height	in (mm)	22.64(575)
	Shipping Width	in (mm)	57.60(1463)
	Shipping Depth	in (mm)	22.48(571)
	Shipping Net Weight	lbs (kg)	45.19(20.5)
CONTROLS			
Standard	Wireless Remote Controller (°F/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
	Wired Remote Control with Timer Function	KSACN1201AAA	
	Wi-Fi™ Kit High Wall	KSAIF0701AAA	
	24V Mini Interface	KSAIC0601230	



R-454B