

High Wall Residential Cooling Only System

Indoor Model: 40GVC012---1

Outdoor Model: 38GVC012---1



turn to the experts

Submittal Data

Job Data: _____ Location: _____

Buyer: _____ Buyer P.O. #: _____ Carrier #: _____

Unit Number: _____ Model Number: _____

Performance Data Certified By: _____ Date: _____



Performance
SERIES

High Wall STANDARD FEATURES

- Variable Speed (Inverter)
- Auto Restart
- Modes: Cool, Heat, Dry, Fan, Auto
- 24 Hour Start/Stop Timer
- Louver Control (Fixed or Swing)
- Automatic Air Sweep
- Memory Function
- Sleep Mode

CONTROL FEATURES

- Wireless remote control (standard)

(Unless otherwise indicated, data applies to both indoor and outdoor models)

System	Size	12
	Outdoor Model	38GVC012---1
	Indoor Model	40GVC012---1
Performance	Cooling Rated Capacity Btu/h	11,800
	Cooling Cap. Range Min. - Max Btu/h	3,300 - 12,500
Controls	SEER / EER	16 / 9.4
	Wireless (°C, °F, Convertible)	Standard - Convertible
	Wired (°C, °F, Convertible)	Not Available
Operating Range	Cooling Outdoor Min - Max DB °F	64.4 - 113
	Cooling Indoor DB Min -Max °F	61 - 95
Piping	Total Piping Length ft.	50
	Piping Lift ft.	33
	Pipe Connection Size - Mixed Phase (in)	1/4
	Pipe Connection Size - Vapor (in)	3/8


Electrical	Voltage	115-1-60
	Power Supply	Indoor unit powered from outdoor unit
Outdoor	Outdoor - MCA	15
	Outdoor - Fuse Rating (MOCP)	25
Indoor	Dimensions (W X H X D) In	33.4 x 21.3 x 12.6
	Net Weight (lbs.)	75
Indoor	Sound Pressure dBa	55
	Dimensions (W X H X D) In	30.3 x 11.1 x 7.9
	Net Weight (lbs.)	19.8
	Number of Fan Speeds	4
	Airflow (L / M / H / T) CFM	200 / 235 / 288 / 341

Accessories

Condensate Pump 115V


Insulated 25' Line Set - 1/4" x 3/8"

Construction View Indoor Unit 40GVC012---1

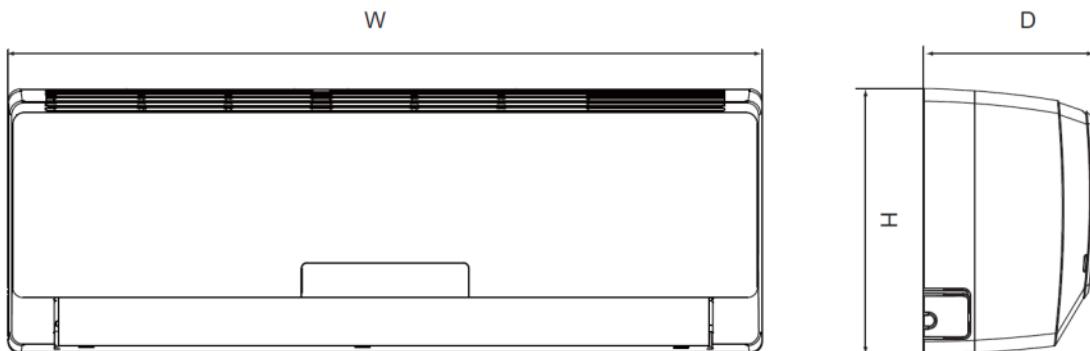

Unit Size	W In. (mm)	H In. (mm)	D In. (mm)	Net Operating Weight Lbs. (Kg)
12 K	30.3 (770)	11.1 (283)	7.9 (201)	19.8 (9.0)

Construction View Outdoor Unit 38GVC012---1

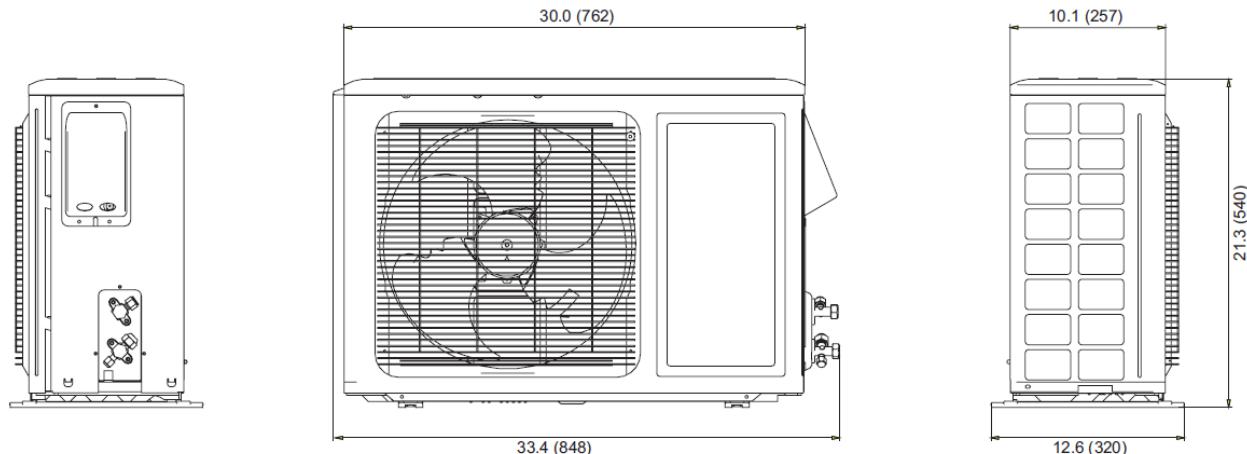

Unit: IN. (mm)

