

**58MCB**


**4-WAY MULTIPOISE FIXED-CAPACITY  
CONDENSING GAS FURNACE**

Input Rates: 40,000 thru 138,000 Btuh



Turn to the Experts.™

## Product Data

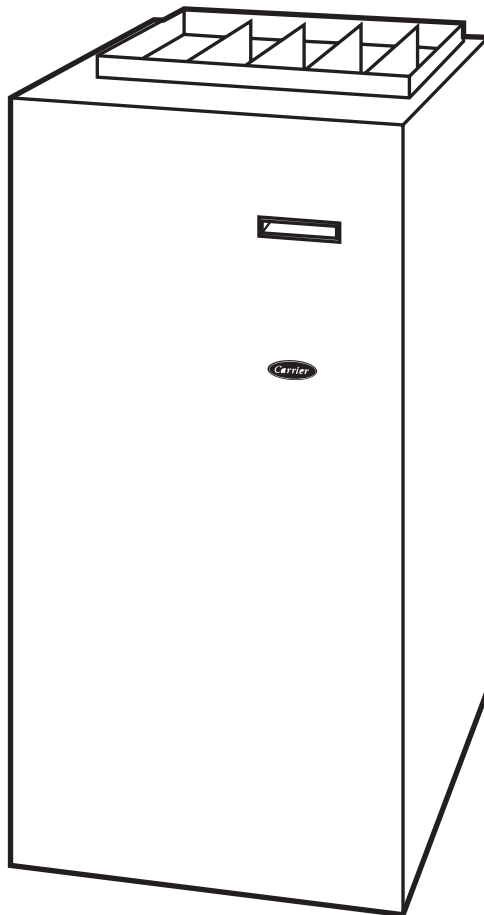

### High Efficiency and Flexibility Designed to Meet the Needs of New Homes

The model 58MCB combines high efficiency with flexibility to meet the changing needs of new home construction. The unique 4-way, multipoise design of the 58MCB allows for installation in upflow, downflow, horizontal left, and horizontal right orientations, meaning it is perfect for a variety of installation applications. With the exception of the 140 size unit, all sizes of the 58MCB can be installed in a manufactured (mobile) home when the optional kit is used and in installations with elevations up to 10,000 ft (140 size unit limitation 7,000 ft). The furnace is factory configured for upflow application but can easily be made ready for downflow or horizontal installation. With the exception of the 140 size, all sizes can be installed with 2-pipe or 1-pipe venting. The 140 size can be installed only as a 2-pipe system.

Horizontal applications offer the advantage of reduced space requirements by locating the furnace in an attic or crawlspace, freeing space formerly dedicated to a furnace or utility room.

The 58MCB is specifically designed to meet the needs of home builders and new home owners. Home builders benefit from the 58MCB's unmatched flexibility and by building a reputation of using quality appliances in homes. Home owners benefit by energy savings from one of the most important home appliances.

The components of the 58MCB represent the finest in the industry. Hot surface ignition (HSI) and a control center provide reliable and efficient ignition. The combustion inducer is unique in that efficient operation is

achieved in any type of installation. Standard 2-in. PVC pipe connects the combustion-air and vent pipes to the furnace. The primary and secondary heat exchangers are backed by a 20-year Limited Warranty.

The 58MCB is a standard part of a quality-built new home. This high-efficiency furnace will provide years of quality service to home builders and home owners alike.

As with other Carrier furnaces, this model is designed to work as a part of the total home comfort system which includes elements for cooling, air cleaning, humidification, ventilation, and zoning.

## 58MCB FEATURES/ BENEFITS

**Serpentuff™**—Exclusive Serpentuff coating, a patented polypropylene laminate is used on the secondary heat exchanger.

**Power Heat™ Igniter**—Carrier's unique SiN igniter is not only physically robust but it is also electrically robust. It is capable of running at line voltage and does not require complex voltage

regulators as do other brands. This unique feature further enhances the reliability of the 58MCB gas furnace and continues Carrier's tradition of technology leadership and innovation in providing a reliable and durable product.

**Control Center**—Controls sequencing and furnace operation. Equipped with a component test feature and status indicator light to assist in troubleshooting. Control times blower start after main burners ignite to eliminate cold air blowing into rooms.

**Warranties**—20-year Limited Warranty on the heat exchangers. Five-year Limited Warranty on entire unit. Contact your dealer for details.

**Direct or Non-direct Venting**—The 58MCB can be installed as a 1 pipe-Non-Direct vent or 2 pipe/Direct vent furnace except the 140 size which can be installed as 2-pipe only. This provides added flexibility to meet diverse installation needs.

**Adjustable Blower Speed**—For precise airflow selection of heating or cooling operation.

**Casing**—One piece, seamless wrap-around construction of prepainted

galvanized steel resists corrosion.



**Combustion Products Venting**—The combustion-air and vent pipes can terminate through a side wall or through the roof when used with a factory-authorized vent termination kit.


**Insulation**—Foil-faced insulation in heat exchanger section of the casing minimizes heat loss.

**Certifications**—The 58MCB units are CSA (A.G.A. and C.G.A.) design certified for use with natural and propane gases. The furnace is factory-shipped for use with natural gas. A CSA (A.G.A./C.G.A.) listed gas conversion kit is required to convert furnace for use with propane gas. The efficiency is GAMA efficiency rating certified. The 58MCB meets California Air Quality Management District emission requirements. Except for the 140 size unit, all sizes of the 58MCB can be installed in a manufactured (mobile) home when the optional kit is used. Refer to Vent Table for elevation limitations.

**Quality Registration**—The 58MCB is engineered and manufactured under an ISO 9001 registered quality system.

## Model number nomenclature

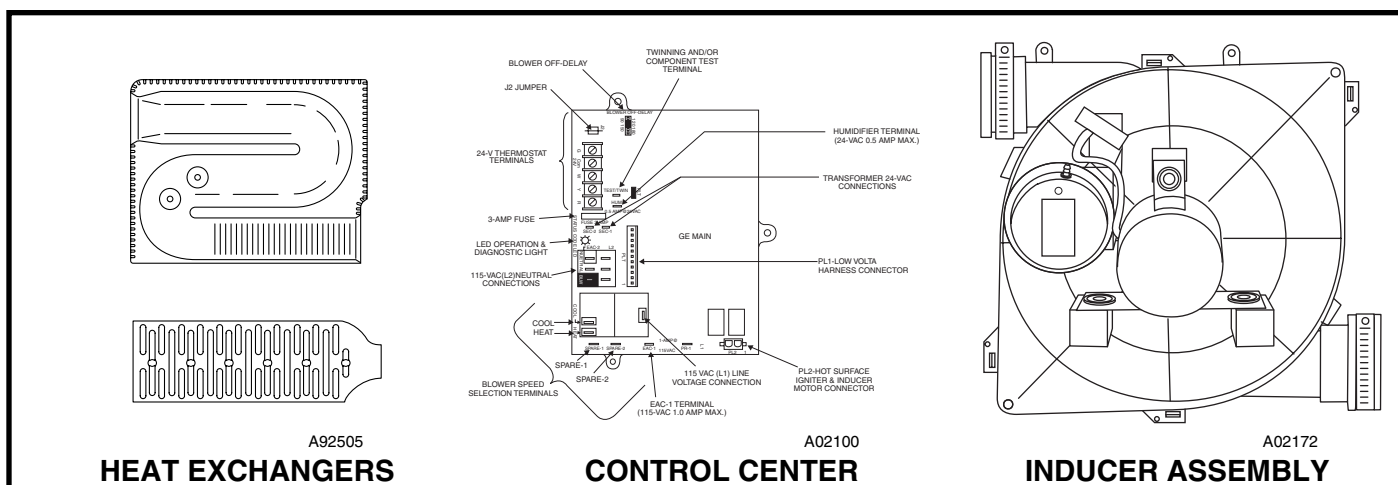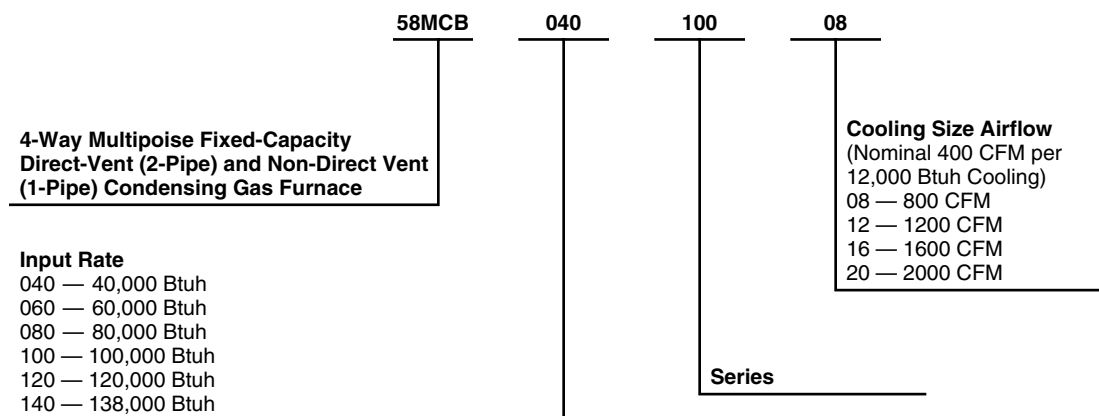

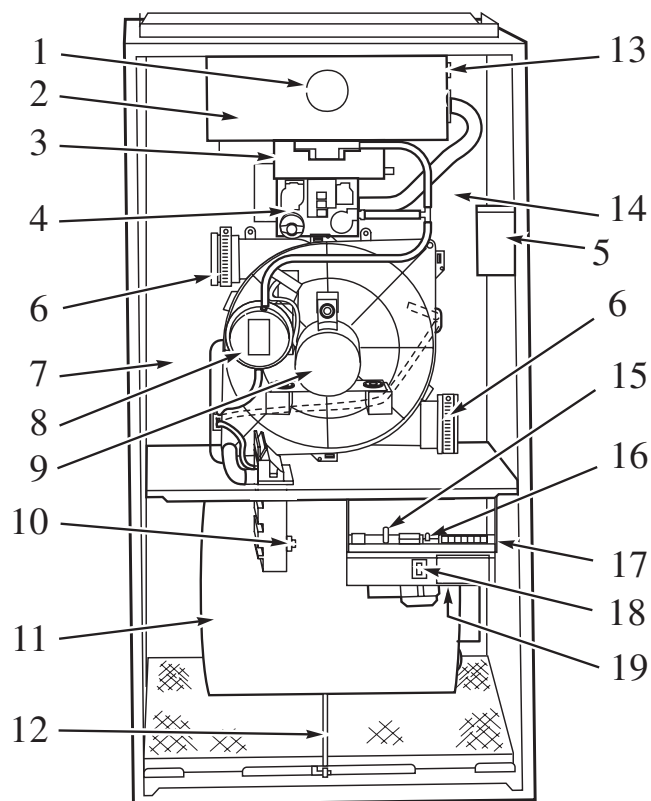

A02173

**NOTES:**

1. The 58MCB Furnaces are for use with natural gas, but can be field-converted for propane gas with a factory-authorized and listed accessory conversion kit.
2. Component location and configuration may be different than shown above.

- |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>1</b> Burner sight glass for viewing burner flame.</p> <p><b>2</b> Burner assembly (inside) operates with energy-saving, inshot burners and hot surface igniter for safe, dependable heating.</p> <p><b>3</b> Combustion-air intake connection to ensure contaminant-free air (right or left side).</p> <p><b>4</b> Redundant gas valve. Safe, efficient, gas control.</p> <p><b>5</b> Junction box for 115-v electrical power supply.</p> <p><b>6</b> Vent outlet uses sealed PVC pipe to carry vent gases from the furnace's combustion system (right or left side).</p> <p><b>7</b> Secondary condensing heat exchanger (inside), wrings out more heat through condensation of gases. Constructed with Polypropylene-laminated steel to ensure durability.</p> <p><b>8</b> Pressure switch ensures adequate flow of flue products through furnace and out vent system.</p> <p><b>9</b> Combustion inducer pulls hot flue gases through the heat exchangers, maintaining negative pressure for added safety.</p> <p><b>10</b> Condensate drain connection collects moisture condensed during the combustion process.</p> | <p><b>11</b> Heavy-duty blower circulates air across the heat exchangers to transfer heat into the home.</p> <p><b>12</b> Air filter and retainer may be used for side or bottom return application.</p> <p><b>13</b> Rollout switch (manual reset) to prevent overtemperature in burner area.</p> <p><b>14</b> Primary serpentine heat exchanger (inside) stretches fuel dollars with the S-shaped heat-flow design. Solid construction of corrosion-resistant aluminized steel means reliability.</p> <p><b>15</b> 3-amp fuse provides electrical and component protection.</p> <p><b>16</b> Light emitting diode (LED) on control center. Code lights are for diagnosing furnace operation and service requirements.</p> <p><b>17</b> Control center.</p> <p><b>18</b> Blower access panel safety interlock switch.</p> <p><b>19</b> Transformer (24v) behind control center provides low-voltage power to furnace control center and thermostat.</p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

# Physical data

| UNIT SIZE                           | 040-08                              | 040-12 | 060-08 | 060-12 | 060-16 | 080-12 | 080-16 | 080-20          | 100-16 | 100-20  | 120-20          | 140-20  |
|-------------------------------------|-------------------------------------|--------|--------|--------|--------|--------|--------|-----------------|--------|---------|-----------------|---------|
| DIRECT-DRIVE MOTOR<br>h.p. (PSC)    | 1/5                                 | 1/3    | 1/5    | 1/3    | 1/2    | 1/3    | 1/2    | 3/4             | 1/2    | 3/4     | 3/4             | 3/4     |
| MOTOR FULL LOAD AMPS                | 4.9                                 | 5.8    | 4.9    | 5.8    | 7.9    | 5.8    | 7.9    | 11.1            | 7.9    | 11.1    | 11.1            | 11.1    |
| RPM (Nominal) — SPEEDS              | 1075—3                              | 1075—4 | 1075—3 | 1075—4 |        |        |        |                 |        |         |                 |         |
| BLOWER WHEEL DIAMETER X WIDTH (In.) | 10 x 6                              | 10 x 7 | 10 x 6 | 10 x 7 | 11 x 8 | 10 x 7 | 11 x 8 | 11 x 10         | 11 x 8 | 11 x 10 | 11 x 10         | 11 x 10 |
| FILTER SIZE (In.) — (Washable)      | (1) 16 x 25 x 1                     |        |        |        |        |        |        | (1) 20 x 25 x 1 |        |         | (1) 24 x 25 x 1 |         |
| SHIPPING WEIGHT (Lb)                | 165                                 | 166    | 172    | 174    | 174    | 188    | 194    | 206             | 219    | 221     | 250             | 250     |
| LIMIT CONTROL                       | SPST                                |        |        |        |        |        |        |                 |        |         |                 |         |
| HEATING BLOWER CONTROL (Off Delay)  | Selectable 90, 120, 150, or 180 sec |        |        |        |        |        |        |                 |        |         |                 |         |
| BURNERS (Monoport)                  | 2                                   | 2      | 3      | 3      | 3      | 4      | 4      | 4               | 5      | 5       | 6               | 6       |
| GAS CONNECTION SIZE                 | 1/2-in. NPT                         |        |        |        |        |        |        |                 |        |         |                 |         |
| GAS VALVE (Redundant) Manufacturer  | White-Rodgers                       |        |        |        |        |        |        |                 |        |         |                 |         |
| Minimum Inlet Pressure (In. wc)     | 4.5 (Natural Gas)                   |        |        |        |        |        |        |                 |        |         |                 |         |
| Maximum Inlet Pressure (In. wc)     | 13.6 (Natural Gas)                  |        |        |        |        |        |        |                 |        |         |                 |         |
| IGNITION DEVICE                     | Hot Surface                         |        |        |        |        |        |        |                 |        |         |                 |         |

PSC—Permanent Split Capacitor

## Carrier accessories\*

| UNIT SIZE                                       | 040-08<br>040-12      | 060-08<br>060-12<br>060-16 | 080-12<br>080-16<br>080-20 | 100-16<br>100-20 | 120-20 | 140-20 |
|-------------------------------------------------|-----------------------|----------------------------|----------------------------|------------------|--------|--------|
| GAS CONVERSION KIT—NATURAL-TO-PROPANE           | KGANP4001ALL          |                            |                            |                  |        |        |
| GAS CONVERSION KIT—PROPANE-TO-NATURAL           | KGAPN3301ALL          |                            |                            |                  |        |        |
| TWINNING KIT†                                   | N/A                   | KGATW0601HSI               |                            |                  |        | N/A    |
| MANUFACTURED (Mobile) HOME KIT                  | KGAMH0102KIT          |                            |                            |                  |        | N/A    |
| DOWNFLOW BASE (For Combustible Floors)‡         | KGASB0201ALL          |                            |                            |                  |        |        |
| VENT TERMINATION KIT (Bracket Only for 2 Pipes) | 2-in.—KGAVT0101BRA    |                            | 3-in.—KGAVT0201BRA         |                  |        |        |
| CONCENTRIC VENT TERMINATION KIT (Single Exit)   | 2-in.—KGAVT0501CVT    |                            | 3-in.—KGAVT0601CVT         |                  |        |        |
| CONDENSTATE FREEZE PROTECTION KIT               | KGAHT0101CFP          |                            |                            |                  |        |        |
| CONDENSATE NEUTRALIZER KIT (obtained thru RCD)  | P908-0001             |                            |                            |                  |        |        |
| SIDE FILTER RACK (Without Filter) Upflow Only   | KGAFR0200ALL          |                            |                            |                  |        |        |
| ELECTRONIC AIR CLEANER (EAC)                    | Model EACB            |                            |                            |                  |        |        |
| MECHANICAL AIR CLEANER                          | Models FILCAB, EZXCAB |                            |                            |                  |        |        |
| HUMIDIFIER                                      | Model HUM             |                            |                            |                  |        |        |
| HEAT RECOVERY VENTILATOR                        | Model HRV             |                            |                            |                  |        |        |
| ENERGY RECOVERY VENTILATOR                      | Model ERV             |                            |                            |                  |        |        |
| UV LIGHTS                                       | Model UVL             |                            |                            |                  |        |        |
| DOOR GASKET KIT                                 | KGBAC0110DGK          |                            |                            |                  |        |        |

\* Factory-authorized and field-installed. Gas conversion kits are A.G.A./C.G.A. recognized.

† For 16 and 20 airflow sizes only (except 140-20 size unit). See kit Installation Instructions for details.

‡ Required for installation on combustible floors when no coil box is used, or when any coil box other than a Carrier cased coil is used.

N/A — Not Applicable

# Thermostat and zoning control options

## NON-PROGRAMMABLE THERMOSTAT SELECTION

|                         |                                                                                                   |
|-------------------------|---------------------------------------------------------------------------------------------------|
| <b>TSTATCCNAC01-C</b>   | For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover                                   |
| <b>TSTATCCNHP01-C*</b>  | For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover                                   |
| <b>TSTATCCN2S01-C*</b>  | For use with 2-spd. Air Conditioner - deg. F/C, Auto Changeover                                   |
| <b>TSTATCCBAC01-B</b>   | For use with 1-spd. Air Conditioner - deg. F/C                                                    |
| <b>TSTATCCPRH01-B**</b> | For multi-use / stage configurations - deg. F/C, Auto Changeover/Temperature and Humidity Control |

\* Model HP and 2S thermostat must be field converted to air conditioner operation.

\*\*Thermidistat Control is versatile and can be configured for multiple use and staging, it must be configured for each specific application.

## PROGRAMMABLE THERMOSTAT SELECTION

|                          |                                                                                                                       |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>TSTATCCPAC01-B</b>    | For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover, 7-Day Programmable                                   |
| <b>TSTATCCPHP01-B*</b>   | For use with 1-spd. Air Conditioner - deg. F/C, Auto Changeover, 7-Day Programmable                                   |
| <b>TSTATCCP2S01-B*</b>   | For use with 2-spd. Air Conditioner - deg. F/C, Auto Changeover, 7-Day Programmable                                   |
| <b>TSTATCCSAC01</b>      | For use with 1-spd. Air Conditioner - deg. F/C, 5-2 Day Programmable                                                  |
| <b>TSTATCCPDF01-B**</b>  | For use with multi-stage applications - deg. F/C, Auto Changeover, 7-Day Programmable                                 |
| <b>TSTATCCPRH01-B***</b> | For multi-use / stage configurations - deg. F/C, Auto Changeover, 7-Day Programmable/Temperature and Humidity Control |

\* Model HP and 2S thermostat must be field converted to air conditioner operation.

\*\*Dual Fuel thermostat is used with furnace and heat pump application

\*\*\*Thermidistat Control can be configured for multiple use and staging, it must be configured for each specific application.

## ZONING CONTROL SELECTION

|                          |                                                               |
|--------------------------|---------------------------------------------------------------|
| <b>ZONECC3Z(AC/HP)01</b> | WeatherMaker Two-Zone kit                                     |
| <b>ZONECC2KIT01-B</b>    | Comfort Zone II-B 2-Zone kit/Temperature and Humidity Control |
| <b>ZONECC4KIT01-B</b>    | Comfort Zone II-B 4-Zone kit/Temperature and Humidity Control |
| <b>ZONECC8KIT01-B</b>    | Comfort Zone II-B 8-Zone kit/Temperature and Humidity Control |



MEETS DOE RESIDENTIAL  
CONSERVATION SERVICES  
PROGRAM STANDARDS.




As an ENERGY STAR Partner, Carrier Corporation has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer.

ISO 9001:2000



**REGISTERED QUALITY SYSTEM**  
These products are engineered and manufactured under an ISO 9001 registered quality system.




A93068

### SIDE FILTER RACK

Custom-made filter rack for easy connection when a return plenum already exists. Provides easy access for cleaning filter.

Accepts one 16 x 25 x 1 in. filter.  
(Not included)

|          |            |
|----------|------------|
| <b>A</b> | 23-1/8 in. |
| <b>B</b> | 2-3/8 in.  |
| <b>C</b> | 14-1/2 in. |




A93086

### CONCENTRIC VENT (Direct Vent/2-Pipe Application)

A concentric vent kit allows vent and combustion-air pipes to terminate through a single exit in a roof or side wall.

One pipe runs inside the other allowing venting through the inner pipe and combustion air to be drawn in through the outer pipe.




A88202

### DOWNFLOW SUBBASE

One base fits all furnace sizes.


The base is designed to be installed between the furnace and a combustible floor when no coil box is used or when a coil box other than a Carrier cased coil is used. It is CSA (A.G.A./C.G.A.) design certified for use with Carrier 58MCB furnaces when installed in downflow.



A96214

### CARRIER CASED N-COIL (as shown)


The Carrier Cased N-Coil or A-Coil is an upflow/downflow furnace coil which can also replace the downflow subbase when installing the 58MCB on combustible flooring in the downflow orientation.



A97380

### ELECTRONIC AIR CLEANER


Cleans the air of smoke, dirt, and many pollens commonly found. Saves decorating and cleaning expenses by keeping carpets, furniture, and drapes cleaner.



A01484

### HUMIDIFIER

By adding moisture to winter-dry air, a Carrier humidifier can often improve comfort and keeps woodwork, wallpaper, and paint in better condition. Moisturizing household air also helps to retain normal body heat and provides comfort at lower temperatures.




A97432

### CONTROLS: THERMOSTATS AND ZONING

Available in programmable and non-programmable models, Carrier thermostats maintain a constant, comfortable temperature level in the home.

For the ultimate in home comfort, Carrier's 2-zone, 4-zone and 8-zone systems allow temperature control of individual "zones" of the home. This is accomplished through a series of electronic dampers and remote room sensors. The 4-zone system is shown.




A94336

### ENERGY/HEAT RECOVERY VENTILATOR

Carrier's energy or heat recovery ventilators exhaust stale indoor air and provide fresh outdoor air to the home while minimizing heat loss and humidity level. Especially useful for today's tighter constructed houses.

Energy recovery ventilator is shown.

## Dimensions

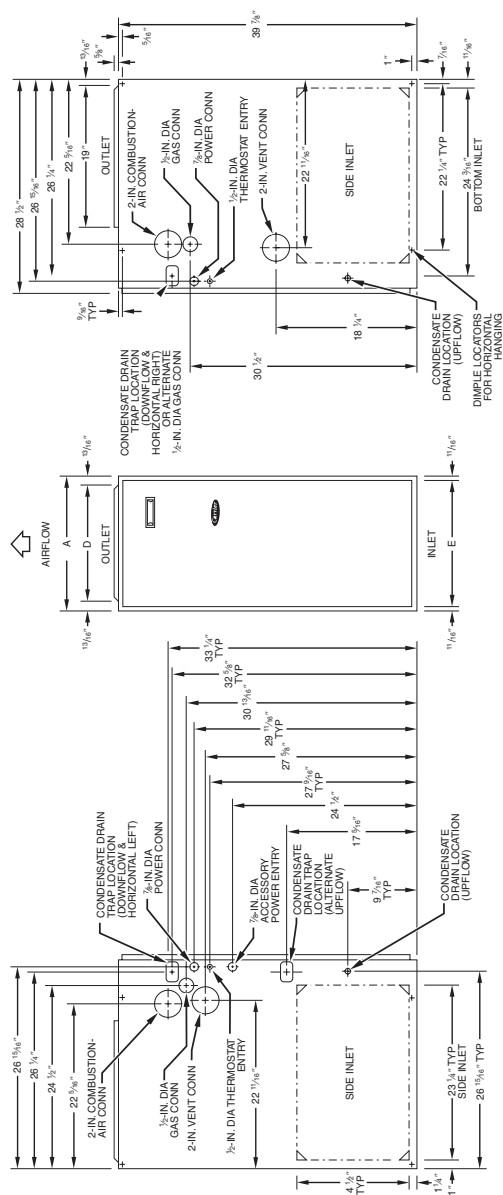

**NOTES:** Minimum return-air opening at furnace, based on metal duct. If flex duct is used, see flex duct manufacturer's recommendation for equivalent diameters:

1. For 800 CFM—16-in. round or 14-1/2 X 12-in. rectangle.
2. For 1200 CFM—20-in. round or 14-1/2 X 19-1/2-in. rectangle.
3. For 1600 CFM—22-in. round or 14-1/2 X 23-1/4-in. rectangle.
4. For airflow requirements above 1800 CFM, see Air Delivery Table in Product Data literature for specific use of single side inlets. The use of both side inlets, a combination of 1 side and the bottom, or the bottom only will ensure adequate return-air openings for airflow requirements above 1800 CFM at 0.51 W.C. ESP.

### DIMENSIONS (In.)


| UNIT SIZE | A      | D      | E      |
|-----------|--------|--------|--------|
| 040-08    | 17-1/2 | 15-7/8 | 16     |
| 040-12    | 17-1/2 | 15-7/8 | 16     |
| 060-08    | 17-1/2 | 15-7/8 | 16     |
| 060-12    | 17-1/2 | 15-7/8 | 16     |
| 060-16    | 17-1/2 | 15-7/8 | 16     |
| 080-12    | 17-1/2 | 15-7/8 | 16     |
| 080-16    | 17-1/2 | 15-7/8 | 16     |
| 080-20    | 21     | 19-3/8 | 19-1/2 |
| 100-16    | 21     | 19-3/8 | 19-1/2 |
| 100-20    | 21     | 19-3/8 | 19-1/2 |
| 120-20    | 24-1/2 | 22-7/8 | 23     |
| 140-20    | 24-1/2 | 22-7/8 | 23     |

A05105

### DOWNFLOW SUBBASE — DIMENSIONS (In.)


| FURNACE CASING WIDTH | FURNACE IN DOWNFLOW APPLICATION                               | PLENUM OPENING* |    | FLOOR OPENING |        | HOLE NO. FOR WIDTH ADJUSTMENT |
|----------------------|---------------------------------------------------------------|-----------------|----|---------------|--------|-------------------------------|
|                      |                                                               | A               | B  | C             | D      |                               |
| 17-1/2               | Furnace with or without Cased Coil Assembly or KCAKC Coil Box | 15-1/8          | 19 | 16-3/4        | 20-3/8 | 3                             |
| 21                   | Furnace with or without Cased Coil Assembly or KCAKC Coil Box | 18-5/8          | 19 | 20-1/4        | 20-3/8 | 2                             |
| 24-1/2               | Furnace with or without Cased Coil Assembly or KCAKC Coil Box | 22-1/8          | 19 | 23-3/4        | 20-3/8 | 1                             |

\* The plenum should be constructed 1/4 in. smaller in width and depth than the plenum dimensions shown above.

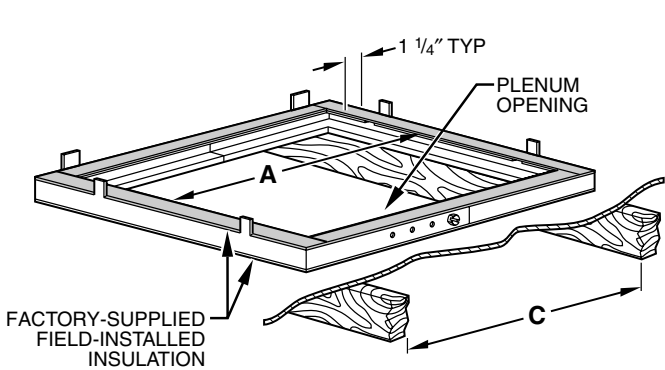

Assembled


A97427

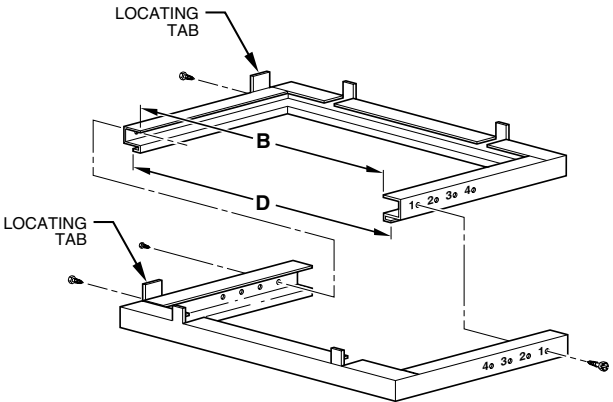

Disassembled

A88207

### Combustion-Air Pipe for Non-Direct Vent (1-Pipe) Application (Sizes 040 through 120 Only)

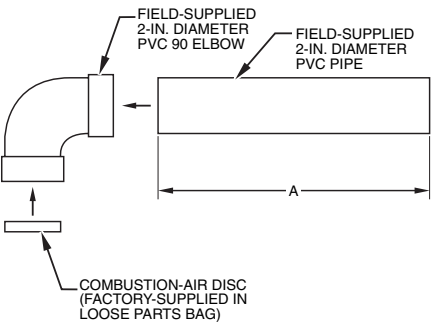


A96211

#### LENGTH OF STRAIGHT PIPE PORTION OF COMBUSTION AIR INLET PIPE ASSEMBLY (IN.)

| CASING WIDTH | A            |
|--------------|--------------|
| 17-1/2       | 8-1/2 ± 1/2  |
| 21           | 10-1/2 ± 1/2 |
| 24-1/2       | 12 ± 1/2     |

## CONCENTRIC VENT for Direct Vent (2-Pipe) Application (All Model Sizes)

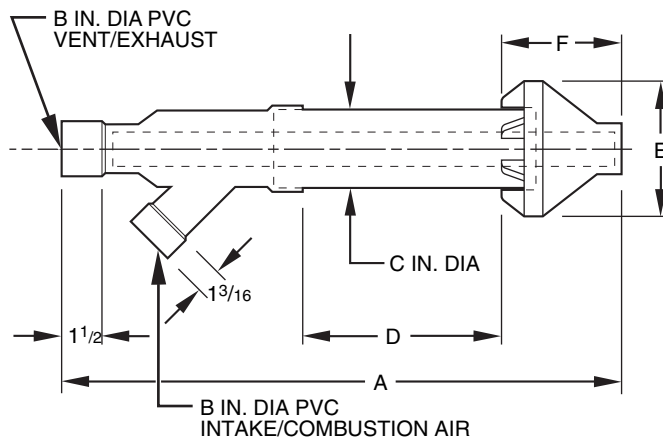

**NOTE:** See furnace Installation Instructions when venting multiple furnaces near each other.

A97110


### DIMENSIONS (In.)

| KIT PART NO. | A*     | B | C     | D†     | E     | F     |
|--------------|--------|---|-------|--------|-------|-------|
| KGAVT0501CVT | 33-3/8 | 2 | 3-1/2 | 16-5/8 | 6-1/4 | 5-3/4 |
| KGAVT0601CVT | 38-7/8 | 3 | 4-1/2 | 21-1/8 | 7-3/8 | 6-1/2 |

\* Dimension A will change accordingly as dimension D is lengthened or shortened.

† Dimension D may be lengthened to 60 in. maximum. Dimension D may also be shortened by cutting the pipes provided in the kit to 12 in. minimum.

## CONDENSATE TRAP

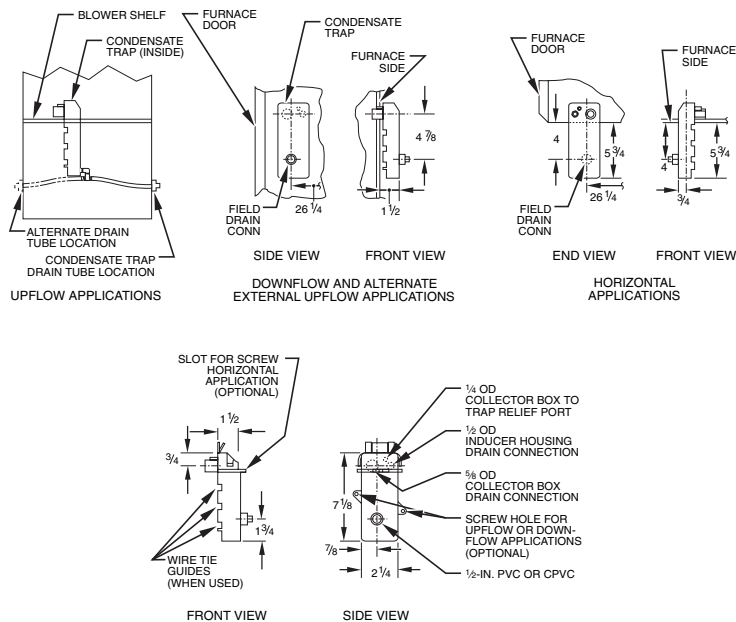

A93026

# Clearance to combustibles

## INSTALLATION

This forced air furnace is equipped for use with natural gas at altitudes 0 - 10,000 ft (0 - 3,050m), except 140 size Furnaces are only approved for altitudes 0 - 7,000 ft. (0 - 2,135m). An accessory kit, supplied by the manufacturer, shall be used to convert to propane gas use or may be required for some natural gas applications.

This furnace is for indoor installation in a building constructed on site. This furnace may be installed in a manufactured (mobile) home when stated on rating plate and using factory authorized kit.

This furnace may be installed on combustible flooring in alcove or closet at minimum clearance from combustible material.

This appliance requires a special venting system. Refer to the installation instructions for parts list and method of installation. This furnace is for use with schedule-40 PVC, PVC-DWV, CPVC, or ABS-DWV pipe, and must not be vented in common with other gas-fired appliances. Construction through which vent/air intake pipes may be installed is maximum 24 inches (600 mm), minimum 3/4 inches (19 mm) thickness (including roofing materials).

Cette fournaise à air pulsé est équipée pour utilisation avec gaz naturel et altitudes comprises entre 0 - 3,050m (0-10,000 pi), excepté queles fournaises de 140 taille sont pour altitudes comprises entre 0 - 2,135m (0 - 7,000 pi).

Utiliser une trousse de conversion, fournie par le fabricant, pour passer au gaz propane ou pour certaines installations au gaz naturel.


Cette fournaise à air pulsé est pour installation à l'intérieur dans un bâtiment construit sur place. Cette fournaise à air pulsé peut être installée dans une maison préfabriquée (maison mobile) si prescrit par la plaque signalétique et si l'on utilise une trousse spécifiée par le fabricant.

Cette fournaise peut être installée sur un plancher combustible dans un enfoncement ou un placard en observant les dégagements minimums avec les matériaux combustibles.

Cet appareil nécessite un système d'évacuation spécial. La méthode d'installation et la liste des pièces nécessaires figurent dans les instructions d'installation. Cette fournaise doit s'utiliser avec la tuyauterie des nomenclatures 40 PVC, PVC-DWV, CPVC, ou ABS-DWV et elle ne peut pas être ventilée conjointment avec d'autres appareils à gaz. Épaisseur de la construction au travers de laquelle il est possible de faire passer les tuyaux d'aération (admission/évacuation): 24 po (600 mm) maximum, 3/4 po (19 mm) minimum (y compris la toiture).


For upflow and downflow applications, furnace must be installed level, or pitched within 1/2" of level. For a horizontal application, the furnace must be pitched minimum 1/4" to maximum of 1/2" forward for proper drainage. See Installation Manual for IMPORTANT unit support details on horizontal applications.

LEVEL (0")  
TO  
1/2" MAX



UPFLOW OR  
DOWNFLOW

MIN 1/4"  
TO  
1/2" MAX



HORIZONTAL

Pour des applications de flux ascendant et descendant, la fournaise doit être installée de niveau ou inclinée à pas plus de 1/2" du niveau. Pour une application horizontale, la fournaise doit être inclinée entre minimum 1/4" et maximum 1/2" du niveau pour le drainage approprié. En cas d'installation en position horizontale, consulter les renseignements IMPORTANTS sur le support dans le manuel d'installation.

### MINIMUM INCHES CLEARANCE TO COMBUSTIBLE CONSTRUCTION

#### ALL POSITIONS:

- \* Minimum front clearance for service 30 inches (762mm).
- †† 140 size furnaces require 1 inch back clearance to combustible materials.

#### DOWNFLOW POSITIONS:

- † For installation on combustible floors only when installed on special base No. KGASB0201ALL, Coil Assembly, Part No. CD5 or CK5, or Coil Casing, Part No. KCAKC.

#### HORIZONTAL POSITIONS:

Line contact is permissible only between lines formed by intersections of top and two sides of furnace jacket, and building joists, studs, or framing.

Clearance shown is for air inlet and air outlet ends.

§ 120 and 140 size furnaces require 1 inch bottom clearance to combustible materials.

### DÉGAGEMENT MINIMUM EN POUCES AVEC ÉLÉMENTS DE CONSTRUCTION COMBUSTIBLES

#### POUR TOUS LES POSITIONS:

- \* Dégagement avant minimum de 762mm (30 po) pour l'entretien.
- †† Pour les fournaises de 140 taille, 1 po (25mm) dégagement des matériaux combustibles est requis au-arrière.

#### POUR LA POSITION COURANT DESCENDANT:

- † Pour l'installation sur le plancher combustible seulement quand on utilise la base spéciale, pièce n° KGASB0201ALL, l'ensemble serpent, pièce n° CD5 ou CK5, ou le carter de serpent, pièce n° KCAKC.

#### POUR LA POSITION HORIZONTALE:


Le contact n'est permis qu'entre les lignes formées par les intersections du dessus et des deux côtés de la chemise de la fournaise, et des solives, des montants ou de la charpente du bâtiment.

§ La distance indiquée concerne l'extrémité du tuyau d'arrivée d'air et l'extrémité du tuyau de sortie d'air.  
Ø Pour les fournaises de 120 et 140 taille, 1 po (25mm) dégagement des matériaux combustibles est requis au-dessous.

This furnace is approved for UPFLOW, DOWNFLOW and HORIZONTAL installations.

Cette fournaise est approuvée pour l'installation HORIZONTALE et la circulation d'air VERS LE HAUT et VERS LE BAS.

Clearance arrows do not change with furnace orientation.

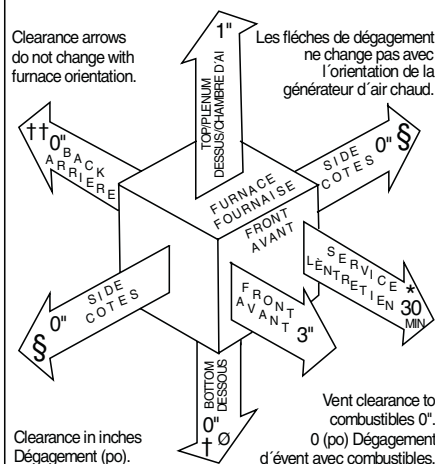

Les flèches de dégagement ne change pas avec l'orientation de la fournaise.

Clearance in inches  
Dégagement (po).

Vent clearance to combustibles 0".  
0 (po) Dégagement d'évent avec combustibles.

324999-201 REV. D (LIT TOP)

**AIR DELIVERY—CFM (With Filter)\***

| UNIT SIZE | RETURN-AIR SUPPLY               | SPEED    | EXTERNAL STATIC PRESSURE (In. wc) |      |      |      |      |      |      |      |
|-----------|---------------------------------|----------|-----------------------------------|------|------|------|------|------|------|------|
|           |                                 |          | 0.1                               | 0.2  | 0.3  | 0.4  | 0.5  | 0.6  | 0.7  | 0.8  |
| 040-08    | 1 side or bottom                | High     | 1075                              | 1040 | 995  | 945  | 895  | 840  | 760  | 670  |
|           |                                 | Med-High | 850                               | 825  | 780  | 740  | 685  | 635  | 560  | 480  |
|           |                                 | Med-Low  | 740                               | 700  | 650  | 620  | 565  | 515  | 455  | 385  |
| 040-12    | 1 side or bottom                | High     | 1470                              | 1415 | 1400 | 1285 | 1215 | 1120 | 995  | 890  |
|           |                                 | Med-High | 1315                              | 1280 | 1235 | 1180 | 1115 | 1035 | 930  | 825  |
|           |                                 | Med-Low  | 1125                              | 1110 | 1085 | 1045 | 990  | 915  | 830  | 740  |
| 060-08    | 1 side or bottom                | High     | 1100                              | 1065 | 1005 | 945  | 900  | 805  | 730  | 610  |
|           |                                 | Med-High | 890                               | 865  | 810  | 765  | 705  | 620  | 540  | 475  |
|           |                                 | Med-Low  | 745                               | 710  | 670  | 625  | 565  | 505  | 425  | 360  |
| 060-12    | 1 side or bottom                | High     | 1430                              | 1375 | 1325 | 1275 | 1200 | 1135 | 1040 | 935  |
|           |                                 | Med-High | 1270                              | 1260 | 1215 | 1160 | 1105 | 1035 | 950  | 850  |
|           |                                 | Med-Low  | 1070                              | 1055 | 1045 | 1015 | 975  | 920  | 850  | 750  |
| 060-16    | 1 side or bottom                | High     | 1700                              | 1695 | 1640 | 1580 | 1545 | 1450 | 1380 | 1310 |
|           |                                 | Med-High | 1500                              | 1465 | 1435 | 1385 | 1355 | 1300 | 1250 | 1185 |
|           |                                 | Med-Low  | 1325                              | 1295 | 1265 | 1230 | 1190 | 1150 | 1105 | 1050 |
| 080-12    | 1 side or bottom                | High     | 1535                              | 1470 | 1405 | 1330 | 1245 | 1160 | 1065 | 935  |
|           |                                 | Med-High | 1395                              | 1350 | 1300 | 1225 | 1155 | 1080 | 985  | 880  |
|           |                                 | Med-Low  | 1200                              | 1175 | 1125 | 1065 | 1030 | 970  | 890  | 780  |
| 080-16    | 1 side or bottom                | High     | 1750                              | 1685 | 1635 | 1575 | 1525 | 1445 | 1380 | 1310 |
|           |                                 | Med-High | 1495                              | 1455 | 1405 | 1355 | 1305 | 1250 | 1185 | 1120 |
|           |                                 | Med-Low  | 1310                              | 1260 | 1225 | 1170 | 1125 | 1095 | 1040 | 980  |
| 080-20    | 1 side or bottom                | High     | 2200                              | 2175 | 2085 | 2025 | 1925 | 1820 | 1735 | 1635 |
|           |                                 | Med-High | 2100                              | 2025 | 1945 | 1865 | 1785 | 1700 | 1620 | 1540 |
|           |                                 | Med-Low  | 1815                              | 1760 | 1720 | 1670 | 1620 | 1550 | 1480 | 1405 |
| 100-16    | 1 side or bottom                | High     | 1740                              | 1705 | 1660 | 1615 | 1570 | 1500 | 1425 | 1355 |
|           |                                 | Med-High | 1500                              | 1470 | 1445 | 1410 | 1375 | 1330 | 1280 | 1210 |
|           |                                 | Med-Low  | 1340                              | 1315 | 1300 | 1270 | 1235 | 1200 | 1140 | 1095 |
| 100-20    | 1 side or bottom                | High     | 2250                              | 2175 | 2090 | 2020 | 1930 | 1855 | 1760 | 1670 |
|           |                                 | Med-High | 2020                              | 1950 | 1900 | 1840 | 1790 | 1710 | 1640 | 1545 |
|           |                                 | Med-Low  | 1725                              | 1690 | 1660 | 1630 | 1575 | 1520 | 1460 | 1370 |
| 120-20    | bottom only                     | High     | 2350                              | 2250 | 2160 | 2070 | 2000 | 1885 | 1790 | 1635 |
|           |                                 | Med-High | 2100                              | 2015 | 1955 | 1875 | 1810 | 1710 | 1650 | 1540 |
|           |                                 | Med-Low  | 1770                              | 1720 | 1675 | 1620 | 1575 | 1515 | 1450 | 1365 |
| 140-20    | both sides or 1 side and bottom | High     | 2435                              | 2360 | 2285 | 2220 | 2130 | 2050 | 1965 | 1875 |
|           |                                 | Med-High | 2040                              | 2000 | 1950 | 1905 | 1835 | 1790 | 1725 | 1650 |
|           |                                 | High     | 2255                              | 2190 | 2115 | 2045 | 1965 | 1890 | 1800 | 1710 |
| 140-20    | 1 side only                     | Med-High | 1985                              | 1930 | 1890 | 1840 | 1780 | 1720 | 1645 | 1560 |
|           | bottom only                     | High     | 2285                              | 2210 | 2140 | 2065 | 1990 | 1910 | 1830 | 1745 |
|           |                                 | Med-High | 2020                              | 1970 | 1920 | 1870 | 1805 | 1730 | 1660 | 1590 |
| 140-20    | both sides or 1 side and bottom | Med-Low  | 1675                              | 1650 | 1620 | 1590 | 1560 | 1510 | 1450 | 1390 |
|           |                                 | High     | 2310                              | 2255 | 2185 | 2120 | 2045 | 1965 | 1880 | 1800 |
|           |                                 | Med-High | 1975                              | 1945 | 1900 | 1860 | 1835 | 1775 | 1720 | 1640 |
| 140-20    | 1 side only                     | High     | 2140                              | 2080 | 2025 | 1945 | 1875 | 1795 | 1725 | 1625 |
|           |                                 | Med-High | 1930                              | 1850 | 1800 | 1740 | 1725 | 1660 | 1580 | 1495 |

\* A filter is required for each return-air supply.

- For horizontal and downflow applications, use "1 side or bottom" or "bottom only" as airflow reference.

# Combustion-air and vent piping for Direct Vent/2-Pipe (All Sizes) and Non-Direct Vent/1-Pipe (Sizes 040 through 120 Only) Applications

58MCB

| ALTITUDE (FT) | UNIT SIZE (BTUH) | DIRECT VENT (2-PIPE) ONLY  |                 | NON-DIRECT VENT (1-PIPE) ONLY | NUMBER OF 90° ELBOWS |    |    |    |    |    |
|---------------|------------------|----------------------------|-----------------|-------------------------------|----------------------|----|----|----|----|----|
|               |                  | TERMINATION TYPE           | PIPE DIA (IN.)* |                               | 1                    | 2  | 3  | 4  | 5  | 6  |
| 0 to 2000     | 40,000           | 2 Pipe or 2-in Concentric  | 1               | 1                             | 5                    | NA | NA | NA | NA | NA |
|               |                  |                            | 1-1/2           | 1-1/2                         | 70                   | 70 | 65 | 60 | 60 | 55 |
|               |                  |                            | 2               | 2                             | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 60,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 20                   | 15 | 10 | 5  | NA | NA |
|               |                  |                            | 2               | 2                             | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 80,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 10                   | NA | NA | NA | NA | NA |
|               |                  |                            | 2               | 2                             | 55                   | 50 | 35 | 30 | 30 | 20 |
|               |                  |                            | 2-1/2           | 2-1/2                         | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 100,000          | 2 Pipe or 3-in Concentric  | 2               | 2                             | 5                    | NA | NA | NA | NA | NA |
|               |                  |                            | 2-1/2           | 2-1/2                         | 40                   | 30 | 20 | 20 | 10 | NA |
|               |                  |                            | 3               | 3                             | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 120,000          | 2 Pipe or 3-in. Concentric | 2-1/2 one disk  | 2-1/2                         | 10                   | NA | NA | NA | NA | NA |
|               |                  |                            | 3†              | NA                            | 45                   | 40 | 35 | 30 | 25 | 20 |
|               |                  |                            | 3† no disk      | 3†                            | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 140,000          | 2 Pipe or 3-in. Concentric | 2-1/2 one disk  | NA                            | 5                    | NA | NA | NA | NA | NA |
|               |                  |                            | 3† one disk     | NA                            | 40                   | 35 | 30 | 25 | 20 | 15 |
|               |                  |                            | 3† no disk      | NA                            | 60                   | 56 | 52 | 48 | 44 | 40 |
|               |                  |                            | 4† no disk      | NA                            | 70                   | 70 | 70 | 70 | 70 | 70 |
| ALTITUDE (FT) | UNIT SIZE (BTUH) | DIRECT VENT (2-PIPE) ONLY  |                 | NON-DIRECT VENT (1-PIPE) ONLY | NUMBER OF 90° ELBOWS |    |    |    |    |    |
|               |                  | TERMINATION TYPE           | PIPE DIA (IN.)* |                               | 1                    | 2  | 3  | 4  | 5  | 6  |
| 2001 to 3000  | 40,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 67                   | 62 | 57 | 52 | 52 | 47 |
|               |                  |                            | 2               | 2                             | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 60,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 17                   | 12 | 7  | NA | NA | NA |
|               |                  |                            | 2               | 2                             | 70                   | 67 | 66 | 61 | 61 | 61 |
|               | 80,000           | 2 Pipe or 2-in Concentric  | 2               | 2                             | 49                   | 44 | 30 | 25 | 25 | 15 |
|               |                  |                            | 2-1/2           | 2-1/2                         | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 100,000          | 2 Pipe or 3-in Concentric  | 2-1/2           | 2-1/2                         | 35                   | 26 | 16 | 16 | 6  | NA |
|               |                  |                            | 3               | 3                             | 70                   | 70 | 70 | 70 | 66 | 61 |
|               | 120,000          | 2 Pipe or 3-in. Concentric | 3               | NA                            | 14                   | 9  | NA | NA | NA | NA |
|               |                  |                            | NA              | 3†                            | 63                   | 62 | 62 | 61 | 61 | 61 |
|               |                  |                            | 3† no disk      | NA                            | 70                   | 70 | 63 | 56 | 50 | 43 |
|               |                  |                            | 4† no disk      | 4† no disk                    | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 140,000          | 2 Pipe or 3-in. Concentric | 3† one disk     | NA                            | 20                   | 15 | 10 | 5  | NA | NA |
|               |                  |                            | 3† no disk      | NA                            | 39                   | 35 | 31 | 27 | 23 | 19 |
|               |                  |                            | 4† no disk      | NA                            | 70                   | 70 | 70 | 70 | 70 | 70 |
| ALTITUDE (FT) | UNIT SIZE (BTUH) | DIRECT VENT (2-PIPE) ONLY  |                 | NON-DIRECT VENT (1-PIPE) ONLY | NUMBER OF 90° ELBOWS |    |    |    |    |    |
|               |                  | TERMINATION TYPE           | PIPE DIA (IN.)* |                               | 1                    | 2  | 3  | 4  | 5  | 6  |
| 3001 to 4000  | 40,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 64                   | 59 | 54 | 49 | 48 | 43 |
|               |                  |                            | 2               | 2                             | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 60,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 16                   | 11 | 6  | NA | NA | NA |
|               |                  |                            | 2               | 2                             | 68                   | 63 | 62 | 57 | 57 | 56 |
|               | 80,000           | 2 Pipe or 2-in Concentric  | 2               | 2                             | 46                   | 41 | 28 | 23 | 22 | 13 |
|               |                  |                            | 2-1/2           | 2-1/2                         | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 100,000          | 2 Pipe or 3-in Concentric  | 2-1/2           | 2-1/2                         | 33                   | 24 | 15 | 14 | 5  | NA |
|               |                  |                            | 3               | 3                             | 70                   | 70 | 70 | 66 | 61 | 56 |
|               | 120,000          | 2 Pipe or 3-in. Concentric | 3† no disk      | NA                            | 65                   | 58 | 51 | 44 | 38 | 31 |
|               |                  |                            | NA              | 3†                            | 59                   | 59 | 58 | 57 | 57 | 56 |
|               |                  |                            | 4† no disk      | 4† no disk                    | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 140,000          | 2 Pipe or 3-in. Concentric | 3† one disk     | NA                            | 11                   | 6  | NA | NA | NA | NA |
|               |                  |                            | 3† no disk      | NA                            | 30                   | 26 | 22 | 18 | 14 | 10 |
|               |                  |                            | 4† no disk      | NA                            | 70                   | 70 | 70 | 70 | 70 | 70 |

See notes at end of table

# Combustion-air and vent piping for Direct Vent/2-Pipe (All Sizes) and Non-Direct Vent/1-Pipe (Sizes 040 through 120 Only) Applications

| ALTITUDE (FT) | UNIT SIZE (BTUH) | DIRECT VENT (2-PIPE) ONLY  |                 | NON-DIRECT VENT (1-PIPE) ONLY | NUMBER OF 90° ELBOWS |    |    |    |    |    |
|---------------|------------------|----------------------------|-----------------|-------------------------------|----------------------|----|----|----|----|----|
|               |                  | TERMINATION TYPE           | PIPE DIA (IN.)* | PIPE DIA (IN.)*               | 1                    | 2  | 3  | 4  | 5  | 6  |
| 4001 to 5000‡ | 40,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 60                   | 55 | 50 | 45 | 44 | 39 |
|               |                  |                            | 2               | 2                             | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 60,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 15                   | 10 | 5  | NA | NA | NA |
|               |                  |                            | 2               | 2                             | 64                   | 59 | 58 | 53 | 52 | 52 |
|               | 80,000           | 2 Pipe or 2-in Concentric  | 2               | 2                             | 44                   | 39 | 26 | 21 | 20 | 11 |
|               |                  |                            | 2-1/2           | 2-1/2                         | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 100,000          | 2 Pipe or 3-in Concentric  | 2-1/2           | 2-1/2                         | 31                   | 22 | 13 | 12 | NA | NA |
|               |                  |                            | 3               | 3                             | 70                   | 70 | 67 | 62 | 57 | 52 |
|               | 120,000          | 2 Pipe or 3-in. Concentric | 3† no disk      | NA                            | 53                   | 46 | 40 | 33 | 26 | 20 |
|               |                  |                            | NA              | 3†                            | 56                   | 55 | 54 | 53 | 52 | 52 |
|               |                  |                            | 4† no disk      | 4† no disk                    | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 140,000          | 2 Pipe or 3-in. Concentric | 3† no disk      | NA                            | 21                   | 17 | 13 | 9  | 5  | NA |
|               |                  |                            | 4† no disk      | NA                            | 69                   | 64 | 59 | 54 | 49 | 44 |
| ALTITUDE (FT) | UNIT SIZE (BTUH) | DIRECT VENT (2-PIPE) ONLY  |                 | NON-DIRECT VENT (1-PIPE) ONLY | NUMBER OF 90° ELBOWS |    |    |    |    |    |
|               |                  | TERMINATION TYPE           | PIPE DIA (IN.)* | PIPE DIA (IN.)*               | 1                    | 2  | 3  | 4  | 5  | 6  |
| 5001 to 6000‡ | 40,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 57                   | 52 | 47 | 42 | 40 | 35 |
|               |                  |                            | 2               | 2                             | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 60,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 14                   | 9  | NA | NA | NA | NA |
|               |                  |                            | 2               | 2                             | 60                   | 55 | 54 | 49 | 48 | 47 |
|               | 80,000           | 2 Pipe or 2-in Concentric  | 2               | 2                             | 41                   | 36 | 23 | 18 | 17 | 8  |
|               |                  |                            | 2-1/2           | 2-1/2                         | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 100,000          | 2 Pipe or 3-in Concentric  | 2-1/2           | 2-1/2                         | 29                   | 21 | 12 | 11 | NA | NA |
|               |                  |                            | 3               | 3                             | 70                   | 67 | 62 | 57 | 52 | 47 |
|               | 120,000          | 2 Pipe or 3-in. Concentric | 3† no disk      | NA                            | 42                   | 35 | 29 | 22 | 15 | 9  |
|               |                  |                            | NA              | 3†                            | 53                   | 52 | 50 | 49 | 48 | 47 |
|               |                  |                            | 4† no disk      | 4† no disk                    | 70                   | 70 | 70 | 70 | 70 | 70 |
|               | 140,000          | 2 Pipe or 3-in. Concentric | 3† no disk      | NA                            | 12                   | 8  | NA | NA | NA | NA |
|               |                  |                            | 4† no disk      | NA                            | 42                   | 37 | 32 | 27 | 22 | 17 |
| ALTITUDE (FT) | UNIT SIZE (BTUH) | DIRECT VENT (2-PIPE) ONLY  |                 | NON-DIRECT VENT (1-PIPE) ONLY | NUMBER OF 90° ELBOWS |    |    |    |    |    |
|               |                  | TERMINATION TYPE           | PIPE DIA (IN.)* | PIPE DIA (IN.)*               | 1                    | 2  | 3  | 4  | 5  | 6  |
| 6001 to 7000‡ | 40,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 53                   | 48 | 43 | 38 | 37 | 32 |
|               |                  |                            | 2               | 2                             | 70                   | 70 | 68 | 67 | 66 | 64 |
|               | 60,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 13                   | 8  | NA | NA | NA | NA |
|               |                  |                            | 2               | 2                             | 57                   | 52 | 50 | 45 | 44 | 43 |
|               | 80,000           | 2 Pipe or 2-in Concentric  | 2               | 2                             | 38                   | 33 | 21 | 16 | 15 | 6  |
|               |                  |                            | 2-1/2           | 2-1/2                         | 70                   | 70 | 68 | 67 | 66 | 64 |
|               | 100,000          | 2 Pipe or 3-in Concentric  | 2-1/2           | 2-1/2                         | 27                   | 19 | 10 | 9  | NA | NA |
|               |                  |                            | 3               | 3                             | 68                   | 63 | 58 | 53 | 48 | 43 |
|               | 120,000          | 2 Pipe or 3-in. Concentric | 3† no disk      | NA                            | 31                   | 24 | 18 | 11 | NA | NA |
|               |                  |                            | NA              | 3†                            | 49                   | 48 | 47 | 45 | 44 | 43 |
|               |                  |                            | 4† no disk      | 4† no disk                    | 70                   | 70 | 70 | 70 | 67 | 62 |
|               | 140,000          | 2 Pipe or 3-in. Concentric | 4† no disk      | NA                            | 17                   | 12 | 7  | NA | NA | NA |

See notes at end of table

# Combustion-air and vent piping for Direct Vent/2-Pipe (All Sizes) and Non-Direct Vent/1-Pipe (Sizes 040 through 120 Only) Applications

58MCB

| ALTITUDE (FT)   | UNIT SIZE (BTUH) | DIRECT VENT (2-PIPE) ONLY  |                 | NON-DIRECT VENT (1-PIPE) ONLY | NUMBER OF 90° ELBOWS |    |    |    |    |    |
|-----------------|------------------|----------------------------|-----------------|-------------------------------|----------------------|----|----|----|----|----|
|                 |                  | TERMINATION TYPE           | PIPE DIA (IN.)* | PIPE DIA (IN.)*               | 1                    | 2  | 3  | 4  | 5  | 6  |
| 7001 to 8000‡   | 40,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 49                   | 44 | 39 | 34 | 33 | 28 |
|                 |                  |                            | 2               | 2                             | 66                   | 65 | 63 | 62 | 60 | 59 |
|                 | 60,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 12                   | 7  | NA | NA | NA | NA |
|                 |                  |                            | 2               | 2                             | 53                   | 48 | 46 | 41 | 40 | 38 |
|                 | 80,000           | 2 Pipe or 2-in Concentric  | 2               | 2                             | 36                   | 31 | 19 | 14 | 12 | NA |
|                 |                  |                            | 2-1/2           | 2-1/2                         | 66                   | 65 | 63 | 62 | 60 | 59 |
|                 | 100,000          | 2 Pipe or 3-in Concentric  | 2-1/2           | 2-1/2                         | 25                   | 17 | 8  | 7  | NA | NA |
|                 |                  |                            | 3               | 3                             | 63                   | 58 | 53 | 48 | 43 | 38 |
|                 | 120,000          | 2 Pipe or 3-in. Concentric | 3† no disk      | NA                            | 20                   | 13 | 7  | NA | NA | NA |
|                 |                  |                            | NA              | 3†                            | 46                   | 44 | 43 | 41 | 40 | 38 |
|                 |                  |                            | 4† no disk      | 4† no disk                    | 61                   | 56 | 51 | 46 | 41 | 36 |
|                 | 140,000          | NA                         |                 |                               |                      |    |    |    |    |    |
| ALTITUDE (FT)   | UNIT SIZE (BTUH) | DIRECT VENT (2-PIPE) ONLY  |                 | NON-DIRECT VENT (1-PIPE) ONLY | NUMBER OF 90° ELBOWS |    |    |    |    |    |
|                 |                  | TERMINATION TYPE           | PIPE DIA (IN.)* | PIPE DIA (IN.)*               | 1                    | 2  | 3  | 4  | 5  | 6  |
| 8001 to 9000‡   | 40,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 46                   | 41 | 36 | 31 | 29 | 24 |
|                 |                  |                            | 2               | 2                             | 62                   | 60 | 58 | 56 | 55 | 53 |
|                 | 60,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 11                   | 6  | NA | NA | NA | NA |
|                 |                  |                            | 2               | 2                             | 49                   | 44 | 42 | 37 | 35 | 34 |
|                 | 80,000           | 2 Pipe or 2-in Concentric  | 2               | 2                             | 33                   | 28 | 17 | 12 | 10 | NA |
|                 |                  |                            | 2-1/2           | 2-1/2                         | 62                   | 60 | 58 | 56 | 55 | 53 |
|                 | 100,000          | 2 Pipe or 3-in Concentric  | 2-1/2           | 2-1/2                         | 23                   | 15 | 7  | 5  | NA | NA |
|                 |                  |                            | 3               | 3                             | 59                   | 54 | 49 | 44 | 39 | 34 |
|                 | 120,000          | 2 Pipe or 3-in. Concentric | 3† no disk      | NA                            | 10                   | NA | NA | NA | NA | NA |
|                 |                  |                            | NA              | 3†                            | 43                   | 41 | 39 | 37 | 35 | 34 |
|                 |                  |                            | 4† no disk      | 4† no disk                    | 35                   | 30 | 25 | 20 | 15 | 10 |
|                 | 140,000          | NA                         |                 |                               |                      |    |    |    |    |    |
| ALTITUDE (FT)   | UNIT SIZE (BTUH) | DIRECT VENT (2-PIPE) ONLY  |                 | NON-DIRECT VENT (1-PIPE) ONLY | NUMBER OF 90° ELBOWS |    |    |    |    |    |
|                 |                  | TERMINATION TYPE           | PIPE DIA (IN.)* | PIPE DIA (IN.)*               | 1                    | 2  | 3  | 4  | 5  | 6  |
| 9001 to 10,000‡ | 40,000           | 2 Pipe or 2-in Concentric  | 1-1/2           | 1-1/2                         | 42                   | 37 | 32 | 27 | 25 | 20 |
|                 |                  |                            | 2               | 2                             | 57                   | 55 | 53 | 51 | 49 | 47 |
|                 | 60,000           | 2 Pipe or 2-in Concentric  | 2               | 2                             | 45                   | 40 | 38 | 33 | 31 | 29 |
|                 |                  |                            | 2               | 2                             | 30                   | 25 | 14 | 9  | 7  | NA |
|                 | 80,000           | 2 Pipe or 2-in Concentric  | 2-1/2           | 2-1/2                         | 57                   | 55 | 53 | 51 | 49 | 47 |
|                 |                  |                            | 2-1/2           | 2-1/2                         | 21                   | 13 | 5  | NA | NA | NA |
|                 | 100,000          | 2 Pipe or 3-in Concentric  | 3               | 3                             | 54                   | 49 | 44 | 39 | 34 | 29 |
|                 |                  |                            | NA              | 3†                            | 39                   | 37 | 35 | 33 | 31 | 29 |
|                 | 120,000          | 2 Pipe or 3-in. Concentric | 4† no disk      | 4† no disk                    | 10                   | 5  | NA | NA | NA | NA |
|                 |                  |                            | 4† no disk      | 4† no disk                    | 10                   | 5  | NA | NA | NA | NA |
|                 | 140,000          | NA                         |                 |                               |                      |    |    |    |    |    |

\*-Disk usage. Unless otherwise specified, use perforated disk assembly (factory-supplied in loose parts bag). If one disk is stated, separate 2 halves of perforated disk assembly and use shouldered disk half. When using shouldered disk half, install screen side toward inlet box.

†Wide radius elbow.

‡Vent sizing for Canadian installations over 4500 ft (1370 m) above sea level are subject to acceptance by the local authorities having jurisdiction.

NA-Not Allowed; pressure switch will not make.

## NOTES:

1. Do not use pipe size greater than those specified in table or incomplete combustion, flame disturbance, or flame sense lockout may occur.

2. Size both the combustion-air and vent pipe independently, then use the larger diameter for both pipes.

3. Assume two 45° elbows equal one 90° elbow. Long radius elbows are desirable and may be required in some cases.

4. Elbows and pipe sections within the furnace casing and at the vent termination should not be included in vent length or elbow count.

5. The minimum pipe length is 5 ft for all applications.

6. Use 3-in. diameter vent termination kit for installations requiring 4-in diameter pipe.

**MAXIMUM ALLOWABLE EXPOSED VENT PIPE LENGTH (FT) WITH AND WITHOUT INSULATION  
IN WINTER DESIGN TEMPERATURE AMBIENT\***

| UNIT SIZE                  | WINTER DESIGN TEMPERATURE (°F) | MAX PIPE DIAMETER (IN.) | WITHOUT INSULATION | WITH 3/8-IN. OR THICKER INSULATION† |
|----------------------------|--------------------------------|-------------------------|--------------------|-------------------------------------|
| 040-08<br>040-12           | 20                             | 1-1/2                   | 51                 | 70                                  |
|                            | 0                              | 1-1/2                   | 28                 | 70                                  |
|                            | -20                            | 1-1/2                   | 16                 | 70                                  |
| 060-08<br>060-12<br>060-16 | 20                             | 2                       | 65                 | 70                                  |
|                            | 0                              | 2                       | 35                 | 70                                  |
|                            | -20                            | 2                       | 20                 | 70                                  |
| 080-12<br>080-16<br>080-20 | 20                             | 2-1/2                   | 70                 | 70                                  |
|                            | 0                              | 2-1/2                   | 47                 | 70                                  |
|                            | -20                            | 2-1/2                   | 28                 | 70                                  |
| 100-16<br>100-20           | 20                             | 3                       | 70                 | 70                                  |
|                            | 0                              | 3                       | 50                 | 70                                  |
|                            | -20                            | 3                       | 28                 | 70                                  |
| 120-20                     | 20                             | 4                       | 70                 | 70                                  |
|                            | 0                              | 4                       | 48                 | 70                                  |
|                            | -20                            | 4                       | 23                 | 70                                  |
| 140-20                     | 20                             | 4                       | 70                 | 70                                  |
|                            | 0                              | 4                       | 57                 | 70                                  |
|                            | -20                            | 4                       | 30                 | 70                                  |

\* Pipe length (ft) specified for maximum vent pipe lengths located in unconditioned spaces. Vent pipes located in unconditioned space cannot exceed the total allowable pipe length as specified in Maximum Allowable Pipe Length table.

† Insulation thickness based on R value of 3.5 per in.

## Performance data

| UNIT SIZE                                                | 040-08  | 040-12 | 060-08 | 060-12 | 060-16 | 080-12 | 080-16 | 080-20 | 100-16 | 100-20 | 120-20 | 140-20 |
|----------------------------------------------------------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| <b>CERTIFIED TEMP RISE RANGE (°F)</b>                    | 30—60   | 15—45  | 45—75  | 30—60  | 20—50  | 40—70  | 30—60  | 20—50  | 45—75  | 30—60  | 40—70  | 50—80  |
| <b>CERTIFIED EXT STATIC PRESSURE</b> Heating<br>(In. wc) | 0.10    | 0.10   | 0.12   | 0.12   | 0.12   | 0.15   | 0.15   | 0.15   | 0.20   | 0.20   | 0.20   | 0.20   |
|                                                          | Cooling | 0.50   | 0.50   | 0.50   | 0.50   | 0.50   | 0.50   | 0.50   | 0.50   | 0.50   | 0.50   | 0.50   |
| <b>AIRFLOW CFM‡</b>                                      | Heating | 850    | 1125   | 885    | 1065   | 1320   | 1190   | 1285   | 1785   | 1315   | 1690   | 1720   |
|                                                          | Cooling | 895    | 1215   | 900    | 1200   | 1545   | 1245   | 1525   | 1925   | 1570   | 1930   | 1990   |

### EFFICIENCY

| UNIT SIZE                                                                                 |                             |                         | 040-08   | 040-12 | 060-08 | 060-12 | 060-16 | 080-12 | 080-16 | 080-20 | 100-16  | 100-20  | 120-20  | 140-20  |      |
|-------------------------------------------------------------------------------------------|-----------------------------|-------------------------|----------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|---------|------|
| OUTPUT CAPACITY<br>BTUH* (ICS)<br>(Shaded capacities<br>are specified on<br>rating plate) | Direct<br>Vent (2-Pipe)     | Upflow                  | 37,000   | 37,000 | 56,000 | 56,000 | 56,000 | 74,000 | 74,000 | 74,000 | 93,000  | 93,000  | 112,000 | 127,000 |      |
|                                                                                           |                             | Downflow                | 37,000   | 37,000 | 56,000 | 56,000 | 56,000 | 74,000 | 74,000 | 74,000 | 93,000  | 93,000  | 112,000 | 127,000 |      |
|                                                                                           |                             | Horizontal              | 37,000   | 37,000 | 56,000 | 56,000 | 56,000 | 74,000 | 74,000 | 74,000 | 93,000  | 93,000  | 112,000 | 127,000 |      |
|                                                                                           | Non-Direct<br>Vent (1-Pipe) | Upflow                  | 37,000   | 37,000 | 56,000 | 56,000 | 56,000 | 74,000 | 74,000 | 74,000 | 93,000  | 93,000  | 112,000 | NA      |      |
|                                                                                           |                             | Downflow                | 37,000   | 37,000 | 56,000 | 56,000 | 56,000 | 74,000 | 74,000 | 74,000 | 93,000  | 93,000  | 112,000 | NA      |      |
|                                                                                           |                             | Horizontal              | 37,000   | 37,000 | 56,000 | 56,000 | 56,000 | 74,000 | 74,000 | 74,000 | 93,000  | 93,000  | 112,000 | NA      |      |
|                                                                                           | INPUT BTUH†                 |                         | 40,000   | 40,000 | 60,000 | 60,000 | 60,000 | 80,000 | 80,000 | 80,000 | 100,000 | 100,000 | 120,000 | 120,000 |      |
|                                                                                           | AFUE%<br>Nonweatherized ICS | Direct<br>Vent (2-Pipe) | Upflow   | 92.3   | 92.3   | 92.3   | 92.3   | 92.3   | 92.3   | 92.3   | 92.3    | 92.3    | 92.3    | 92.3    | 92.3 |
|                                                                                           |                             |                         | Downflow | 91.2   | 91.2   | 91.2   | 91.2   | 91.2   | 91.2   | 91.2   | 91.2    | 91.2    | 91.2    | 91.2    | 91.2 |
| Horizontal                                                                                |                             |                         | 92.1     | 92.1   | 92.1   | 92.1   | 92.1   | 92.1   | 92.1   | 92.1   | 92.1    | 92.1    | 92.1    | 92.0    |      |
| Non-Direct<br>Vent (1-Pipe)                                                               |                             | Upflow                  | 92.1     |        |        |        |        |        |        |        |         |         |         | NA      |      |
|                                                                                           |                             | Downflow                | 91.0     |        |        |        |        |        |        |        |         |         |         | NA      |      |
|                                                                                           |                             | Horizontal              | 91       |        |        |        |        |        |        |        |         |         |         | NA      |      |

\* Capacity and AFUE in accordance with U.S. Government DOE test procedures.

† Gas input ratings are certified for elevations to 2000 ft. For elevations above 2000 ft, reduce ratings 2% for each 1000 ft above sea level. In Canada, derate the unit 5% for elevations 2000 to 4500 ft above sea level.

‡ Airflow shown is for bottom only return-air supply. For air delivery above 1800 CFM, see Air Delivery table for other options. A filter is required for each return-air supply.

ICS—Isolated Combustion System

# Electrical data

| UNIT SIZE                             | 040-08   | 040-12 | 060-08 | 060-12 | 060-16 | 080-12 | 080-16 | 080-20 | 100-16 | 100-20 | 120-20 | 140-20 |
|---------------------------------------|----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| UNIT VOLTS—HERTZ—PHASE                | 115—60—1 |        |        |        |        |        |        |        |        |        |        |        |
| OPERATING VOLTAGE RANGE (Min—Max)*    | 104—127  |        |        |        |        |        |        |        |        |        |        |        |
| MAXIMUM UNIT AMPS                     | 6.1      | 7.3    | 6.1    | 7.1    | 9.5    | 7.6    | 10.0   | 14.1   | 10.2   | 14.8   | 14.6   | 14.3   |
| UNIT AMPACITY†                        | 8.4      | 10.0   | 8.4    | 9.8    | 12.8   | 10.4   | 13.4   | 18.4   | 13.5   | 19.3   | 19.1   | 18.8   |
| MINIMUM WIRE SIZE                     | 14       | 14     | 14     | 14     | 14     | 14     | 14     | 12     | 14     | 12     | 12     | 12     |
| MAXIMUM WIRE LENGTH (Ft)‡             | 44       | 37     | 44     | 38     | 29     | 36     | 28     | 31     | 27     | 30     | 30     | 30     |
| MAXIMUM FUSE SIZE OR CKT BKR (Amps)** | 15       | 15     | 15     | 15     | 15     | 15     | 15     | 20     | 15     | 20     | 20     | 20     |
| TRANSFORMER (24v)                     | 40va     |        |        |        |        |        |        |        |        |        |        |        |
| EXTERNAL CONTROL POWER AVAILABLE      | Heating  |        |        |        |        |        |        |        |        |        |        |        |
|                                       | Cooling  |        |        |        |        |        |        |        |        |        |        |        |
| AIR CONDITIONING BLOWER RELAY         | Standard |        |        |        |        |        |        |        |        |        |        |        |


\* Permissible limits of the voltage range at which the unit will operate satisfactorily.

† Unit ampacity = 125% of largest operating component's full load amps plus 100% of all other potential operating components' (EAC, humidifier, etc.) full load amps.


‡ Length is as measured 1 way along wire path between unit and service panel for maximum 2% voltage drop.

\*\* Time-delay type is recommended.

## Typical wiring schematic

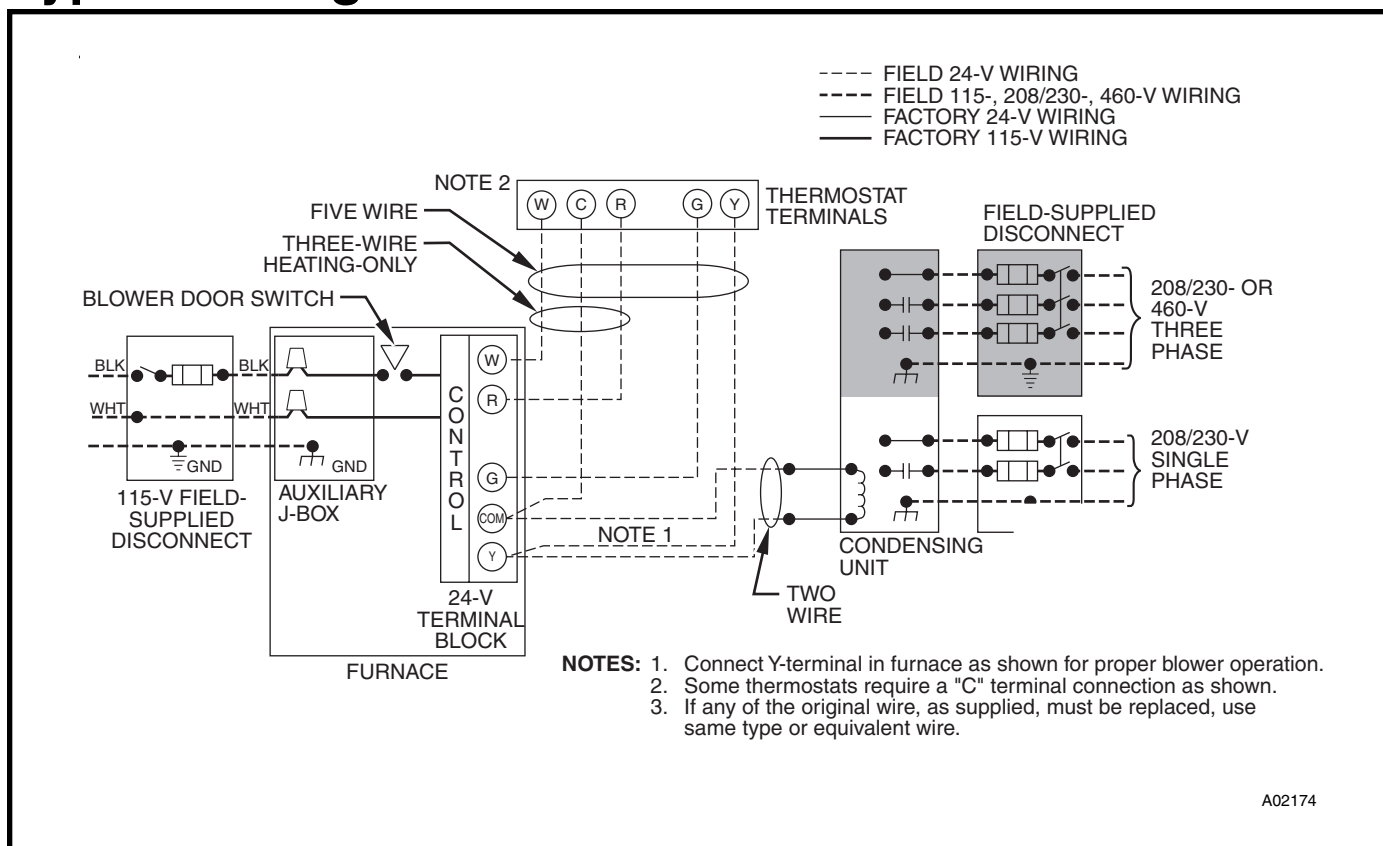


# Typical installations

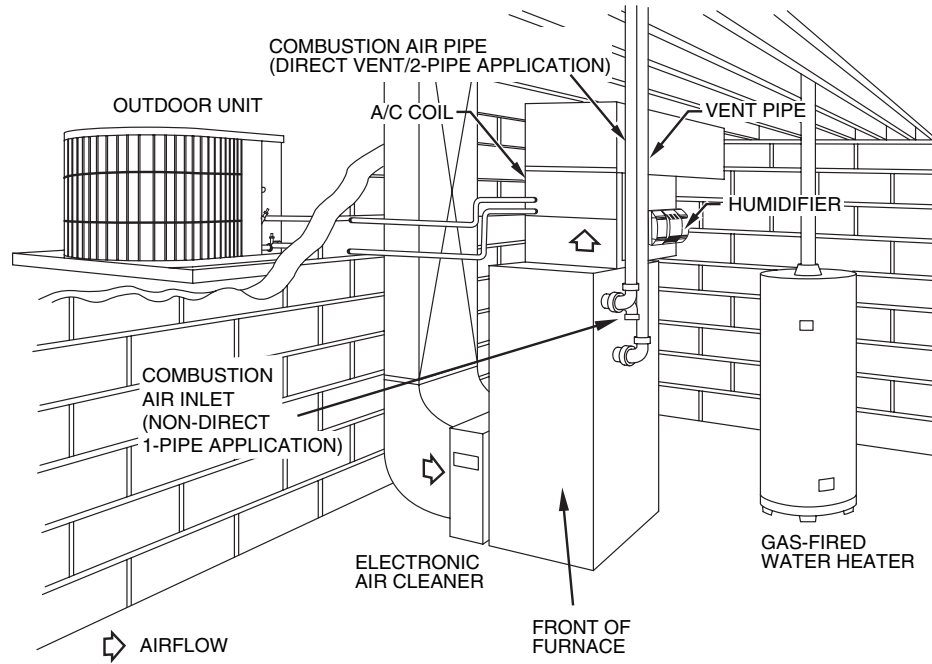



**Basement — Upflow Application**

A05064

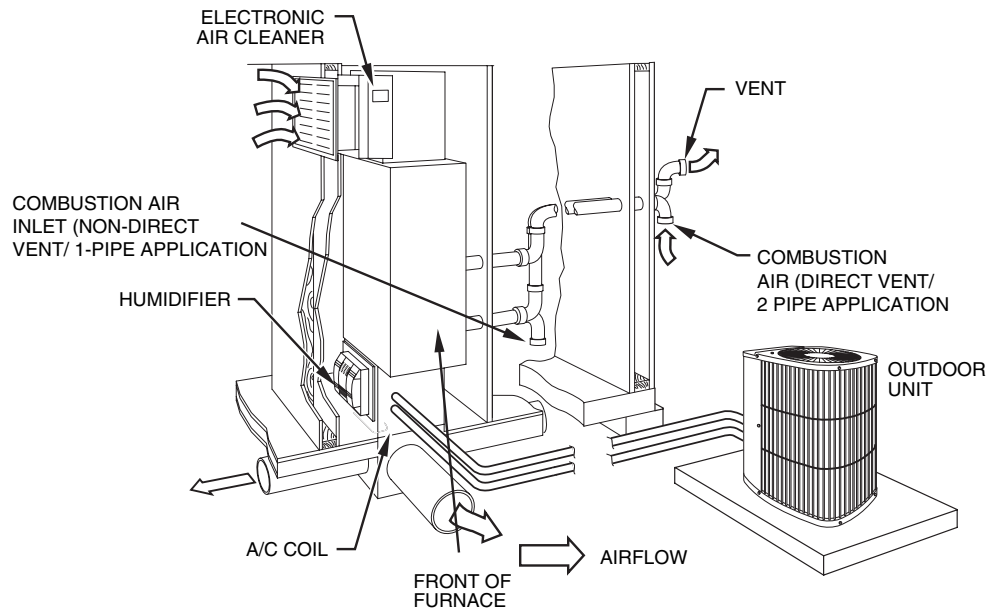

**Closet — Downflow Application**

A05065

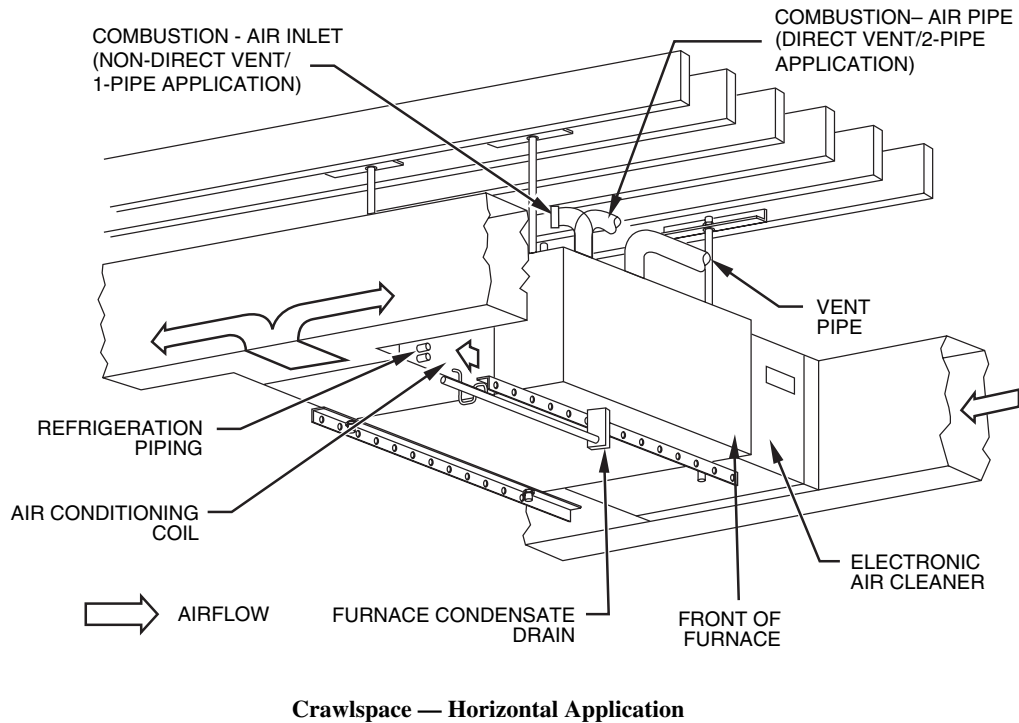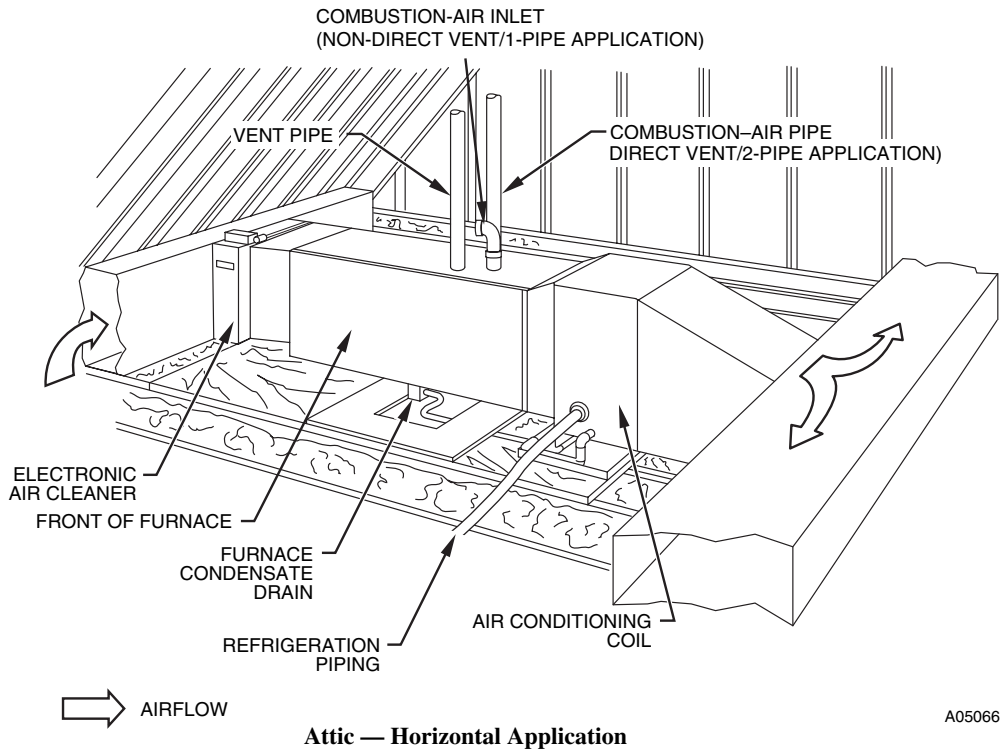



# Guide Specifications

## Base 90 Single-Stage Gas Furnace 58MCB

### GENERAL

#### System Description

Furnish a \_\_\_\_\_ (4-way multi-poise) fixed capacity gas-fired condensing furnace for use with natural gas or propane (factory authorized conversion kit required for propane); furnish cold air return plenum; furnish side (external) filter rack.

#### Quality Assurance

Unit will be designed, tested and constructed to the current ANSI Z 21.47/CSA 2.3 design standard for gas-fired central furnaces.

Unit will be 3rd party certified by CSA to the current ANSI Z 21.47/CSA 2.3 design standard for gas-fired central furnaces. Unit will carry the CSA Blue Star® and Blue Flame® labels. Unit efficiency testing will be performed per the current DOE test procedure as listed in the Federal Register.

Unit will be certified for capacity and efficiency and listed in the latest GAMA Consumer's Directory of Certified Efficiency Ratings.

Unit will carry the current Federal Trade Commission Energy Guide efficiency label.

#### Delivery, Storage, and Handling

Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

#### Warranty (for inclusion by specifying engineer)

U.S. and Canada only. Warranty certificate available upon request.

### PRODUCTS

#### Equipment

Components shall include: slow-opening gas valve to reduce ignition noise, regulate gas flow, with electric switch gas shut-off; flame proving sensor, hot surface igniter, pressure switch assembly verifies inducer operation; flame rollout switch, drain tubing and installed condensate drain trap, blower and inducer assembly, 40va transformer; low-voltage (heating) (heating/cooling) thermostat.

#### Blower Wheel and Blower Motor

Galvanized blower wheel shall be centrifugal type, statically and dynamically balanced. Blower motor of PSC type shall be permanently lubricated with sealed bearings, of \_\_\_\_\_ hp, and shall be multiple-speed direct drive. Blower motor shall be soft mounted to the blower scroll to reduce vibration transmission.

#### Filters

Furnace shall have reusable-type filters. Filter shall be \_\_\_\_\_ in (x) \_\_\_\_\_ in.

#### Casing

Casing shall be of .030 in. thickness minimum, pre-painted galvanized steel.

#### Inducer Motor

Inducer motor shall be soft mounted to reduce vibration transmission.

#### Primary Heat Exchangers

Primary Heat exchangers shall be 3-Pass 20 gauge corrosion resistant aluminized steel of fold-and-crimp sectional design, which operates under negative pressure.

#### Secondary Heat Exchangers

Secondary Heat exchangers shall be of a flow-through design having a patented interior laminate coating of polypropylene for greater corrosion resistance with fold-and-crimp design, which operates under negative pressure.

#### Controls

Controls shall include a micro-processor based integrated electronic control board with at least 11 service troubleshooting codes displayed via diagnostic flashing LED light on the control, has ability to store fault codes, when activated a self-test feature checks all major functions of the furnace within one minute, and a replaceable automotive-type circuit protection fuse. Multiple operational settings available including separate blower speeds. Cooling airflow will be selectable between 350 or 400 CFM per ton of air conditioning.

#### Operating Characteristics

Heating Capacity shall be \_\_\_\_\_ Btuh input;

\_\_\_\_\_ Btuh output capacity.

Fuel Gas Efficiency shall be 92% AFUE.

Air delivery shall be \_\_\_\_\_ cfm minimum at 0.50 in. wg. external static pressure.

Dimensions shall be: depth \_\_\_\_\_ in.; width \_\_\_\_\_ in.; height \_\_\_\_\_ in. (casing only). Height shall be \_\_\_\_\_ in. with A/C coil and \_\_\_\_\_ in. overall with plenum.

#### Electrical Requirements

Electrical supply shall be 115 volts, 60 Hz, single-phase (nominal). Minimum wire size shall be \_\_\_\_\_ AWG; maximum fuse size or HACR-type, designated circuit breaker shall be \_\_\_\_\_ Amps.

#### Special Features

Refer to section of the product data sheet identifying accessories and descriptions for specific features and available enhancements.