

High Wall Cooling Only System

Indoor Model: 40MKCB18B--3

Outdoor Model: 24AHA418A003/124ANS018000

Submittal Data

Job Data: _____ Location: _____

Buyer: _____ Buyer P.O. #: _____ Carrier #: _____

Unit Number: _____ Model Number: _____

Performance Data Certified By: _____ Date: _____

STANDARD FEATURES

- Small footprint
- Fixed Speed Compressor
- WeatherArmor Ultra™ cabinet
- Low ambient operation to -20°F (with low ambient accessory)
- 200 Ft. line lengths
- Modes: Cool, Dry, Fan, Auto
- Sleep mode
- Dehumidification mode
- Timer
- Louver Control (Fixed or Swing)
- Follow me
- Quiet operation



CONTROL FEATURES

- Wireless remote control (standard)
- Wired remote control (optional)

For specific information on indoor or outdoor unit see Product Data
(Unless otherwise indicated, data applies to both indoor and outdoor models)

System	Size		18
	Outdoor Model		24AHA418A003 124ANS018000
	Indoor Model		40MKCB18B--3
Performance	Cooling Rated Capacity	Btu/h	18,000
	SEER		14.0
	EER		12.2
Controls	Wireless Remote Controller (°F/°C)		Standard
	Wired Remote Controller (°F/°C)		Optional
Operating Range	Cooling Outdoor DB Min - Max	°F	55~125 (-20°F w / Low-Ambient Kit)
	Cooling Indoor DB Min - Max	°F	64~90
Piping	Total Piping Length	Ft.	200
	Drop (OD above ID)	Ft.	200
	Lift (OD below ID)	Ft.	65
	Outdoor Pipe Connection Size - Liquid	In.	3/8
	Outdoor Pipe Connection Size - Suction	In.	5/8
	Indoor Pipe Connection Size - Liquid	In.	3/8
	Indoor Pipe Connection Size - Suction	In.	5/8

	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
Electrical	Power Supply	Indoor and outdoor units have dedicated power supply	
	MCA (Outdoor)	A.	11.8
	MOCP - Fuse Rating (Outdoor)	A.	20
	MCA (Indoor)	A.	1
Outdoor	MOCP - Fuse Rating (Indoor)	A.	15
	Unit Width	In.	36.9
	Unit Height	In.	31.1
	Unit Depth	In.	14.6
	Net Weight	Lbs.	146.0
	Airflow	CFM	1285
Indoor	Unit Width	In.	46.7
	Unit Height	In.	13.4
	Unit Depth	In.	10.2
	Net Weight	Lbs.	37.5
	Number of Fan Speeds		4
	Airflow (lowest to highest)	CFM	475/570/695/710
	Sound Pressure (lowest to highest)	dB(A)	44/47/50/51
	Air throw Data	Ft.	20

Accessories

Controls Kit (Required, sold separately)

Wired Remote Control

Condensate Pump

Crankcase Heater

Low Ambient Kit

Winter Start Kit

Hard Start Kit

Wind Baffle

Stacking Kit


Wall Mounting Kit

Liquid Line Solenoid Kit


Construction View

Indoor Unit 40MKCB18B--3

Outdoor Unit 24AHA418A003/124ANS018000

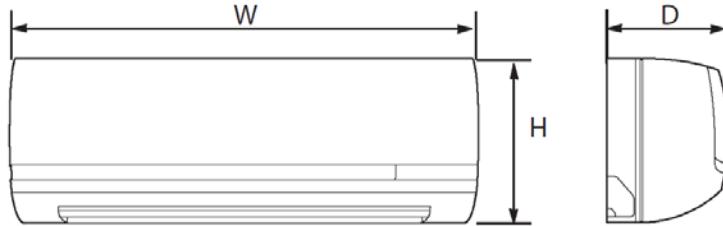

Unit Size	Height (H) in. (mm)	Width (W) in. (mm)	Depth (D) in. (mm)	Operating Weight lb (kg)
18	13.4 (343)	46.69 (1186)	10.16 (258)	37.5 (17)

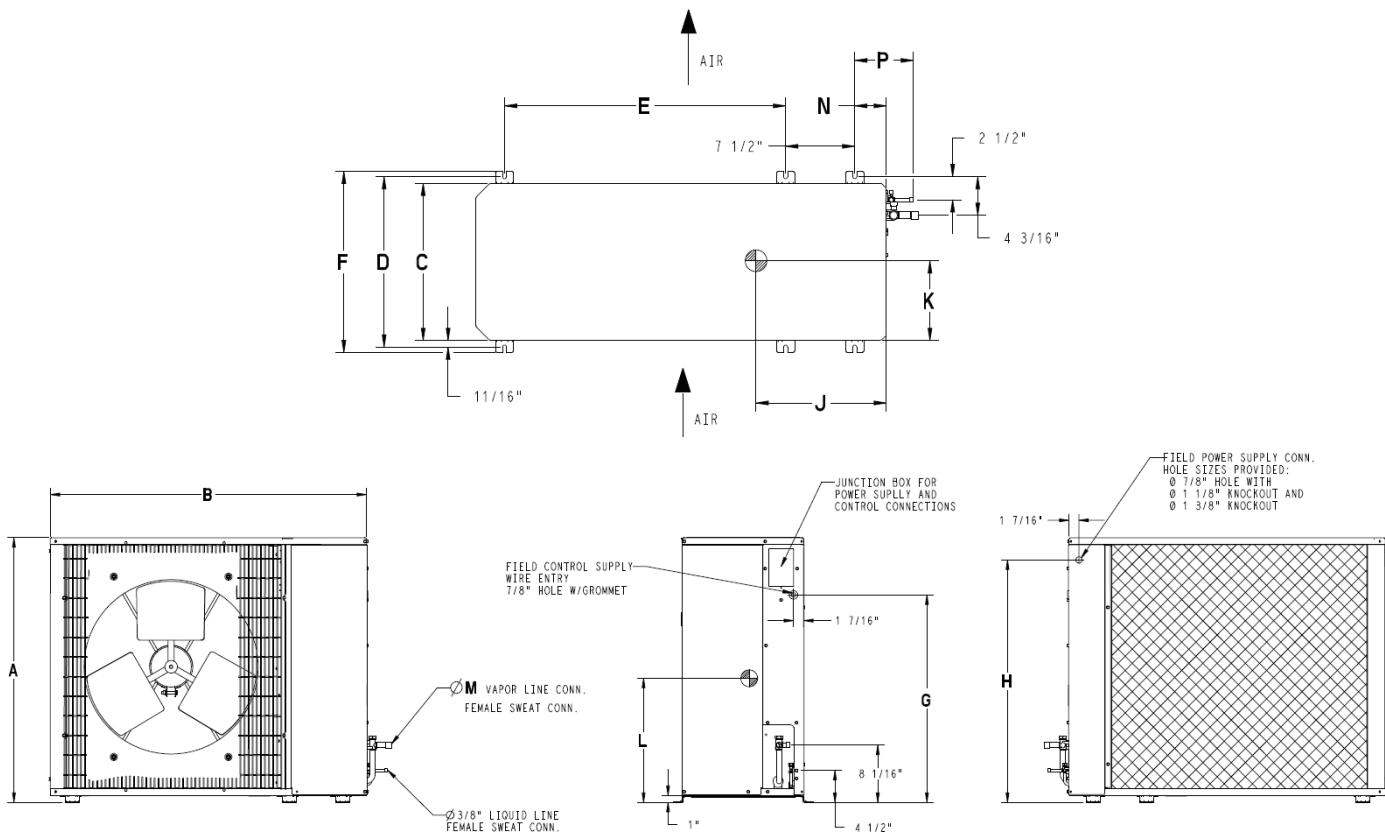

Unit Size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Operating Weight lb (kg)
18	31.13 (790.4)	36.94 (938)	14.56 (370)	16 (406)	23.44 (595.5)	17.18 (436)	23.13 (587.6)	28.06 (712.2)	14 (355.6)	6.75 (117.5)	11.63 (295.3)	.75 (19.1)	2.87 (73)	4.94 (126.2)	146 (66.2)

