

High Wall Cooling Only System

Indoor Model: 40MKCB32B--3

Outdoor Model: 24AHA436A003/124ANS036000

Submittal Data

Job Data: _____ Location: _____

Buyer: _____ Buyer P.O. #: _____ Carrier #: _____

Unit Number: _____ Model Number: _____

Performance Data Certified By: _____ Date: _____

STANDARD FEATURES

- Small footprint
- Fixed Speed Compressor
- WeatherArmor Ultra™ cabinet
- Low ambient operation to -20°F (with low ambient accessory)
- 200 Ft. line lengths
- Modes: Cool, Dry, Fan, Auto
- Sleep mode
- Dehumidification mode
- Timer
- Louver Control (Fixed or Swing)
- Follow me
- Quiet operation

CONTROL FEATURES

- Wireless remote control (standard)

For specific information on indoor or outdoor unit see Product Data
(Unless otherwise indicated, data applies to both indoor and outdoor models)

System	Size		32
	Outdoor Model		24AHA436A003 124ANS036000
	Indoor Model		40MKCB32B--3
Performance	Cooling Rated Capacity	Btu/h	32,000
	SEER		14.0
	EER		12.2
Controls	Wireless Remote Controller (°F/°C)		Standard
	Wired Remote Controller (°F/°C)		N/A
Operating Range	Cooling Outdoor DB Min - Max	°F	55~125 (-20°F w / Low-Ambient Kit)
	Cooling Indoor DB Min -Max	°F	64~90
Piping	Total Piping Length	Ft.	200'
	Drop (OD above ID)	Ft.	200'
	Lift (OD below ID)	Ft.	65'
	Outdoor Pipe Connection Size - Liquid	In.	3/8"
	Outdoor Pipe Connection Size - Suction	In.	7/8"
	Indoor Pipe Connection Size - Liquid	In.	3/8"
	Indoor Pipe Connection Size - Suction	In.	7/8"

Electrical	Outdoor Voltage, Phase, Cycle		V/Ph/Hz	208/230-1-60
	Indoor Voltage, Phase, Cycle		V/Ph/Hz	208/230-1-60
	Power Supply		Indoor and outdoor units have dedicated power supply	
	MCA (Outdoor)		A.	18.3
	MOCP - Fuse Rating (Outdoor)		A.	30
	MCA (Indoor)		A.	1
Outdoor	MOCP - Fuse Rating (Indoor)		A.	15
	Unit Width		In.	44.5
	Unit Height		In.	37.1
	Unit Depth		In.	17.1
	Net Weight		Lbs.	184.0
	Airflow		CFM	2615
Indoor	Unit Width		In.	57.1
	Unit Height		In.	13.4
	Unit Depth		In.	10.4
	Net Weight		Lbs.	55.1
	Number of Fan Speeds			4
	Airflow (lowest to highest)		CFM	525/685/834/847
	Sound Pressure (lowest to highest)		dB(A)	46/48/52/53
	Air throw Data		Ft.	25

Accessories

☐ Controls Kit (Required, sold separately)

☐ Condensate Pump

☐ Crankcase Heater

☐ Low Ambient Kit

☐ Winter Start Kit

☐ Hard Start Kit

☐ Wind Baffle

☐ Stacking Kit


☐ Wall Mounting Kit

☐ Liquid Line Solenoid Kit



Construction View

Indoor Unit 40MKCB32B--3

Outdoor Unit 24AHA436A003/124ANS036000

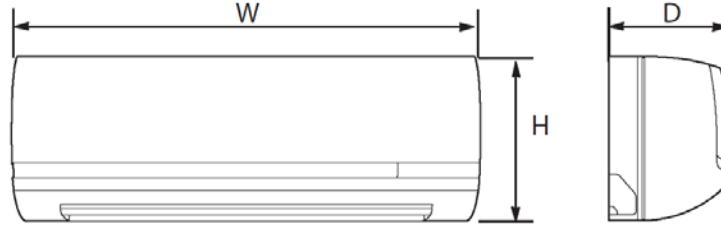

Unit Size	Height (H) in. (mm)	Width (W) in. (mm)	Depth (D) in. (mm)	Operating Weight lb (kg)
32	13.4 (343)	57.1 (1450)	10.4 (265)	55.1 (25.0)

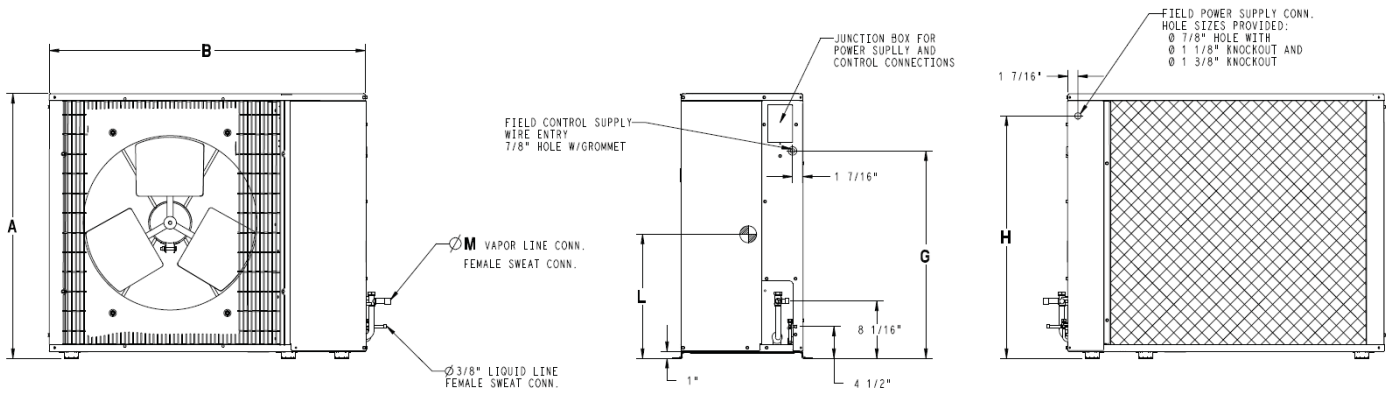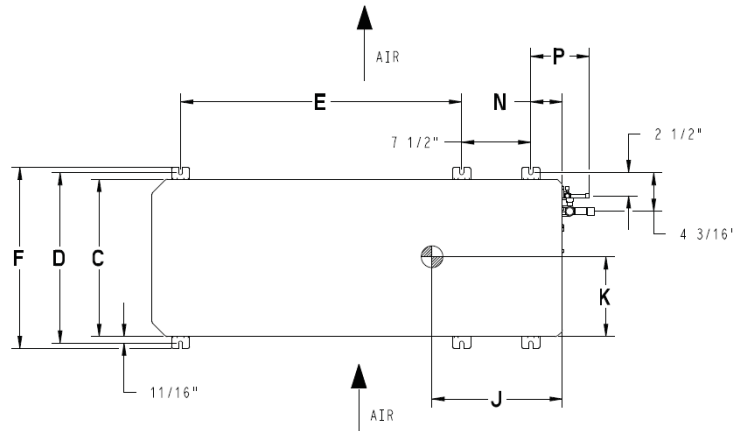

Unit Size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Operating Weight lb (kg)
36	37.13 (943.1)	44.50 (1130)	17.06 (433)	18.87 (479)	30.50 (774)	19.63 (498)	29.13 (485)	34.06 (865)	13.68 (347)	8.13 (206)	15.94 (404)	.94 (13)	3.37 (85)	6.37 (161)	184 (83.4)

