

High Static Ducted Slim Heat Pump Ductless System

Indoor Model: 45MBDAQ48XH3




Job Dat:

Location:

Tag #:

Carrier#:

Date:

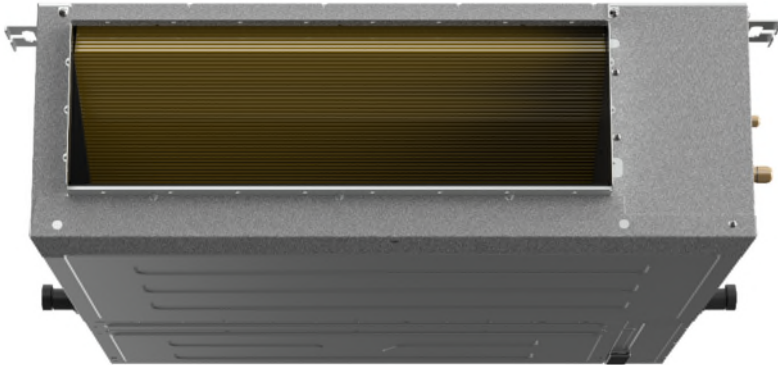


- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Vertical or Horizontal Installation
 - Rear or Bottom Return
 - Outside Air Intake
 - Condensate Lift pump shipped with the unit
 - Follow Me (senses temperature at handheld remote)
 - Refrigerant Leak Detection Sensor
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating

RESIDENTIAL APPLICATION LIMITED WARRANTY*


- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

Air outlet dimensions

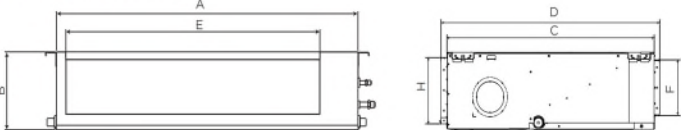

Air inlet dimensions

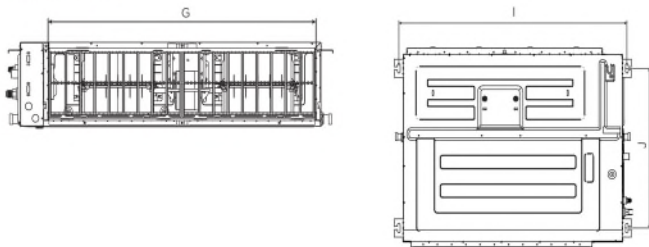

INDOOR UNIT DIMENSIONS					
Capacity	Unit	OUTLINE DIMENSION			
		A	B	C	D
36K/48K	inch/mm	47.2/1200	11.8/300	29.5/750	31.3/795
		AIR OUTLET OPENING SIZE		AIR RETURN OPENING SIZE	
		E	F	G	H
		40.4/1027	9.2/233	43.0/1092	10.5/267
		SIZE OF MOUNTED LUG			
		I	J		
		48.8/1240	25.2/640		

Indoor - Heat Pump			
System	Indoor Model #		45MBDAQ48XH3
	Indoor Size		48000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	5
Piping	Pipe Connection Size - Liquid	in (mm)	3/8(9.52)
	Pipe Connection Size - Suction	in (mm)	3/4(19)
Operating Range	Cooling Indoor DB Min - Max	*F(*C)	60~90(16~32)
	Heating Indoor DB Min - Max	*F(*C)	32~86(0~30)
Indoor Coil	No. Rows	4	
	Fins per inch	19	
	Circuits	9	
Indoor Unit	Number of Fan Speeds		1000/950/880
	Airflow (highest to lowest)	CFM	1648.08 / 1471.50 / 1294.92 / 1059.48 //
	Sound Pressure (highest to lowest)	dB(A)	N/A/51/46/42/40
Dimensions	Body Height	in (mm)	11.81(300)
	Body Width	in (mm)	47.24(1200)
	Body Depth	in (mm)	29.53(750)
	Body Net Weight	lbs (kg)	111.33(50.5)
	Shipping Height	in (mm)	14.13(359)
	Shipping Width	in (mm)	56.10(1425)
	Shipping Depth	in (mm)	33.86(860)
		Shipping Net Weight	lbs (kg) 124.78(56.6)
Accessories			
Standard	Wireless Remote Controller (*F/*C Convertible)		
	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
Optional	Wired Remote Control with Timer Function	KSACN1201AAA	
	24V Mini Interface	KSAIC0601230	
		24V GEN 3 Interface	KSAIC0501230



R-454B



R-454B