

High Wall Cooling Only Ductless System

Indoor Model: 45MHHAC18XC3


Job Data:

Tag #:

Date:

Location:

Carrier#:

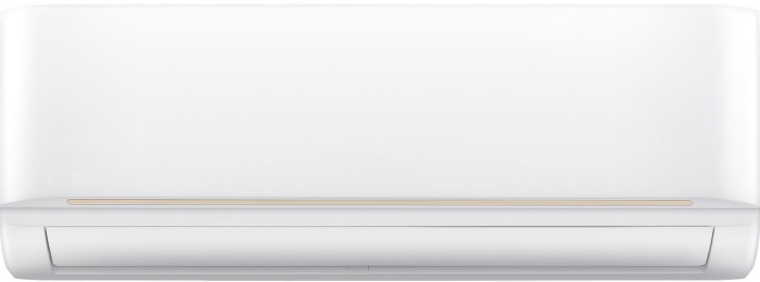


INDOOR STANDARD FEATURES

- Modes: Cool, Dry, Fan, Auto
- Four fan speeds
- Sleep Mode
- Turbo Mode
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating
- Pipe Connection Size - Liquid: 1/4in (6.35mm)
- Pipe Connection Size - Suction: 1/2in (12.7mm)

RESIDENTIAL APPLICATION LIMITED WARRANTY\*


- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

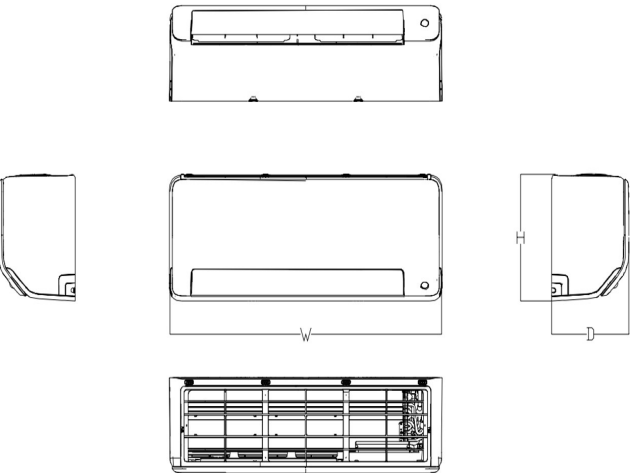

| INDOOR UNIT DIMENSIONS |      |       |      |       |
|------------------------|------|-------|------|-------|
| Capacity               | Unit | W     | D    | H     |
| 18K                    | mm   | 971   | 228  | 321   |
|                        | inch | 38.23 | 8.98 | 12.64 |

| 45MHHAC18XC3    |                                                |  |                                     |
|-----------------|------------------------------------------------|--|-------------------------------------|
| System          | Indoor Model #                                 |  | 45MHHAC18XC3                        |
|                 | Indoor Size                                    |  | 18000                               |
| Electrical      | Voltage, Phase, Cycle                          |  | V/Ph/Hz 208-230/1/60                |
|                 | Power Supply                                   |  | Indoor unit powered by outdoor unit |
|                 | MCA                                            |  | A. 3                                |
| Operating Range | Cooling Indoor DB Min - Max                    |  | °F(°C) 60~90(16 ~ 32)               |
| Indoor Coil     | Face Area                                      |  | Sq. Ft. 2.71                        |
|                 | No. Rows                                       |  | 2                                   |
|                 | Fins per inch                                  |  | 22                                  |
|                 | Circuits                                       |  | 4                                   |
| Indoor Unit     | Number of Fan Speeds                           |  | 1200/1000/800                       |
|                 | Airflow (highest to lowest)                    |  | CFM 471/353.1/306.1                 |
|                 | Sound Pressure (highest to lowest)             |  | dB(A) 44/37.0/21.0/19               |
| Dimensions      | Height                                         |  | in (mm) 12.64(321)                  |
|                 | Width                                          |  | in (mm) 38.23(971)                  |
|                 | Depth                                          |  | in (mm) 8.98(228)                   |
|                 | Net Weight                                     |  | lbs (kg) 24.91(11.3)                |
|                 | Shipping Height                                |  | in (mm) 15.94(405)                  |
|                 | Shipping Width                                 |  | in (mm) 41.14(1045)                 |
|                 | Shipping Depth                                 |  | in (mm) 12.01(305)                  |
| CONTROLS        | Shipping Net Weight                            |  |                                     |
|                 | lbs (kg)                                       |  | 32.85(14.9)                         |
|                 | Standard                                       |  |                                     |
|                 | Wireless Remote Controller (*F/°C Convertible) |  |                                     |
|                 | Optional                                       |  |                                     |
|                 | Wired Remote Control 7 Day Programmable        |  | KSACN1401AAA                        |
|                 | Wired Remote Control with Timer Function       |  | KSACN1201AAA                        |
|                 | Wi-Fi™ Kit High Wall                           |  | KSAIF0701AAA                        |
|                 | 24V Mini Interface                             |  | KSAIC0601230                        |



R-454B