

Multipoise Crossover Air Handler

Indoor Model: 45MUAAQ48XX3



Job Data:

Tag #:

Date:

Location:

Carrier#:




- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Factory installed leak detection system
 - Conventional Lineset
 - Dual Voltage (115V/230V)
 - Built-In 24V Interface
 - Constant Air Motor/Blower
 - Quiet indoor operation
 - Anti-corrosive fin coating

RESIDENTIAL APPLICATION LIMITED WARRANTY*

• Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

45MUAAQ48XX3			
System	Indoor Model #		45MUAAQ48XX3
	Indoor Size		48000
Electrical	Voltage, Phase, Cycle		V/Ph/Hz 115-208-230/1/60
	Power Supply		Indoor unit powered separate from outdoor unit
	MCA		A. 11
Piping	Pipe Connection Size - Liquid		in (mm) 3/8 (9.52)
	Pipe Connection Size - Suction		in (mm) 3/4(19)
Operating Range	Cooling Indoor DB Min - Max		°F(°C) 60~90(16~32)
	Heating Indoor DB Min - Max		°F(°C) 32~86(0~30)
Indoor Coil	Face Area		Sq. Ft. 4.88
	No. Rows		5
	Fins per inch		20
	Circuits		14
Indoor Unit	Number of Fan Speeds		820/720/615
	Airflow (highest to lowest)		CFM 1600.99~1094.80
	Sound Pressure		dB(A) 34
Dimensions	Height		in (mm) 52.99(1346)
	Width		in (mm) 24.49(622)
	Depth		in (mm) 21.02(534)
	Net Weight		lbs (kg) 162.92(73.9)
	Shipping Height		in (mm) 56.30(1430)
	Shipping Width		in (mm) 28.15(715)
	Shipping Depth		in (mm) 21.20(640)
	Shipping Net Weight		lbs (kg) 190.92(86.6)
CONTROLS			
Standard	Wireless Remote Controller (°F/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable		KSACN1401AAA

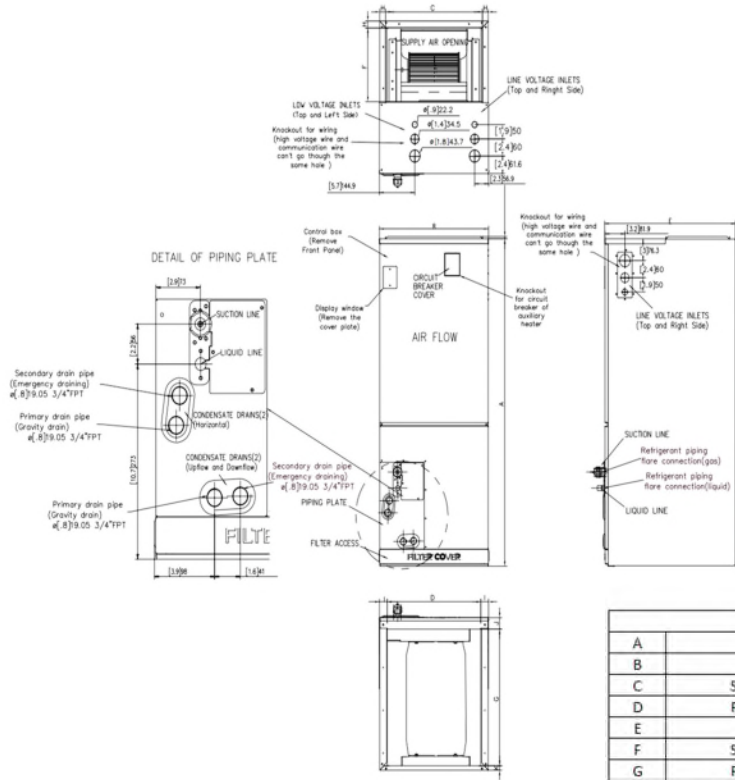

Dimensions		18K/24K		30K/36K		48K/60K	
		inch	mm	inch	mm	inch	mm
A	Model Height	45	1143	49	1245	53	1346
B	Model Width	17.5	445	21	534	24.5	622
C	Supply Air Opening Width	15.6	397	19.1	486	22.6	575
D	Return Air Opening Width	15.1	384	18.6	473	22.1	562
E	Model Depth	21	534	21	534	21	534
F	Supply Air Opening Depth	10.3	260	10.3	260	10.3	260
G	Return Air Opening Depth	18.8	476	18.8	476	18.8	476
H	Supply Air Opening Clearance	0.9	24	0.9	24	0.9	24
I	Return Air Opening Side Clearance	1.3	32	1.3	32	1.1	28
J	Return Air Opening Front Clearance	1.5	38	1.6	41	1.6	41
K	Return Air Opening Back Clearance	0.6	16	0.6	16	0.8	19
Refrigerant Piping Flare Connection (Gas)		3/4	19	3/4	19	3/4	19
Refrigerant Piping Flare Connection (Liquid)		3/8	9.52	3/8	9.52	3/8	9.52



Puron Advance™