Carrier

ROOM AIR PURIFIER

Quick Start Guide

RMAP-ST
RMAP-XL
RMAP-SST
RMAP-SXL

⚠
CAUTION

• Be sure to unplug the unit before removing the filter packaging.
• Remove the plastic packaging from the filter before use.
• Keep plastic packaging away from children as it may cause suffocation.

How to Prepare/Change the Filter

**1** Hold the top cover of the product with both hands and pull up.

2 Grasp the filter cover hole on the rear and pull it forward. Remove the filter from the unit by pulling it straight out.


Filter cover hole

3 Remove the plastic packaging from the filter.
▸ Failing to remove the packaging will result in abnormal sounds and the filter will not work properly; and it may cause a fire or other damage to the product.


Plastic packaging

4 Slide the filter back into the unit.

5 Replace filter cover.
▸ Insert the cover into the fixed groove at the bottom of the product.
▸ Slide the cover forward so that the cover fits into the top grooves.

Fixed groove at bottom
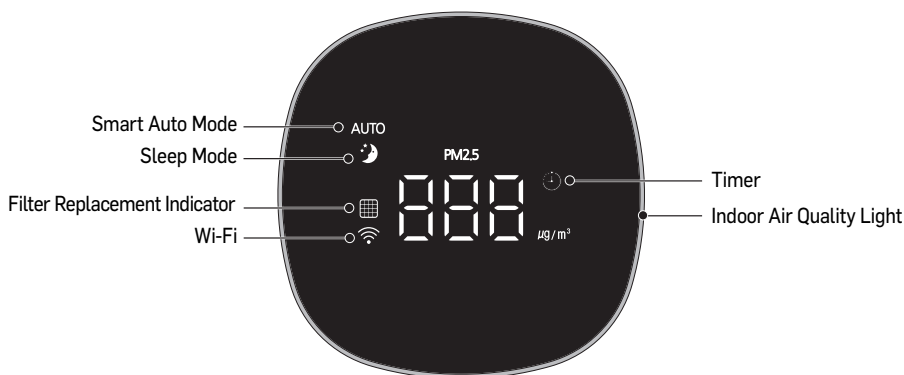
Cover-positioning groove at top

6 Hold the top cover of the product with both hands and slide it back in place, making sure the logo appears in the front.
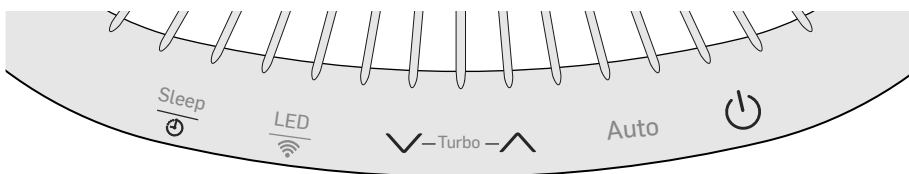

7 When the filter installation is complete, plug the unit into a 120V outlet, press the $\frac{Sleep}{\odot}$ + "Auto" button on the control panel for five seconds or more to initialize it.

▸ The red filter light will turn off when the product is reset.

Display

Smart Auto Mode — ○ AUTO
Sleep Mode — ○ 🌙
PM2.5
Filter Replacement Indicator — ○ ▦
Wi-Fi — ○ 📶
$\mu g / m^3$
— Timer
— Indoor Air Quality Light

Control Panel

$\frac{Sleep}{\odot}$ $\frac{LED}{\widehat{\approx}}$ ∨ — Turbo — ∧   Auto   ⏻

Control Panel Descriptions

$\frac{Sleep}{\odot}$	Sleep mode / Timer	∧	Turn up the fan speed and time (by 1 hour)
$\frac{LED}{\widehat{\approx}}$	LED ON/OFF & Wi-Fi® connection	Auto	Smart automatic operation
∨	Turn down the fan speed and time (by 1 hour)	⏻	Power ON/OFF

Normal Operation

**1** Press the ⏻ button to turn on.
  ▸ The previously selected operation mode will be displayed.

2 Press the ⌄ ⌃ button on the control panel to select your desired fan speed.
  ▸ You can adjust the fan speed from level 1 (F1) to level 18 (F18).

  Note: The default home display on Wi-Fi® models will show a PM2.5 reading. Once the ⌄ ⌃ button is pushed, the display will switch to show designated fan speed.

PM2.5

17 μg/m³

How to Install Casters (Optional)

1 Inside of the air purifier package, there is a small box containing four casters and eight screws.

2 Remove the four bottom bases from the air purifier with a screw driver.

3 Replace each base with a caster, utilizing two screws per caster.

4 Retain the removed bottom bases and screws for future use.

AHAM® VERIFIDE   ETL us Intertek   energy ENERGY STAR