



### 14 SEER R-410A PACKAGE DUAL FUEL HEAT PUMP 2 to 5 TONS Two-Stage, Gas Heating / Electric Heating and Cooling Unit

#### REFRIGERATION CIRCUIT

- All models are equipped with high efficiency two-stage Copeland UltraTech scroll compressor.
- Thermostat Expansion Valve (TXV) on select models to control refrigerant flow.
- Variable Speed GE ECM 2.3 indoor motor with electronic speed controller on all models.
- High and Low Pressure Switches for excellent compressor protection.
- R-410A environmentally sound refrigerant.

#### BUILT TO LAST

- Stainless Steel tubular gas heat exchanger for more corrosion resistance; tubular design delivers efficient heat transfer and airflow.
- The cabinet is made of galvanized steel, phosphate coated with a tough acrylic finish coat for long lasting weatherproof construction.
- One piece weather resistant top. Access panels for easy service. Side by side supply and return.
- Integral 18 gauge base rails with fork-lift access. Holes provided for lifting lugs makes rooftop installation easier.
- The condenser coil has a sturdy wire inlet grille and UV rated vinyl mesh installed on the surface of the coil for additional protection.
- Advanced Air Management System for quieter operation.
- Two-speed PSC combustion air blower with ball bearings.

#### EASY TO INSTALL AND SERVICE

- Combination gas heating / electric heating and cooling unit, self contained for year-round comfort. Systems can be installed on rooftop or ground level. The unit is shipped in the horizontal position and can easily be converted to downflow.
- Externally-mounted gauge ports allow for more accurate reading of operating conditions while servicing.
- Electrical and gas controls located behind one exterior panel for easier maintenance.
- Adjustable electronic fan control with optional low speed continuous fan feature responds quickly to circulate conditioned air and provide maximum comfort.
- Advanced electronic integrated defrost control switches quietly from cooling to heating.
- Comfort Alert™ UltraTech™ Diagnostics device on all models.
- Dehumidification mode in cooling.

#### WARRANTY\*

- 10 year No Hassle Replacement™ limited warranty
- Lifetime heat exchanger limited warranty with timely registration
- 5 year parts limited warranty (including compressor and coils)
  - With timely registration, an additional 5 year parts limited warranty (including compressor and coils)

\*Applies to original purchaser/homeowner, some limitations may apply. See warranty certificate for complete details.



As an Energy Star® Partner, International Comfort Products has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

#### UNIT PERFORMANCE DATA

Model Number	COOLING		HEAT PUMP HEATING			GAS HEATING			Unit Dimensions H x W x L **	Operating Weight
	Nominal Capacity (BTU/h)	S.E.E.R	High Capacity (BTU/h)	HSPF	Low Capacity (BTU/h)	High Input (BTU/h)	Low Input (BTU/h)	Efficiency (AFUE%)		
PDX424040K0*A	23,000	14.5	22,000	7.8	12,200	40,000	28,000	78.2	32-1/2 X 47-5/16 X 47-5/16	440
PDX430060K0*A	29,000	14.5	28,000	7.8	15,200	60,000	42,000	78.0	32-1/2 X 47-5/16 X 47-5/16	440
PDX436080K0*A	34,400	14.5	34,000	8.0	18,400	80,000	56,000	78.5	36 X 47-5/16 X 73	482
PDX442080K0*A	41,000	14.5	41,000	8.0	22,000	80,000	56,000	78.5	36 X 47-5/16 X 73	608
PDX448100K0*A	46,000	14.5	46,000	8.0	25,200	100,000	70,000	78.6	42 X 47-5/16 X 73	649
PDX460100K0*A	58,000	14.5	57,000	8.0	32,400	100,000	70,000	78.6	42 X 47-5/16 X 73	674

\* 0 = Standard Model, 1 = Low NOx California Model

\*\* See unit dimensional drawing for mm.

## UNIT SPECIFICATIONS

MODEL NUMBER	Electrical Data 208/230-1-60		Condenser Data									Sound Ratings (dBa)
	Maximum HACR Brkr or Fuse	Minimum Circuit Ampacity	Coil			Fan Motor			Fan			
			Total Face Area (Ft <sup>2</sup> )	Fins Per Inch / Rows	Tube Dia. (In.)	Horse Power	Full Load Amps	Locked Rotor Amps	Size Diameter (inch)	RPM Max.	CFM (Max.)	
PDX424040	30 amps	21.8	11.40	18 / 2	3/8	1/8	0.9	1.6	20	825	2100	71
PDX430060	35 amps	22.8	11.46	18 / 2	3/8	1/8	0.9	1.6	20	825	2100	71
PDX436080	45 amps	29.7	12.99	18 / 2	3/8	1/8	0.9	1.7	20	1100	2600	73
PDX442080	45 amps	30.5	17.12	18 / 2	3/8	1/8	0.9	1.7	22	1100	3100	78
PDX448100	60 amps	38.0	20.14	18 / 2	3/8	1/4	1.4	3.2	22	1100	3400	77
PDX460100	60 amps	44.8	20.14	18 / 2	3/8	1/4	1.4	3.2	22	1100	3400	77

MODEL NUMBER	Evaporator Coil										Refrigerant Charge R410 (lbs)	Shipping Weight (lbs)
	Coil			Motor		Blower			Compressor			
	Total Face Area (Ft <sup>2</sup> )	Fins Per Inch / Rows	Tube Diameter (inch)	Horse Power	full Load Amps	Size	RPM (Max.)	CFM Rated	Rated Load Amps	Locked Rotor Amps		
PDX424040	3.56	14 / 4	3/8	1/2	4.3	10 x 8	1260	800	13.3	52	10.50	450
PDX430060	3.56	14 / 4	3/8	1/2	4.3	10 x 8	1260	875	14.1	70	10.75	450
PDX436080	6.17	14 / 3	3/8	1/2	4.3	11 x 9	1260	1200	19.6	82	11.75	492
PDX442080	6.17	14 / 3	3/8	3/4	6.8	11 x 9	1260	1400	18.2	96	14.50	618
PDX448100	6.17	14 / 3	3/8	3/4	6.8	11 x 10	1260	1600	23.8	96	15.00	659
PDX460100	9.76	14 / 3	3/8	1.0	9.1	11 x 10	1260	1750	27.4	118	16.00	684

## PERFORMANCE DATA: COOLING & HEAT PUMP HEATING

MODEL NUMBER	Cooling Data			Heating Data						Evaporator Rated Airflow (SCFM)
	Rated Capacity <sup>1</sup> BTU/h Cooling	S.E.E.R.	E.E.R.	Rated Capacity <sup>1</sup> BTU/h @ 47° F	Rated Capacity BTU/h@ 17° F	HSPF	S / T Ratio	COP		
								@ 47° F	17° F	
PDX424040	23,000	14.5	11.0	22,000	12,200	7.8	.73	3.0	2.2	800
PDX430060	29,000	14.5	11.0	28,000	15,200	7.8	.73	3.3	2.2	1000
PDX436080	34,400	14.5	11.0	34,000	18,400	8.0	.73	3.5	2.4	1200
PDX442080	41,000	14.5	11.0	41,000	22,000	8.0	.73	3.6	2.3	1400
PDX448100	46,000	14.5	11.0	46,000	25,200	8.0	.73	3.3	2.3	1600
PDX460100	58,000	14.5	11.0	57,000	32,400	8.0	.73	3.4	2.4	1750

<sup>1</sup> Rated Capacity at 230 Volts. For applications at 208 volts deduct 1000 BTU/h.

## PERFORMANCE DATA: GAS HEATING

MODEL NUMBER	Gas Heating Data		
	Input High Stage BTU/h	Input Low Stage BTU/h	AFUE (%)
PDX424040	40,000	28,000	78.2
PDX430060	60,000	42,000	78.0
PDX436080	80,000	56,000	78.5
PDX442080	80,000	56,000	78.5
PDX448100	100,000	70,000	78.6
PDX460100	100,000	70,000	78.6

**PDX4 SERIES AIRFLOW CHART**

Model	Cooling Tons	High Stage Gas Heating						Low Stage Gas Heating						High Stage Cooling		Low Stage Cooling		
		Heating Input (BTU/hr)	Heating Rise Range (°F)	Speed Tap	External Static Pressure (in. w.c.)		Heating Input (BTU/hr)	Heating Rise Range (°F)	Speed Tap	External Static Pressure (in. w.c.)		Normal Mode (CFM)	Dehumidify Mode (CFM)	Normal Mode (CFM)	Dehumidify Mode (CFM)			
					1" - 7"					1" - 7"								
					CFM	Heating Rise (°F)				CFM	Heating Rise (°F)							
PDX424040	2	40000	35 - 65	HI	904	33	28000	25 - 55	HI	800	26	800	640	560	448			
				MED HI	791	37			MED HI	700	30					MED HI	700	30
				MED LO	678	44			MED LO	600	35					MED LO	490	42
PDX424060	2	60000	35 - 65	LO*	554	52	42000	25 - 55	LO*	490	42	800	640	560	448			
				HI*	904	49			HI*	800	39					HI*	800	39
				MED HI	791	56			MED HI	700	44					MED HI	700	44
PDX430040	2.5	40000	35 - 65	MED LO	678	66	28000	25 - 55	MED LO	610	34	875	700	648	518			
				LO*	554	52			LO*	490	42					LO*	490	42
				HI*	904	49			HI*	800	39					HI*	800	39
PDX430060	2.5	60000	35 - 65	MED HI	791	56	42000	25 - 55	MED HI	700	44	875	700	648	518			
				MED LO	689	64			MED LO	610	51					MED LO	610	51
				LO	554	NA			LO	490	NA					LO	490	NA
PDX436060	3	60000	35 - 65	HI	1288	35	42000	25 - 55	HI	1140	27	1200	960	852	682			
				MED HI	1164	38			MED HI	1030	30					MED HI	1030	30
				MED LO	1034	43			MED LO	915	34					MED LO	915	34
PDX436080	3	80000	35 - 65	LO*	904	49	56000	25 - 55	LO*	800	39	1200	960	852	682			
				HI*	1288	48			HI*	1140	38					HI*	1140	38
				MED HI	1164	53			MED HI	1030	42					MED HI	1030	42
PDX442080	3.5	80000	35 - 65	MED LO	1034	59	56000	25 - 55	MED LO	915	47	1400	1120	980	784			
				LO*	904	49			LO*	800	39					LO*	800	39
				HI*	1288	48			HI*	1140	38					HI*	1140	38
PDX448100	4	100000	35 - 65	MED HI	1719	45	70000	25 - 55	MED HI	1521	35	1600	1280	1104	883			
				MED LO	1653	46			MED LO	1463	36					MED LO	1463	36
				LO*	1588	48			LO*	1405	38					LO*	1405	38
PDX448120	4	120000	35 - 65	HI*	1785	51	84000	25 - 55	HI*	1580	39	1600	1280	1104	883			
				MED HI	1719	53			MED HI	1521	41					MED HI	1521	41
				MED LO	1653	55			MED LO	1463	43					MED LO	1463	43
PDX460100	5	100000	35 - 65	LO	1588	57	70000	25 - 55	LO	1405	44	1750	1400	1295	1036			
				HI	1797	43			HI	1590	34					HI	1590	34
				MED HI	1732	44			MED HI	1533	35					MED HI	1533	35
PDX460120	5	120000	35 - 65	MED LO	1669	46	84000	25 - 55	MED LO	1477	36	1750	1400	1295	1036			
				LO*	1605	48			LO*	1420	38					LO*	1420	38
				HI*	1797	51			HI*	1590	40					HI*	1590	40
				MED HI	1732	53	84000	25 - 55	MED HI	1533	41	1750	1400	1295	1036			
				MED LO	1669	55			MED LO	1477	43					MED LO	1477	43
				LO	1605	57			LO	1420	44					LO	1420	44

NOTES:

- \* Factory-shipped speed
- NA = Not Allowed for Heating Speed

EXPANDED PERFORMANCE DATA

		P×X424 (High Stage Cooling)																					
		75						85						105						115			
CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb																					
		Entering Indoor Temperature - Degrees F, Wet Bulb																					
720	MBH†	22.16	22.85	23.34	23.79	25.10	27.60	29.09	30.58	32.07	33.56	35.05	36.54	38.03	39.52	41.01	42.50	43.99	45.48				
	S/F‡	1.00	0.86	0.69	0.52	0.35	0.18	0.01	-0.16	-0.33	-0.50	-0.67	-0.84	-1.01	-1.18	-1.35	-1.52	-1.69	-1.86				
	AMPS*	7.00	7.04	7.06	7.17	7.32	7.47	7.62	7.77	7.92	8.07	8.22	8.37	8.52	8.67	8.82	8.97	9.12	9.27				
	HI PR	282	284	285	288	293	293	326	327	328	331	336	342	347	353	358	364	369	375	381			
	LO PR	129	133	135	145	159	161	147	137	137	141	141	147	153	159	164	169	174	179	184			
800	MBH†	22.99	23.33	23.79	25.57	28.09	28.09	22.08	22.20	22.62	24.32	26.73	29.14	31.55	33.96	36.37	38.78	41.19	43.60				
	S/F‡	1.00	0.90	0.72	0.49	0.22	0.05	-0.12	-0.29	-0.46	-0.63	-0.80	-0.97	-1.14	-1.31	-1.48	-1.65	-1.82	-1.99				
	AMPS*	7.09	7.11	7.14	7.25	7.39	7.52	7.65	7.79	7.92	8.05	8.18	8.31	8.44	8.57	8.70	8.83	8.96	9.09				
	HI PR	284	285	286	289	294	294	327	327	328	332	337	343	348	354	359	364	370	375	381			
	LO PR	134	136	138	148	162	162	137	138	140	141	147	153	159	164	169	174	179	184	189			
880	MBH†	23.72	23.77	24.15	25.95	28.50	28.50	22.76	22.76	22.95	24.66	27.09	29.50	31.91	34.32	36.73	39.14	41.55	43.96				
	S/F‡	1.00	0.99	0.74	0.51	0.24	0.07	-0.10	-0.27	-0.44	-0.61	-0.78	-0.95	-1.12	-1.29	-1.46	-1.63	-1.80	-1.97				
	AMPS*	7.19	7.19	7.21	7.32	7.46	7.59	7.72	7.85	7.98	8.11	8.24	8.37	8.50	8.63	8.76	8.89	9.02	9.15				
	HI PR	286	286	287	290	295	295	329	329	329	333	338	344	349	354	359	364	370	375	381			
	LO PR	138	139	140	151	165	165	142	142	142	142	142	142	142	142	142	142	142	142	142			
P×X424 (Low Stage Cooling)																							
		Outdoor Ambient Temperature - Degrees F, Dry Bulb																					
		Entering Indoor Temperature - Degrees F, Wet Bulb																					
500	MBH†	15.83	16.66	17.10	18.61	20.78	21.78	15.15	15.75	16.17	17.64	19.75	21.75	23.75	25.75	27.75	29.75	31.75	33.75				
	S/F‡	1.00	0.85	0.69	0.49	0.28	0.07	-0.14	-0.31	-0.48	-0.65	-0.82	-0.99	-1.16	-1.33	-1.50	-1.67	-1.84	-2.01				
	AMPS*	4.88	4.91	4.92	4.96	5.01	5.01	5.57	5.60	5.62	5.68	5.75	5.82	5.89	5.96	6.03	6.10	6.17	6.24				
	HI PR	271	273	274	278	282	282	313	315	316	320	325	325	360	361	363	367	372	377	382			
	LO PR	127	132	135	144	157	157	131	135	137	147	160	163	165	167	169	171	173	175	177			
550	MBH†	16.48	17.06	17.49	19.04	21.24	21.24	15.76	16.11	16.53	18.03	20.17	22.17	24.17	26.17	28.17	30.17	32.17	34.17				
	S/F‡	1.00	0.88	0.70	0.67	0.50	0.32	0.14	-0.04	-0.22	-0.40	-0.58	-0.76	-0.94	-1.12	-1.30	-1.48	-1.66	-1.84				
	AMPS*	4.94	4.96	4.97	5.01	5.05	5.05	5.64	5.66	5.67	5.73	5.79	5.85	5.91	5.97	6.03	6.09	6.15	6.21				
	HI PR	273	274	275	279	283	283	315	316	317	321	326	326	362	363	364	368	373	378	383			
	LO PR	132	135	138	147	161	161	135	137	140	150	163	163	163	163	163	163	163	163	163			
600	MBH†	17.07	17.40	17.83	19.39	21.63	21.63	16.32	16.44	16.83	18.35	20.52	22.52	24.52	26.52	28.52	30.52	32.52	34.52				
	S/F‡	1.00	0.91	0.72	0.69	0.51	0.33	0.15	-0.03	-0.21	-0.39	-0.57	-0.75	-0.93	-1.11	-1.29	-1.47	-1.65	-1.83				
	AMPS*	5.00	5.01	5.02	5.06	5.09	5.11	5.73	5.71	5.73	5.78	5.84	5.84	6.50	6.50	6.51	6.59	6.68	6.77				
	HI PR	274	275	276	279	284	284	317	317	318	322	327	327	364	364	365	369	374	379	384			
	LO PR	136	138	140	150	163	163	139	140	142	152	165	165	165	165	165	165	165	165	165			

† Total capacities are net (I.D blower heat subtracted).

\* System amps are total of indoor and outdoor amps

‡ S/F† are based on 80° F db entering air at the indoor coil. For sensible capacities at other than 80° F db, deduct 835 BTU/h per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80° F, or add 835 BTU/h per 1000 cfm of indoor coil air to (MBh x S/T) for each degree above 80° F

†† All TVA rating indoor condition (75° F db/ 63° F wb). All other indoor air temperatures are at 80° F db

**EXPANDED PERFORMANCE DATA**

P-X430 (High Stage Cooling)		Outdoor Ambient Temperature - Degrees F, Dry Bulb																									
CFM		75					85					95					105					115					
		57	62	63††	67	72	57	62	63††	67	72	57	62	63††	67	72	57	62	63††	67	72	57	62	63††	67	72	
		63††	67	72	77	82	63††	67	72	77	82	63††	67	72	77	82	63††	67	72	77	82	63††	67	72	77	82	
787	MBH†	27.07	28.40	29.01	31.13	34.12	26.05	27.07	27.65	29.67	32.51	24.95	25.67	26.21	28.12	30.82	23.78	24.19	24.68	26.48	29.03	22.50	22.62	23.05	24.73	27.11	
	S/T†	1.00	0.86	0.70	0.67	0.50	1.00	0.88	0.71	0.68	0.51	1.00	0.90	0.72	0.69	0.52	1.00	0.93	0.74	0.71	0.52	1.00	0.96	0.76	0.73	0.54	
	AMPS*	8.88	8.96	8.99	9.13	9.31	9.86	9.93	9.96	10.10	10.30	10.94	11.00	11.00	11.18	11.39	12.16	12.20	12.23	12.39	12.60	13.54	13.55	13.58	13.74	13.96	
	HI PR	296	300	301	306	313	340	343	345	350	357	389	391	392	398	406	442	443	444	450	458	499	500	501	501	507	515
	LO PR	121	127	129	139	153	124	129	131	141	155	127	131	133	144	157	131	133	136	146	160	135	136	138	149	163	
875	MBH†	28.11	29.01	29.60	31.74	34.76	27.02	27.62	28.17	30.21	33.09	25.85	26.17	26.67	29.00	31.32	24.60	24.66	25.08	26.90	29.46	23.25	23.25	23.39	25.08	27.48	
	S/T†	1.00	0.89	0.72	0.69	0.51	1.00	0.91	0.73	0.70	0.52	1.00	0.94	0.75	0.72	0.53	1.00	0.99	0.77	0.74	0.54	1.00	1.00	0.79	0.77	0.55	
	AMPS*	9.02	9.08	9.11	9.25	9.44	10.01	10.05	10.08	10.22	10.42	11.10	11.12	11.15	11.30	11.51	12.32	12.32	12.35	12.51	12.72	13.70	13.69	13.70	13.86	14.08	
	HI PR	299	301	302	308	315	343	345	346	352	359	392	393	394	400	407	445	445	446	452	460	502	502	502	508	516	
	LO PR	126	130	132	142	156	129	132	134	144	158	132	134	136	146	160	136	137	138	149	163	140	140	141	151	165	
962	MBH†	29.01	29.51	30.07	32.23	35.27	27.86	28.10	28.59	30.64	33.54	26.63	26.64	27.04	28.98	31.72	25.31	25.31	25.40	27.22	29.80	23.89	23.89	23.66	25.36	27.77	
	S/T†	1.00	0.93	0.74	0.71	0.52	1.00	0.95	0.75	0.73	0.53	1.00	1.00	0.77	0.75	0.54	1.00	1.00	0.80	0.77	0.55	1.00	1.00	0.82	0.80	0.57	
	AMPS*	9.16	9.19	9.22	9.36	9.55	10.15	10.16	10.19	10.34	10.54	11.24	11.24	11.27	11.42	11.62	12.46	12.46	12.46	12.62	12.84	13.84	13.84	13.81	13.97	14.19	
	HI PR	301	303	304	309	316	346	346	347	353	361	394	394	395	401	409	447	447	447	453	461	505	505	504	509	517	
	LO PR	130	133	135	145	159	134	135	137	147	161	137	137	139	149	163	141	141	141	151	165	145	145	144	144	154	168

P-X430 (Low Stage Cooling)		Outdoor Ambient Temperature - Degrees F, Dry Bulb																								
CFM		75					85					95					105					115				
		57	62	63††	67	72	57	62	63††	67	72	57	62	63††	67	72	57	62	63††	67	72	57	62	63††	67	72
		63††	67	72	77	82	63††	67	72	77	82	63††	67	72	77	82	63††	67	72	77	82	63††	67	72	77	82
580	MBH†	18.92	20.33	20.85	22.65	25.21	18.22	19.37	19.87	21.60	24.06	17.45	18.34	18.81	20.46	22.82	16.62	17.22	17.67	19.24	21.49	15.72	16.03	16.45	17.94	20.07
	S/T†	1.00	0.90	0.73	0.70	0.53	1.00	0.92	0.75	0.71	0.54	1.00	0.94	0.76	0.73	0.54	1.00	0.97	0.78	0.74	0.55	1.00	1.01	0.80	0.76	0.56
	AMPS*	6.07	6.14	6.16	6.25	6.38	6.88	6.94	6.97	7.06	7.19	7.82	7.87	7.90	8.13	8.92	8.96	8.98	9.09	9.22	10.21	10.23	10.23	10.26	10.37	10.51
	HI PR	280	284	285	290	296	323	326	328	333	340	370	373	375	380	388	422	424	426	432	439	479	481	482	488	496
	LO PR	119	126	129	138	150	122	128	131	140	153	126	131	133	143	156	130	134	136	146	159	135	136	139	148	162
650	MBH†	19.87	20.94	21.47	23.31	25.94	19.12	19.93	20.43	22.20	24.71	18.30	18.84	19.31	21.00	23.40	17.41	17.68	18.11	19.72	22.01	16.44	16.46	16.83	18.35	20.51
	S/T†	1.00	0.93	0.75	0.72	0.54	1.00	0.96	0.77	0.73	0.55	1.00	0.98	0.78	0.75	0.55	1.00	1.01	0.81	0.77	0.56	1.00	1.00	0.83	0.80	0.58
	AMPS*	6.17	6.22	6.24	6.34	6.46	6.98	7.03	7.05	7.15	7.27	7.92	7.96	7.98	8.08	8.21	9.02	9.04	9.07	9.17	9.31	10.32	10.32	10.34	10.45	10.59
	HI PR	283	285	287	292	298	326	328	329	335	342	373	375	376	382	390	425	426	428	433	441	483	483	484	490	498
	LO PR	124	130	132	141	154	127	132	134	144	157	131	134	136	146	159	135	137	139	149	162	139	140	142	151	165
715	MBH†	20.67	21.43	21.94	23.82	26.49	19.86	20.37	20.86	22.66	25.21	18.99	19.25	19.69	21.41	23.85	18.05	18.07	18.45	20.08	22.39	17.03	17.03	17.12	18.66	20.85
	S/T†	1.00	0.96	0.77	0.74	0.55	1.00	0.99	0.79	0.76	0.56	1.00	1.02	0.81	0.77	0.57	1.00	1.00	0.83	0.80	0.58	1.00	1.00	0.86	0.82	0.59
	AMPS*	6.25	6.29	6.32	6.41	6.54	7.07	7.10	7.12	7.22	7.35	8.01	8.03	8.05	8.15	8.29	9.11	9.11	9.14	9.24	9.38	10.41	10.41	10.41	10.52	10.66
	HI PR	285	287	288	293	300	328	330	331	336	344	376	376	378	383	391	428	428	429	435	443	485	485	485	491	499
	LO PR	129	132	135	144	157	132	134	137	146	160	135	137	139	149	162	139	139	141	151	165	144	144	144	154	167

† Total capacities are net (I.D blower heat subtracted).

\* System amps are total of indoor and outdoor amps

† S/T are based on 80° F db entering air at the indoor coil. For sensible capacities at other than 80° F db, deduct 835 BTU/h per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80° F, or add 835 BTU/h per 1000 cfm of indoor coil air to (MBh x S/T) for each degree above 80° F

†† All TVA rating indoor condition (75° F db/ 63° F wb). All other indoor air temperatures are at 80° F db

EXPANDED PERFORMANCE DATA

		P-X436 (High Stage Cooling)																						
		Outdoor Ambient Temperature - Degrees F, Dry Bulb									Outdoor Ambient Temperature - Degrees F, Wet Bulb													
		75			85			95			105			115										
		Entering Indoor Temperature - Degrees F, Wet Bulb																						
CFM		57	62	63†	67	72	72	57	62	63†	67	72	72	57	62	63†	67	72	72	57	62	63†	67	72
1080	MBHT	33.33	34.47	35.23	38.02	41.96	39.85	30.49	30.85	31.49	34.04	37.65	37.65	28.95	28.98	29.50	31.92	35.36	27.31	27.31	27.31	27.41	29.69	32.94
	S/T†	1.00	0.86	0.69	0.66	0.49	0.68	0.50	0.91	0.72	0.69	0.51	1.00	1.00	1.00	0.74	0.71	0.52	1.00	1.00	1.00	0.77	0.74	0.53
	AMPS*	10.59	10.62	10.64	10.72	10.82	11.94	11.96	11.98	13.43	13.45	13.66	13.66	15.03	15.03	15.05	15.15	15.28	16.79	16.79	16.79	16.79	16.90	17.04
	HI PR	281	283	284	287	292	324	325	326	371	372	373	377	382	423	423	424	428	434	480	480	481	481	485
1200	LO PR	127	130	133	143	156	130	133	135	145	158	161	161	138	138	140	150	163	142	142	142	142	152	166
	MBHT	34.59	35.19	35.91	38.73	42.73	40.54	31.58	31.57	32.02	34.40	38.25	38.25	29.96	29.96	29.97	32.41	35.88	28.23	28.23	28.23	27.81	30.11	33.39
	S/T†	1.00	0.89	0.71	0.68	0.50	0.70	0.70	0.92	0.73	0.70	0.70	0.52	1.00	1.00	0.77	0.74	0.53	1.00	1.00	1.00	0.80	0.77	0.55
	AMPS*	10.74	10.76	10.78	10.85	10.95	12.09	12.10	12.12	13.57	13.57	13.58	13.79	15.19	15.19	15.19	15.29	15.41	16.95	16.95	16.95	16.93	17.04	17.17
1320	HI PR	283	284	285	288	293	326	326	327	373	374	378	383	425	425	425	429	435	482	482	482	481	486	491
	LO PR	131	133	135	145	159	135	136	138	148	161	161	138	142	142	142	152	166	147	147	147	144	155	168
	MBHT	35.70	35.85	36.45	39.31	43.36	41.10	32.53	32.53	32.46	35.05	38.74	38.74	30.83	30.83	30.35	32.80	36.30	29.02	29.02	29.02	28.14	30.45	33.74
	S/T†	1.00	0.93	0.73	0.71	0.51	0.73	0.73	0.95	0.75	0.73	0.73	0.54	1.00	1.00	0.80	0.77	0.55	1.00	1.00	1.00	0.83	0.80	0.56
1320	AMPS*	10.89	10.89	10.91	10.98	11.08	12.24	12.24	12.24	12.25	12.33	12.44	13.72	15.34	15.34	15.34	15.42	15.54	17.11	17.11	17.11	17.06	17.17	17.30
	HI PR	284	285	285	289	294	328	328	328	375	375	379	384	427	427	426	430	436	484	484	484	482	486	492
	LO PR	136	136	138	148	161	139	139	144	150	163	163	143	143	146	144	154	168	151	151	151	146	157	170
		P-X436 (Low Stage Cooling)																						
		Outdoor Ambient Temperature - Degrees F, Dry Bulb									Outdoor Ambient Temperature - Degrees F, Wet Bulb													
		75			85			95			105			115										
		Entering Indoor Temperature - Degrees F, Wet Bulb																						
CFM		57	62	63†	67	72	72	57	62	63†	67	72	72	57	62	63†	67	72	72	57	62	63†	67	72
770	MBHT	23.90	24.67	25.29	27.48	30.64	28.85	21.57	21.67	22.18	24.17	27.05	27.05	20.35	20.35	20.57	22.46	25.19	19.08	19.08	19.08	18.92	20.69	23.26
	S/T†	1.00	0.89	0.71	0.68	0.51	0.70	0.70	0.95	0.75	0.72	0.72	0.52	1.00	1.00	0.78	0.75	0.54	1.00	1.00	1.00	0.81	0.78	0.55
	AMPS*	6.27	6.09	5.96	5.43	4.69	7.66	7.45	7.45	9.17	9.17	9.07	8.60	7.95	10.87	10.87	10.84	10.40	9.77	12.75	12.75	12.81	12.40	11.81
	HI PR	272	273	274	276	279	316	316	363	363	364	367	371	417	417	417	420	424	477	477	477	476	480	484
850	LO PR	131	135	137	147	160	135	140	140	142	149	163	166	144	144	145	155	168	149	149	149	148	158	171
	MBHT	24.83	25.22	25.80	28.04	31.26	23.61	22.37	22.37	22.58	24.60	27.53	27.53	21.08	21.08	20.92	22.83	25.60	19.74	19.74	19.74	19.21	21.01	23.62
	S/T†	1.00	0.93	0.74	0.70	0.52	0.72	0.72	0.99	0.76	0.72	0.72	0.54	1.00	1.00	0.81	0.78	0.55	1.00	1.00	1.00	0.85	0.81	0.57
	AMPS*	6.11	6.02	5.89	5.35	4.60	7.52	7.40	7.40	9.06	9.06	8.56	7.88	10.76	10.76	10.82	10.37	9.73	12.66	12.66	12.66	12.80	12.38	11.78
940	HI PR	274	274	275	277	280	317	317	317	318	321	324	365	365	365	368	372	418	418	418	418	422	422	484
	LO PR	136	137	140	150	163	140	140	144	144	152	166	166	144	144	147	157	171	153	153	153	150	160	174
	MBHT	25.76	25.79	26.28	28.56	31.84	24.48	23.16	23.16	22.95	25.00	27.97	27.97	21.81	21.81	21.24	23.18	25.98	20.39	20.39	20.39	19.49	21.30	23.94
	S/T†	1.00	1.00	0.76	0.73	0.53	0.75	0.75	1.00	0.78	0.75	0.75	0.54	1.00	1.00	0.84	0.81	0.57	1.00	1.00	1.00	0.88	0.85	0.59
940	AMPS*	5.94	5.94	5.84	5.28	4.52	7.38	7.38	7.38	8.94	8.94	8.52	7.84	10.66	10.66	10.81	10.35	9.69	12.57	12.57	12.57	12.80	12.37	11.76
	HI PR	275	275	275	277	280	318	318	318	318	321	325	366	366	366	369	373	419	419	419	418	422	422	481
	LO PR	140	140	142	152	166	144	144	144	144	155	168	168	148	148	149	159	173	157	157	157	152	162	176

† Total capacities are net (I.D blower heat subtracted).

\* System amps are total of indoor and outdoor amps

‡ S/T are based on 80° F db entering air at the indoor coil. For sensible capacities at other than 80° F db, deduct 835 BTU/h per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80° F, or add 835 BTU/h per 1000 cfm of indoor coil air to (MBh x S/T) for each degree above 80° F

†† All TVA rating indoor condition (75° F db/ 63° F wb), All other indoor air temperatures are at 80° F db

**EXPANDED PERFORMANCE DATA**

CFM		P-X442 (High Stage Cooling)																	
		Outdoor Ambient Temperature - Degrees F, Dry Bulb									Outdoor Ambient Temperature - Degrees F, Wet Bulb								
		75			85			95			105			115					
		57	62	63††	67	72	72	57	62	63††	67	72	72	57	62	63††	67	72	72
		33.35	39.47	40.31	43.44	47.86	36.97	37.72	38.49	39.49	41.49	45.73	35.47	35.85	36.55	39.41	43.45	33.85	33.90
		1.00	0.86	0.69	0.67	0.49	1.00	0.88	0.71	0.68	0.50	0.50	1.00	0.91	0.72	0.69	0.51	1.00	0.99
1260		12.77	12.83	12.86	13.03	13.25	14.02	14.06	14.10	14.27	14.50	15.39	15.41	15.44	15.85	16.89	16.92	17.10	17.35
		286	287	288	293	299	329	330	331	336	342	376	377	378	383	390	429	434	441
		126	129	132	141	154	129	131	133	143	156	132	133	135	145	159	136	137	141
		39.73	40.27	41.02	44.19	48.68	38.26	38.47	39.13	42.16	46.46	36.68	36.66	37.11	41.00	44.09	34.96	37.69	41.56
1400		1.00	0.90	0.72	0.69	0.51	1.00	0.92	0.73	0.70	0.51	1.00	1.00	0.75	0.72	0.52	1.00	1.00	0.83
		13.00	13.02	13.06	13.22	13.45	14.25	14.26	14.29	14.46	14.69	15.61	15.61	15.63	15.81	16.05	17.12	17.12	17.54
		288	289	289	294	300	331	332	332	337	344	379	379	379	384	391	431	431	443
		131	132	134	144	157	133	134	136	146	159	137	137	138	148	161	140	140	144
		40.94	41.01	41.59	44.80	49.33	39.39	39.39	39.64	42.70	47.04	37.72	37.72	37.57	40.48	44.60	35.92	38.10	42.00
1540		1.00	0.93	0.74	0.71	0.52	1.00	1.00	0.76	0.73	0.53	1.00	1.00	0.77	0.75	0.54	1.00	1.00	0.85
		13.21	13.22	13.24	13.41	13.64	14.47	14.47	14.47	14.65	14.88	15.83	15.83	15.82	15.99	16.24	17.34	17.34	17.72
		290	290	290	295	301	333	333	333	338	345	381	381	380	385	392	433	433	444
		135	135	136	146	160	138	138	138	148	162	141	141	140	150	163	144	144	152

CFM		P-X442 (Low Stage Cooling)																	
		Outdoor Ambient Temperature - Degrees F, Dry Bulb									Outdoor Ambient Temperature - Degrees F, Wet Bulb								
		75			85			95			105			115					
		57	62	63††	67	72	72	57	62	63††	67	72	72	57	62	63††	67	72	72
		27.85	28.86	29.57	32.11	35.76	26.83	27.53	28.19	28.75	30.64	34.15	25.73	26.10	26.71	29.06	32.43	24.53	24.59
		1.00	0.91	0.73	0.69	0.52	1.00	0.93	0.74	0.71	0.52	1.00	0.95	0.76	0.72	0.53	1.00	0.99	0.99
880		8.67	8.66	8.65	8.63	8.61	9.64	9.63	9.62	9.58	9.54	10.73	10.72	10.71	10.65	10.59	11.98	11.98	11.98
		272	274	275	279	284	315	316	317	321	327	362	363	364	368	374	414	414	414
		129	133	135	145	158	132	135	137	147	160	135	137	139	149	162	139	139	143
		28.96	29.51	30.18	32.78	36.50	27.88	28.14	28.75	31.25	34.83	26.71	26.70	27.22	29.60	33.03	25.44	25.44	25.44
975		1.00	0.94	0.75	0.72	0.53	1.00	0.96	0.76	0.73	0.53	1.00	1.00	0.78	0.75	0.54	1.00	1.00	0.85
		8.74	8.74	8.73	8.71	8.69	9.70	9.70	9.69	9.65	9.61	10.79	10.79	10.78	10.72	10.66	12.03	12.03	12.03
		274	275	276	280	285	317	317	318	322	328	364	364	365	369	375	416	416	416
		134	136	138	148	161	137	138	140	149	163	140	140	142	151	165	143	143	148
		30.00	30.13	30.72	33.36	37.15	28.86	28.86	29.24	31.77	35.41	27.62	27.62	27.65	30.07	33.55	26.28	26.28	26.28
1075		1.00	0.98	0.77	0.74	0.54	1.00	1.00	0.79	0.76	0.55	1.00	1.00	0.81	0.78	0.56	1.00	1.00	0.84
		8.82	8.82	8.81	8.79	8.77	9.78	9.78	9.77	9.73	9.69	10.85	10.85	10.85	10.80	10.74	12.09	12.09	12.09
		276	276	277	281	286	319	319	319	323	329	366	366	366	370	376	418	418	418
		138	138	140	150	163	141	141	142	152	165	144	144	144	144	154	148	148	148

† Total capacities are net (I.D blower heat subtracted).

\* System amps are total of indoor and outdoor amps

† S/T are based on 80° F db entering air at the indoor coil. For sensible capacities at other than 80° F db, deduct 835 BTU/h per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80° F, or add 835 BTU/h per 1000 cfm of indoor coil air to (MBh x S/T) for each degree above 80° F

†† All TVA rating indoor condition (75° F db/ 63° F wb). All other indoor air temperatures are at 80° F db

EXPANDED PERFORMANCE DATA

		P*X448 (High Stage Cooling)																						
		Outdoor Ambient Temperature - Degrees F, Dry Bulb							Outdoor Ambient Temperature - Degrees F, Wet Bulb															
		85					95					105				115								
		Entering Indoor Temperature - Degrees F, Wet Bulb																						
CFM		57	62	63†	67	72	72	57	62	63†	67	72	72	57	62	63†	67	72	72	57	62	63†	67	72
1440	MBHT	44.14	45.41	46.32	49.97	55.13	42.56	43.42	44.24	47.74	52.67	40.84	41.29	42.01	45.34	50.05	38.97	39.05	39.60	42.76	47.22	36.91	37.01	39.98
	S/T†	1.00	0.87	0.69	0.67	0.49	1.00	0.88	0.71	0.68	0.50	1.00	0.91	0.72	0.69	0.51	1.00	0.93	0.74	0.71	0.52	1.00	0.76	0.74
	AMPS*	14.79	14.86	14.90	15.09	15.35	16.17	16.22	16.26	16.46	16.72	17.68	17.70	17.74	17.94	18.22	19.33	19.34	19.37	19.58	19.87	21.18	21.18	21.39
	HI PR	288	290	291	296	302	331	333	334	339	346	379	380	381	386	393	431	431	432	437	445	487	487	493
	LO PR	127	130	132	142	155	130	132	134	144	157	133	135	136	146	160	137	137	139	149	162	141	141	151
1600	MBHT	45.70	46.32	47.11	50.81	56.03	44.02	44.30	44.95	48.49	53.49	42.20	42.16	42.64	46.00	50.77	40.22	40.22	40.16	43.34	47.84	38.05	37.49	40.48
	S/T†	1.00	0.90	0.72	0.69	0.51	1.00	0.92	0.73	0.70	0.51	1.00	1.00	0.75	0.72	0.52	1.00	1.00	0.77	0.74	0.53	1.00	0.80	0.77
	AMPS*	15.07	15.10	15.14	15.33	15.60	16.45	16.47	16.50	16.70	16.97	17.96	17.96	17.98	18.18	18.46	19.62	19.62	19.61	19.82	20.11	21.46	21.42	21.63
	HI PR	290	291	292	297	303	334	334	335	340	347	381	381	382	387	395	433	433	433	439	446	490	489	494
	LO PR	131	133	135	145	158	134	135	137	147	160	138	138	139	149	162	142	142	141	151	165	146	143	153
1760	MBHT	47.06	47.19	47.74	51.48	56.76	45.29	45.28	45.52	49.08	54.14	43.38	43.37	43.15	46.53	51.33	41.30	41.30	40.61	43.81	48.33	39.03	37.88	40.88
	S/T†	1.00	0.93	0.74	0.71	0.52	1.00	1.00	0.75	0.73	0.53	1.00	1.00	0.77	0.75	0.54	1.00	1.00	0.80	0.77	0.55	1.00	0.83	0.80
	AMPS*	15.34	15.35	15.37	15.57	15.84	16.72	16.72	16.73	16.93	17.21	18.23	18.23	18.21	18.42	18.70	19.89	19.89	19.84	20.05	20.34	21.74	21.74	21.86
	HI PR	292	292	293	298	304	336	336	336	341	348	384	384	383	388	396	435	435	434	440	447	492	490	495
	LO PR	135	136	137	147	160	138	138	139	149	162	142	142	141	151	164	145	145	143	153	167	149	145	155
		P*X448 (Low Stage Cooling)																						
		Outdoor Ambient Temperature - Degrees F, Dry Bulb							Outdoor Ambient Temperature - Degrees F, Wet Bulb															
		85					95					105				115								
		Entering Indoor Temperature - Degrees F, Wet Bulb																						
CFM		57	62	63†	67	72	72	57	62	63†	67	72	72	57	62	63†	67	72	72	57	62	63†	67	72
1000	MBHT	30.91	32.03	32.78	35.65	39.76	29.79	30.56	31.26	34.02	37.97	28.57	28.99	29.62	32.26	36.05	27.23	27.32	27.85	30.37	33.99	25.76	25.94	28.32
	S/T†	1.00	0.91	0.73	0.70	0.52	1.00	0.93	0.74	0.71	0.52	1.00	0.95	0.76	0.73	0.53	1.00	0.98	0.78	0.75	0.54	1.00	0.80	0.77
	AMPS*	9.66	9.65	9.64	9.62	9.61	10.79	10.78	10.77	10.73	10.69	12.06	12.05	12.04	11.98	11.91	13.52	13.52	13.50	13.42	13.33	15.22	15.22	14.99
	HI PR	273	275	276	280	285	316	317	318	323	328	363	364	365	369	376	415	415	416	421	427	472	472	477
	LO PR	129	133	135	145	157	132	135	137	147	160	136	136	137	139	149	162	139	140	142	151	165	144	154
1100	MBHT	32.04	32.70	33.40	36.32	40.51	30.85	31.19	31.82	34.62	38.65	29.56	29.62	30.12	32.80	36.66	28.15	28.15	28.29	30.85	34.52	26.61	26.32	28.73
	S/T†	1.00	0.94	0.75	0.72	0.53	1.00	0.96	0.76	0.73	0.53	1.00	0.99	0.78	0.75	0.54	1.00	1.00	0.81	0.77	0.55	1.00	0.83	0.80
	AMPS*	9.76	9.76	9.75	9.74	9.72	10.89	10.88	10.88	10.84	10.80	12.15	12.15	12.14	12.08	12.02	13.60	13.60	13.60	13.52	13.43	15.30	15.31	15.09
	HI PR	275	276	277	281	286	318	318	319	324	330	365	365	366	370	377	417	417	417	422	428	474	474	478
	LO PR	133	135	137	147	160	136	138	139	149	162	140	140	141	151	165	144	144	144	154	167	148	146	156
1200	MBHT	33.06	33.31	33.91	36.88	41.14	31.81	32.28	32.82	35.13	39.21	30.45	30.45	30.54	33.25	37.16	28.97	28.97	28.66	31.24	34.95	27.36	26.64	29.08
	S/T†	1.00	0.97	0.77	0.74	0.54	1.00	1.00	0.79	0.75	0.55	1.00	1.00	0.81	0.77	0.56	1.00	1.00	0.83	0.80	0.57	1.00	0.86	0.83
	AMPS*	9.87	9.87	9.87	9.85	9.84	10.99	10.98	10.98	10.95	10.91	12.24	12.24	12.24	12.19	12.13	13.69	13.69	13.70	13.63	13.54	15.38	15.41	15.31
	HI PR	277	277	278	282	287	320	319	320	325	331	367	367	367	371	378	419	419	418	423	429	476	476	479
	LO PR	137	138	139	149	162	140	140	141	151	165	143	143	143	153	167	147	147	146	156	169	151	148	158

† Total capacities are net (I.D blower heat subtracted).

\* System amps are total of indoor and outdoor amps

‡ S/T are based on 80° F db entering air at the indoor coil. For sensible capacities at other than 80° F db, deduct 835 BTU/h per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80° F, or add 835 BTU/h per 1000 cfm of indoor coil air to (MBh x S/T) for each degree above 80° F

†† All TVA rating indoor condition (75° F db/ 63° F wb). All other indoor air temperatures are at 80° F db





# HEAT PUMP HEATING EXPANDED PERFORMANCE DATA

## P\*X424 (HIGH CAPACITY)

CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
720	MBh†	2.17	4.78	8.67	12.17	13.78	18.08	21.29	23.36	24.21	26.71
	T/R	11.70	14.40	18.20	21.20	22.40	23.80	23.50	23.20	23.10	22.30
	AMPS*	4.24	5.23	6.27	7.12	7.48	8.39	9.13	9.62	9.82	10.48
	HI PR	243	250	264	275	279	320	360	388	387	383
	LO PR	30	41	53	61	65	81	98	109	109	107
800	MBh†	2.10	4.71	8.71	12.20	13.65	17.18	20.14	22.00	22.75	25.38
	T/R	10.20	12.70	16.40	19.00	19.80	20.20	19.90	19.50	19.40	19.00
	AMPS*	4.24	5.22	6.24	7.07	7.33	8.16	8.87	9.34	9.54	10.22
	HI PR	236	243	257	268	269	309	349	376	375	373
	LO PR	31	42	53	61	65	80	94	104	104	103
880	MBh†	2.12	4.79	8.79	12.09	13.49	16.52	19.29	21.05	22.13	24.27
	T/R	9.30	11.80	15.00	17.10	17.70	17.60	17.30	16.90	17.10	16.40
	AMPS*	4.24	5.18	6.19	6.96	7.27	8.00	8.70	9.17	9.41	10.05
	HI PR	233	241	253	260	264	303	341	368	367	365
	LO PR	31	42	52	61	64	78	92	101	102	100

## P\*X424 (LOW CAPACITY)

CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
500	MBh†	4.13	4.13	5.94	7.55	8.09	11.24	14.47	16.91	17.94	19.68
	T/R	9.90	9.90	14.00	17.50	18.60	25.50	32.40	37.50	39.60	42.50
	AMPS*	5.79	5.79	6.04	6.20	6.22	6.43	6.67	6.76	6.77	6.56
	HI PR	236	236	250	264	266	293	317	355	363	375
	LO PR	45	45	57	66	71	85	102	115	120	127
550	MBh†	3.83	3.83	6.31	8.00	8.49	11.28	14.62	16.80	17.34	17.71
	T/R	8.40	8.40	13.50	16.90	17.80	23.20	29.60	33.60	34.40	34.30
	AMPS*	5.73	5.73	5.98	6.00	6.16	6.29	6.50	6.49	6.45	5.97
	HI PR	230	230	249	260	265	283	306	341	345	342
	LO PR	45	45	56	65	71	85	102	114	116	116
600	MBh†	3.87	3.87	6.51	7.76	8.29	11.41	14.56	15.94	16.04	16.24
	T/R	7.70	7.70	12.70	14.90	15.80	21.40	26.90	29.00	28.90	28.50
	AMPS*	5.70	5.70	5.81	6.01	6.03	6.17	6.28	6.18	6.05	5.59
	HI PR	227	227	247	254	256	277	295	325	324	320
	LO PR	45	45	56	66	71	85	102	108	108	108

† Total capacities are net (I.D blower heat added) system capacities

\* System amps are total of indoor and outdoor amps

## HEAT PUMP HEATING EXPANDED PERFORMANCE DATA

P*X430 (HIGH CAPACITY)											
CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
787	MBh†	3.33	6.61	11.17	15.07	17.00	23.34	27.39	30.12	31.27	34.93
	T/R	13.70	17.40	21.70	24.80	26.30	30.00	30.00	29.90	29.80	29.50
	AMPS*	6.18	7.06	8.06	8.85	9.23	10.26	10.84	11.23	11.39	11.92
	HI PR	247	258	282	287	293	333	374	402	401	397
	LO PR	30	39	50	58	62	79	96	108	108	108
875	MBh†	3.50	6.61	11.20	15.20	16.97	21.88	25.56	28.00	29.00	32.15
	T/R	13.00	15.60	19.50	22.40	23.50	25.10	25.00	24.80	24.60	24.20
	AMPS*	6.09	7.10	8.02	8.80	9.10	9.88	10.44	10.81	10.96	11.46
	HI PR	247	251	266	279	282	320	358	384	383	379
	LO PR	28	39	50	58	62	77	91	102	102	101
962	MBh†	3.02	6.86	11.31	15.19	16.84	20.86	24.28	26.49	27.40	30.17
	T/R	10.10	14.70	17.90	20.30	21.10	21.60	21.40	21.20	21.00	20.50
	AMPS*	6.22	6.96	7.98	8.74	8.97	9.66	10.20	10.55	10.70	11.18
	HI PR	227	254	263	272	274	310	347	372	371	367
	LO PR	30	38	49	58	61	75	88	98	97	96
P*X430 (LOW CAPACITY)											
CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
580	MBh†	3.90	6.12	8.00	9.34	10.71	13.87	17.57	20.53	21.64	25.93
	T/R	8.40	12.90	16.40	18.90	21.50	27.40	34.20	39.60	41.60	49.20
	AMPS*	6.35	6.77	7.07	7.15	7.28	7.57	7.87	8.13	8.11	8.38
	HI PR	230	246	253	257	272	295	321	345	349	381
	LO PR	33	43	55	65	68	83	99	111	116	134
650	MBh†	3.97	5.74	8.03	10.00	11.28	14.05	17.82	20.40	21.51	23.15
	T/R	7.60	10.70	14.70	18.00	20.20	24.70	30.80	34.80	36.50	38.40
	AMPS*	6.32	6.71	6.96	7.08	7.07	7.36	7.62	7.64	7.69	7.43
	HI PR	227	238	252	262	272	285	311	323	331	338
	LO PR	33	44	55	64	67	83	98	110	115	120
715	MBh†	4.00	6.23	8.57	10.11	10.95	14.19	17.87	20.15	20.54	21.04
	T/R	7.00	10.60	14.20	16.50	17.70	22.60	27.90	31.10	31.40	31.40
	AMPS*	6.31	6.65	6.89	6.97	7.03	7.22	7.41	7.41	7.32	6.87
	HI PR	225	238	252	257	262	279	300	312	313	311
	LO PR	33	43	54	64	68	82	98	108	110	110

† Total capacities are net (I.D blower heat added) system capacities

\* System amps are total of indoor and outdoor amps

# HEAT PUMP HEATING EXPANDED PERFORMANCE DATA

## P\*X436 (HIGH CAPACITY)

CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
1080	MBh†	6.52	9.85	14.51	18.15	19.92	27.33	34.05	36.48	37.90	41.61
	T/R	12.20	14.80	18.30	20.60	21.70	26.30	29.30	29.10	29.40	29.30
	AMPS*	7.18	7.90	8.85	9.70	10.09	11.39	12.43	12.81	13.05	13.64
	HI PR	239	254	269	278	268	307	346	373	375	372
	LO PR	28	36	47	55	62	80	98	111	112	113
1200	MBh†	6.51	9.89	14.59	18.40	20.35	27.16	31.69	34.00	35.70	39.99
	T/R	10.90	13.40	16.50	18.80	19.90	23.40	24.30	24.20	24.70	25.20
	AMPS*	6.95	7.89	8.95	9.77	10.03	11.19	11.99	12.38	12.66	13.40
	HI PR	239	249	263	261	270	302	334	356	359	362
	LO PR	26	36	47	57	60	76	92	104	106	108
1320	MBh†	6.55	10.15	14.55	18.62	20.45	26.88	29.95	31.99	33.07	35.98
	T/R	10.00	12.50	15.00	17.20	18.10	21.00	20.80	20.60	20.60	20.40
	AMPS*	6.98	8.16	9.10	9.70	10.08	11.12	11.72	12.09	12.29	12.84
	HI PR	236	239	247	260	269	296	324	343	343	341
	LO PR	26	38	49	56	60	74	88	98	98	98

## P\*X436 (LOW CAPACITY)

CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
770	MBh†	5.70	5.94	8.45	11.82	11.70	15.26	20.99	23.54	25.80	31.91
	T/R	8.00	8.80	12.20	16.80	16.50	21.10	28.50	31.50	34.40	42.00
	AMPS*	6.90	6.55	7.09	7.33	7.44	7.73	8.33	8.40	8.85	9.45
	HI PR	230	231	242	262	253	265	307	303	333	358
	LO PR	42	43	57	63	70	85	98	113	117	137
850	MBh†	5.60	5.94	9.60	11.40	12.44	16.38	20.14	24.20	26.21	32.03
	T/R	7.80	8.00	12.60	14.70	15.90	20.50	24.60	29.30	31.50	37.90
	AMPS*	6.30	6.54	6.99	7.26	7.38	7.78	7.96	8.33	8.60	9.05
	HI PR	227	228	245	253	258	277	279	299	314	338
	LO PR	42	43	54	64	68	83	101	113	117	137
935	MBh†	5.50	6.02	8.71	11.49	11.44	16.56	20.64	24.80	26.53	31.66
	T/R	7.10	7.30	10.30	13.40	13.20	18.80	22.90	27.10	28.90	33.80
	AMPS*	6.52	6.56	7.06	7.27	7.32	7.69	7.92	8.32	8.48	8.80
	HI PR	221	226	236	246	239	271	275	301	308	325
	LO PR	41	43	57	64	70	83	101	111	117	135

† Total capacities are net (I.D blower heat added) system capacities

\* System amps are total of indoor and outdoor amps

## HEAT PUMP HEATING EXPANDED PERFORMANCE DATA

P*X442 (HIGH CAPACITY)											
CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
1260	MBh†	10.29	13.45	19.49	21.53	24.17	30.71	38.11	43.16	45.30	48.29
	T/R	10.50	13.00	18.00	19.20	21.30	25.90	30.90	34.10	35.40	36.10
	AMPS*	10.42	11.16	11.61	12.16	12.44	13.33	14.31	14.91	15.24	15.47
	HI PR	233	237	267	258	282	314	347	369	377	379
	LO PR	31	41	49	60	61	79	98	111	115	118
1400	MBh†	10.87	15.26	19.56	22.00	24.31	31.00	37.92	41.00	41.71	38.58
	T/R	10.00	13.30	16.20	17.60	19.20	23.40	27.50	28.90	29.00	25.50
	AMPS*	10.18	10.88	11.64	12.19	12.41	13.30	14.09	14.51	14.56	14.07
	HI PR	236	251	262	255	266	298	329	351	351	331
	LO PR	29	38	49	60	62	78	95	106	106	95
1540	MBh†	10.70	13.92	19.79	21.97	24.27	31.25	37.32	38.65	39.48	41.14
	T/R	8.90	11.00	14.90	15.90	17.40	21.40	24.50	24.50	24.70	24.70
	AMPS*	10.18	11.29	11.70	12.15	12.43	13.36	14.07	14.15	14.23	14.31
	HI PR	233	232	256	250	257	286	315	335	336	333
	LO PR	28	41	49	59	63	77	90	100	101	101
P*X442 (LOW CAPACITY)											
CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
875	MBh†	5.96	8.91	11.75	14.47	16.19	20.07	23.41	27.47	30.07	36.59
	T/R	8.10	11.80	15.20	18.40	20.50	24.90	28.50	33.10	36.10	43.40
	AMPS*	9.29	9.38	9.69	9.87	9.77	10.05	10.09	10.33	10.75	11.24
	HI PR	228	242	255	268	275	289	287	306	327	361
	LO PR	33	41	51	62	64	78	97	109	114	132
975	MBh†	6.06	8.68	11.47	14.60	15.68	19.91	23.91	28.60	30.42	36.48
	T/R	7.30	10.30	13.20	16.60	17.70	22.10	26.00	30.80	32.60	38.50
	AMPS*	9.31	9.56	9.69	9.79	9.86	10.06	9.97	10.41	10.56	10.76
	HI PR	225	233	239	261	266	283	281	311	322	339
	LO PR	33	44	55	61	65	80	97	108	112	132
1075	MBh†	6.15	9.13	12.66	14.86	15.83	19.23	25.05	28.87	30.73	35.42
	T/R	6.80	9.80	13.20	15.30	16.20	19.20	24.60	28.00	29.70	33.60
	AMPS*	9.33	9.36	9.49	9.73	9.79	9.76	10.08	10.28	10.41	10.50
	HI PR	223	234	247	256	260	258	286	303	309	324
	LO PR	33	41	52	61	65	82	96	107	112	127

† Total capacities are net (I.D blower heat added) system capacities

\* System amps are total of indoor and outdoor amps

## HEAT PUMP HEATING EXPANDED PERFORMANCE DATA

### P\*X448 (HIGH CAPACITY)

CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
1440	MBh†	14.06	18.13	22.73	24.98	28.87	34.28	38.56	46.55	49.30	57.58
	T/R	11.00	14.10	17.60	19.20	22.20	26.30	29.40	35.60	37.70	44.00
	AMPS*	11.57	12.50	13.46	13.92	14.57	15.44	16.28	17.71	18.28	19.79
	HI PR	241	255	271	258	295	307	327	357	366	400
	LO PR	31	41	52	62	63	78	92	106	111	131
1600	MBh†	12.45	16.75	21.36	25.20	29.11	34.90	41.57	47.00	49.26	57.10
	T/R	8.70	11.70	14.80	17.40	20.10	24.00	28.50	32.10	33.70	38.90
	AMPS*	12.01	12.86	13.49	13.96	14.61	15.69	16.60	17.76	18.04	19.74
	HI PR	227	234	244	254	287	305	317	345	351	392
	LO PR	33	43	54	62	63	77	94	106	111	129
1760	MBh†	13.20	19.61	23.36	25.41	27.05	33.42	41.67	46.85	49.01	56.63
	T/R	8.40	12.40	14.70	15.90	16.90	20.80	25.80	29.00	30.30	34.90
	AMPS*	12.35	12.85	13.65	14.03	14.23	14.99	16.74	17.57	17.99	19.76
	HI PR	223	256	263	250	254	271	319	334	343	387
	LO PR	33	40	52	62	65	79	94	106	111	127

### P\*X448 (LOW CAPACITY)

CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
1000	MBh†	6.32	9.56	13.29	16.23	17.56	22.40	28.25	32.80	34.92	42.76
	T/R	7.90	11.50	15.50	18.60	19.90	24.70	30.40	34.80	36.80	44.20
	AMPS*	9.89	10.38	10.81	11.09	11.21	11.60	12.03	12.35	12.51	13.17
	HI PR	228	242	258	270	276	297	321	339	347	379
	LO PR	34	45	57	66	70	85	101	114	119	139
1100	MBh†	6.41	9.68	13.44	16.40	17.76	22.67	28.58	33.20	35.36	43.48
	T/R	7.20	10.60	14.20	17.00	18.20	22.60	27.80	31.80	33.70	40.60
	AMPS*	9.91	10.37	10.76	11.00	11.10	11.45	11.80	12.09	12.24	12.92
	HI PR	226	238	253	264	270	289	310	327	335	370
	LO PR	34	45	57	66	70	85	101	114	119	139
1200	MBh†	6.50	9.78	13.57	16.55	17.94	22.88	28.85	33.54	35.71	42.76
	T/R	6.70	9.80	13.10	15.70	16.80	20.90	25.70	29.30	31.00	44.20
	AMPS*	9.95	10.37	10.72	10.94	11.03	11.33	11.64	11.90	12.03	13.17
	HI PR	224	236	249	259	264	282	302	317	325	379
	LO PR	34	45	56	66	70	85	101	113	119	139

† Total capacities are net (I.D blower heat added) system capacities

\* System amps are total of indoor and outdoor amps

## HEAT PUMP HEATING EXPANDED PERFORMANCE DATA

P*X460 (HIGH CAPACITY)											
CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
1575	MBh†	16.93	21.89	29.76	32.08	33.99	40.90	48.34	55.96	57.86	69.44
	T/R	11.30	14.70	20.00	21.50	22.80	27.40	32.50	37.80	39.10	47.30
	AMPS*	14.57	15.52	16.18	17.22	17.54	18.71	19.98	21.87	21.68	24.48
	HI PR	228	237	276	260	265	282	301	348	328	387
	LO PR	32	41	47	58	62	74	90	101	108	127
1750	MBh†	18.19	24.51	30.14	32.40	34.33	41.42	48.67	57.00	59.06	70.52
	T/R	11.00	14.80	18.10	19.50	20.60	24.90	29.30	34.50	35.70	42.90
	AMPS*	14.13	14.97	16.20	17.20	17.51	18.62	19.74	21.36	21.46	23.74
	HI PR	238	258	268	255	259	275	291	319	319	357
	LO PR	29	37	47	58	61	75	90	102	108	127
1925	MBh†	18.67	24.97	30.54	32.74	34.69	41.80	49.23	57.69	60.60	71.70
	T/R	10.20	13.60	16.70	17.80	18.90	22.80	26.80	31.50	33.20	39.40
	AMPS*	14.29	14.98	16.28	17.24	17.53	18.57	19.63	21.20	21.74	23.59
	HI PR	235	250	263	251	255	269	283	312	326	349
	LO PR	30	37	47	58	61	75	90	101	106	126
P*X460 (LOW CAPACITY)											
CFM		Outdoor Ambient Temperature - Degrees F, Dry Bulb									
		-10	0	10	17	20	30	40	47	50	60
		Entering Indoor Temperature - Degrees F, Dry Bulb									
		70									
1170	MBh†	10.45	13.87	18.17	22.17	23.50	27.18	33.52	38.70	42.76	52.47
	T/R	12.00	15.30	19.30	22.90	24.00	26.80	32.00	36.20	39.80	47.70
	AMPS*	12.96	13.13	13.23	13.59	13.73	14.03	14.35	14.72	15.46	16.54
	HI PR	233	243	261	286	292	281	300	317	345	384
	LO PR	33	43	54	61	66	82	97	109	115	135
1300	MBh†	10.48	13.79	17.51	22.00	22.05	28.54	33.83	40.60	43.20	52.30
	T/R	10.80	13.60	16.60	20.40	20.20	25.20	28.90	34.10	36.00	42.40
	AMPS*	12.90	13.12	13.37	13.35	13.63	14.05	14.01	14.78	15.01	15.59
	HI PR	230	237	246	274	260	299	291	322	331	358
	LO PR	33	43	55	62	68	81	97	109	114	134
1430	MBh†	10.49	14.01	17.67	22.20	22.19	27.64	35.80	40.95	43.58	51.47
	T/R	9.80	12.60	15.20	18.60	18.40	22.10	27.80	31.10	32.80	37.60
	AMPS*	12.87	12.87	13.31	13.25	13.45	13.54	14.14	14.53	14.73	15.13
	HI PR	227	236	243	270	255	267	303	316	322	343
	LO PR	33	42	54	62	68	81	96	108	114	132



† Total capacities are net (I.D blower heat added) system capacities

\* System amps are total of indoor and outdoor amps

## ACCESSORIES

### ROOF CURBS

Model Number	Height (K) inches (mm)	Use With Model Size
AXB020CLA	8" (203.2)	24, 30
AXB020CMA	14" (355.6)	
AXB020CHA	24" (609.6)	
AXB030CLA	8" (203.2)	36, 42, 48, 60
AXB030CMA	14" (355.6)	
AXB030CHA	24" (609.6)	

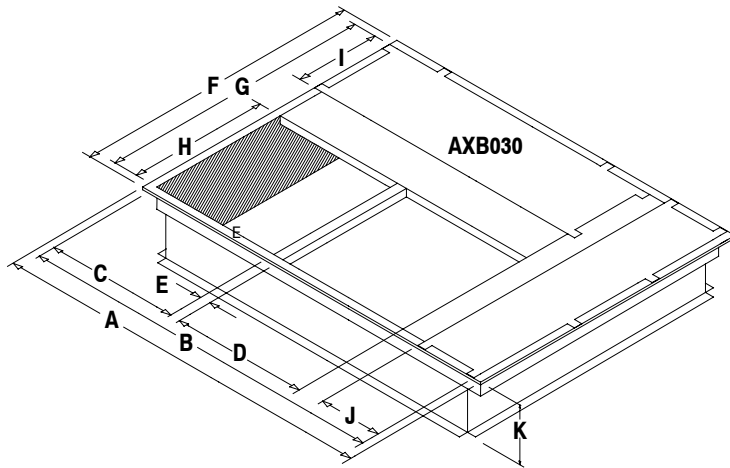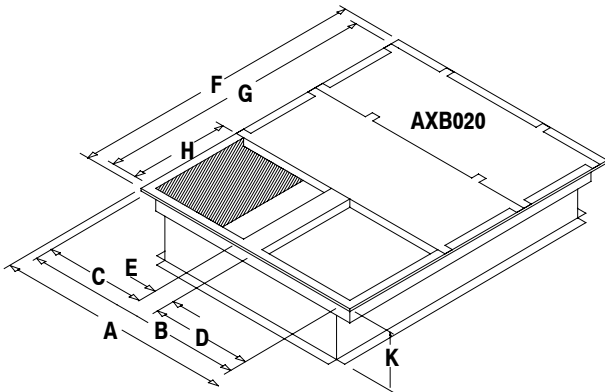

### ROOF CURB DIMENSIONS inches (mm)

Model Number	A	B	C	D	E	F	G	H	I	J	K (LA)	K (MA)	K (HA)
AXB020(L,M,H)A	42-3/4 (1086)	39-3/4 (1010)	18 (457)	18 (457)	3-3/4 (95)	42-3/4 (1086)	39-3/4 (1010)	18 (457)	-	-	8 (210)	14 (356)	24 (610)
AXB030(L,M,H)A	67-3/4 (1721)	64-3/4 (1721)	23 (584)	23 (584)	2-1/2 (63.5)	42-3/4 (1086)	39-3/4 (1010)	23 (584)	12 (305)	12 (305)	8 (210)	14 (356)	24 (610)

### SQUARE to ROUND TRANSITION inches (mm)

Model Number	Round Size	Use With Roof Curb	Use With Model Size
AXB020CTA	16" (406)	AXB020CLA, AXB020CMA, AXB020CHA	24, 30
AXB030CTA	18" (457)	AXB030CLA, AXB030CMA, AXB030CHA	36, 42, 48, 60

### CONCENTRIC GRILLE - FLUSH MOUNT

Model Number	Use With Roof Curb	Use With Model Size
AXB020CFA	AXB020CLA, AXB020CMA, AXB020CHA	24, 30
AXB030CFA	AXB030CLA, AXB030CMA, AXB030CHA	36, 42, 48, 60

### CONCENTRIC GRILLE - STEP DOWN

Model Number	Use With Roof Curb	Use With Model Size
AXB020CSA	AXB020CLA, AXB020CMA, AXB020CHA	24, 30
AXB030CSA	AXB030CLA, AXB030CMA, AXB030CHA	36, 42, 48, 60



## ACCESSORIES

### ECONOMIZERS (ALL FULLY MODULATING)\*

Part Number	Application	Motion	Control	Use With Model Size
AXB020HED	Horizontal	Fully Modulating w/ Return Air Damper w/ Relief Damper	Enthalpy	24, 30
AXB030HED				36, 42, 48, 60
AXB020EMD	Downflow			24, 30
AXB030EME				36, 42, 48, 60
AXB020HPE	Horizontal	Fully Modulating w/ Return Air Damper w/ Relief Damper	Dry Bulb Only	24, 30
AXB030HPE				36, 42, 48, 60
AXB020EPE	Downflow			24, 30
AXB030EPF				36, 42, 48, 60

- \* Three position economizers no longer available.  
 Economizers for model sizes 24 & 30 include Filters and Filter Racks.  
 Economizers for model sizes 36, 42, 48, and 60 do NOT include Filters (Filter Racks shipped with unit).

### 0% - 25% FRESH AIR DAMPERS (use in DOWNFLOW application only) \*

Model Number	Control	Use With Model Size
AXB020FAC	Manual	24, 30
AXB030FAC		36, 42, 48, 60,
AXB020FMC	Motorized	24, 30
AXB030FMC		36, 42, 48, 60,

- \* Unit must have internal filters to protect evaporator coil when Fresh Air Damper is installed.  
 Model sizes 24 & 30 shipped WITHOUT Filter Racks or Filters.  
 Model sizes 36, 42, 48, and 60 shipped WITH Internal Filter Racks, but WITHOUT Filters.

### FILTER RACK and FILTER \* inches (mm)

Model Number	Application	Filter Location	Filter Size	Use With Model Size
AXB020FKA	Downflow	Internal	18 x 25 x 1 (457 x 635 x 25)	24, 30
AXB020FHC	Horizontal	External	20 x 25 x 1 (508 x 635 x 25)	

- \* Model sizes 24 & 30 shipped WITHOUT Filter Racks or Filters.  
 Model sizes 36, 42, 48, and 60 shipped WITH Internal Filter Racks, but WITHOUT Filters.

### LOW AMBIENT CONTROL

Model Number	FAST Part Number	Description	Use With Model Size
ALA14CU0A	n/a	Pressure switch cycles condenser fan	ALL
n/a	1148232	Freeze 'stat, opens 30° F, closes 50° F	ALL

### COIL PROTECTION

FAST Part Number	Description	Use With Model Size
1149485	Coil Guard, black, two-piece	24, 30
1068133	Hail Guard, black, two-piece	24, 30
1149486	Coil Guard, black, three-piece	36, 42, 48, 60,
1068134	Hail Guard, black, three-piece	36, 42, 48, 60,

### OUTDOOR THERMOSTAT

Model Number	Description	Use With Model Size
AMF002OTA	2 Stage, Electronic	ALL

### INDOOR THERMOSTAT


Model Number	Description	Use With Model Size
TSTAT0404	Two-stage Heat, Two-stage Cool - without humidification control	ALL
TSTAT0405	Two-stage Heat, Two-stage Cool - with humidification control	ALL

### GAS CONVERSION KITS

FAST Part Number	Description	Heat Input (BTU/h)	Elevation above Sea Level
1175406	Natural Gas to Propane Gas	40,000 - 120,000	0' - 10,000' <sup>1</sup>
1175405	Propane Gas to Natural Gas		0' - 10,000' <sup>2</sup>

- 1 Field-supplied orifices required for elevations of 3,001 to 10,000 ft above sea level.  
 2 Field-supplied orifices required for elevations of 2,001 to 10,000 ft above sea level.

# UNIT DIMENSIONS

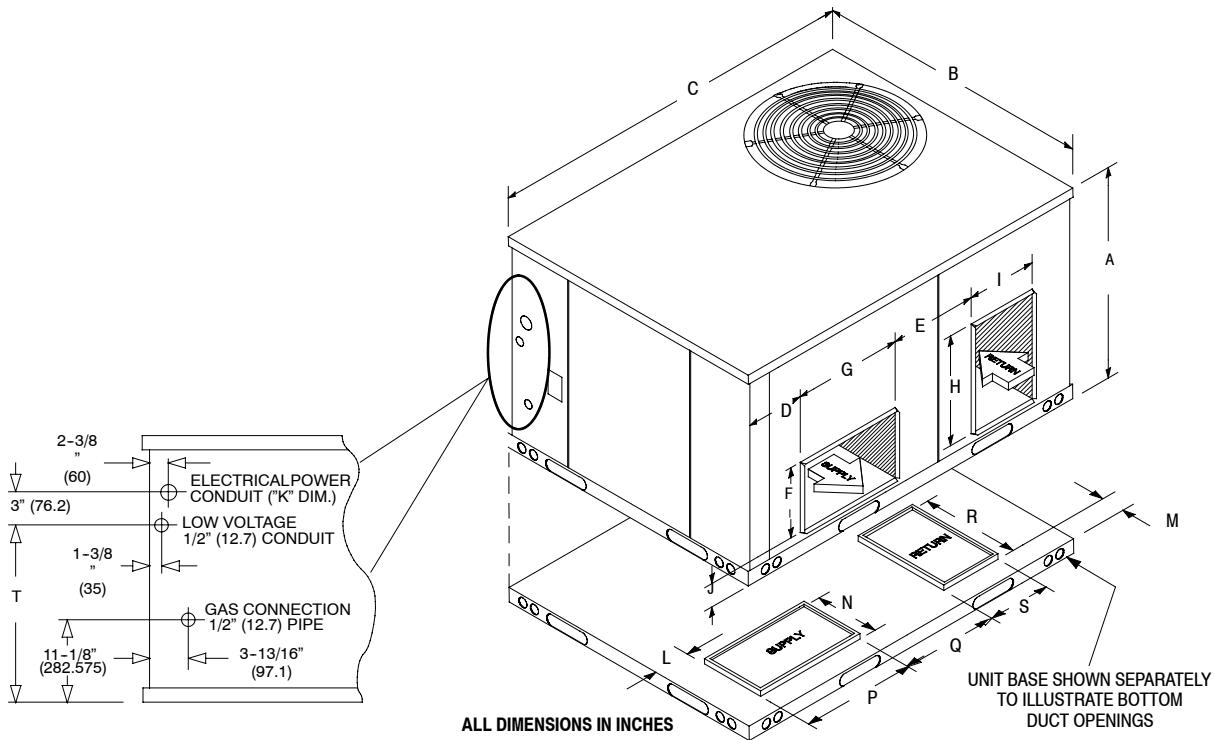

Model Size (Ton)	A	B	C	D	E	F	G	H	I	J	K	L	M	N**	P**	Q	R	S	T	Bottom L x W * Inside Base Rail
2, 2 1/2 (825)	32-1/2 (825)	47-3/8 (1203)	47-3/8 (1203)	3-1/8 (79)	11-1/8 (283)	12 (305)	14-1/4 (362)	14-1/4 (362)	12 (305)	4 (102)	3/4 & 1 (19 & 25)	4-1/4 (108)	4-3/8 (111)	14-1/2 (368)	12-1/4 (311)	12-1/8 (308)	14-1/4 (362)	12-1/4 (311)	21-1/2 (546)	43-1/8 x 43-1/8 (1095 x 1095)
3, 3 1/2	36 (914)	47-3/8 (1203)	73 (1854)	4-5/8 (117)	15 (381)	12 (305)	18-3/4 (476)	18-3/4 (476)	12 (305)	4 (102)	1 & 1-1/4 (25 & 32)	4-1/4 (108)	5-1/4 (133)	12-1/4 (311)	19 (483)	15 (381)	19 (483)	12-1/4 (311)	25-1/16 (637)	68-3/4 x 43-1/8 (1746 x 1095)
4, 5	42 (1067)	47-3/8 (1203)	73 (1854)	4-5/8 (117)	15 (381)	12 (305)	18-3/4 (476)	18-3/4 (476)	12 (305)	4 (102)	1 & 1-1/4 (25 & 32)	4-1/4 (108)	5-1/4 (133)	12-1/4 (311)	19 (483)	15 (381)	19 (483)	12-1/4 (311)	31-1/16 (789)	68-3/4 x 43-1/8 (1746 x 1095)

\*\* The supply opening in the drawing is shown for the orientation in the 3 to 5 Ton units. The opening for the 2 to 2-1/2 Ton units is rotated 90°, so the N and P dimensions are correct.

## MODEL NOMENCLATURE

<b>MODEL SERIES</b>	<b>P</b>	<b>D</b>	<b>X</b>	<b>4</b>	<b>36</b>	<b>060</b>	<b>K</b>	<b>00</b>	<b>A</b>	<b>1</b>
P = Package										
D = Dual Fuel										
X = R-410A										
4 = 14					<b>SEER</b>					
24 = 24,000 BTUH = 2 Tons										
30 = 30,000 BTUH = 2.5 Tons										
36 = 36,000 BTUH = 3 Tons										
42 = 42,000 BTUH = 3.5 Tons										
48 = 48,000 BTUH = 4 Tons										
60 = 60,000 BTUH = 5 Tons										
040 = 40,000										
060 = 60,000										
080 = 80,000										
120 = 120,000										
										<b>NOMINAL HEATING BTUH</b>
K = 208/230-1-60										<b>VOLTAGE</b>
00 = No Options										
01 = Low NOx										<b>FACTORY INSTALLED OPTIONS</b>
Sales Model Digit										
Engineering Digit										

## GUIDE SPECIFICATIONS

### CABINET

The cabinet is made of G-90 galvanized steel, phosphate coated with a tough acrylic finish coat for long lasting weatherproof construction. The base rails are 18 gauge steel with fork lift slots and holes provided for lifting shackles. The unit is designed with convertible airflow for either horizontal or downflow applications with conversion accomplished by relocating two panels. Indoor blower compartment interior cabinet surfaces are insulated with a minimum 3/4" thick, flexible glass insulation, coated on the air side. Aluminum foil faced glass fiber insulation is used in the furnace compartment.

### HEAT PUMP SECTION

The unit is factory charged and operationally ready upon delivery. The unit refrigerant circuit has a high efficiency fully hermetic compressor with internal overload protection, and copper tube / aluminum fin evaporator and condenser coils. The unit is designed for cooling operation to 40° F and will be capable of being wired for field installed economizer type accessories.

### COILS

The evaporator and condenser coils are fabricated with aluminum fins mechanically bonded to copper tubing. Both coils are pressure tested prior to assembly into the unit and electronically leak tested after assembly into the unit.

### CONDENSER FAN

The unit has a single direct-drive propeller-fan / motor assembly. The assembly is mounted directly to a vertical-discharge grille that is easily removed for service. Motors are 1100 RPM with sleeve or ball bearings and internal overload protection.


### EVAPORATOR BLOWER

All units have a direct-drive evaporator blower motor as a standard. The direct-drive evaporator blower motor has sleeve bearings and internal overload protection.


### GAS HEATING SECTION

The gas-fired heating section features an induced draft blower for combustion air. The unit has an tubular stainless steel heat exchanger located on the discharge air side of the blower. The system uses in-shot burners ignited by a direct spark ignition system, protected by both a high heat limit switch and flame roll-out switch. The induced draft blower motor is interlocked with a proven air pressure safety device.

### INSTALLATION CLEARANCES

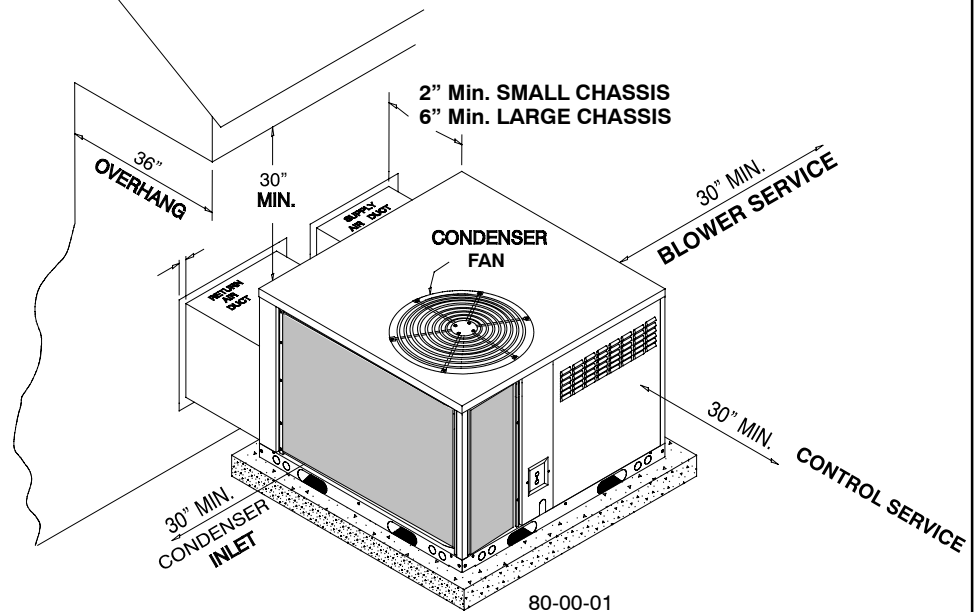

### RIGGING DETAILS

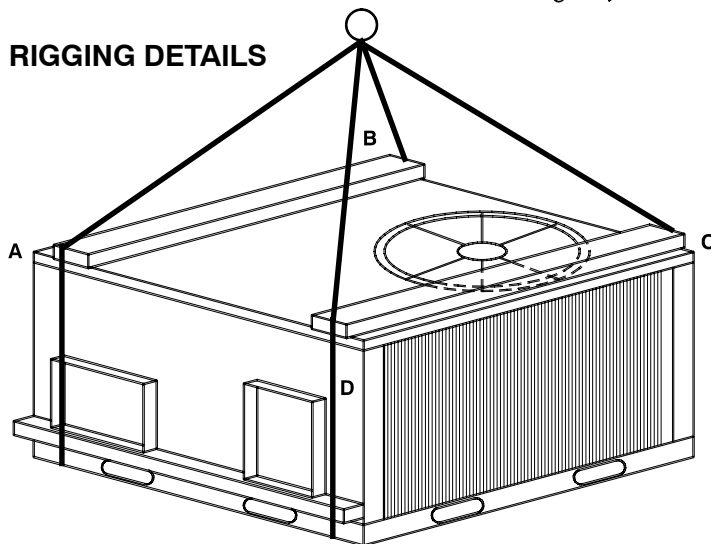

### CORNER WEIGHTS (LBS)

MODEL	A	B	C	D	OPERATING WEIGHT TOTAL
PDX424	87	123	132	98	440
PDX430	87	123	132	98	440
PDX436	99	136	145	102	482
PDX442	125	171	183	129	608
PDX448	145	172	186	146	649
PDX460	151	179	193	152	674

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE