



# Tempstar OptiClean™

## Negative Air Machine – Minimum 500 CFM


FN1AAF005000

The Tempstar OptiClean negative air machine is a portable, minimum 500 CFM solution primarily designed to help convert normal hospital rooms into airborne infectious isolation rooms (AIIR). Designed to comply with ASHRAE’s Standard 170 for Ventilation of Health Care Facilities, the Tempstar OptiClean uses a 99.97% efficient filter and a heavy duty, yet quiet, motor to remove filtered contaminated air from the room. The resulting negative air pressure, or “vacuum effect,” helps limit the spread of airborne contaminants into surrounding areas. If negative pressure is not required, such as an open-air, temporary hospital, the machine can be used as an air “scrubber,” pulling air in, removing many contaminants, and discharging cleaner air back into the space.

### Product Highlights and Specifications

- 99.97% efficient, long-life HEPA filter removes particles as small as 0.3 microns
- Standard MERV 7 or higher pre-filter
- Minimum 500 CFM
- Meets or exceeds the ASHRAE Standard 170: Ventilation of Health Care Facilities
- HEPA filter rack and sealing design meet air leakage requirement
- Vertical design for smaller footprint compared to many competitors
- Portable and adaptable to nearly any appropriately-sized location
- Heavy-duty, lockable casters for easy transport
- Red filter indicator light alerts user when it’s time to replace a filter
- Green on/off switch illuminates when the unit is on and operating
- Ten-foot long power cord with strain relief
- Exhaust transition to standard 10-inch round duct included
- Galvanized steel, pre-painted cabinet is fully insulated
- 115V
- UL® listed
- Cabinet dimensions: 17-5/8” W x 22-1/16” D x 49-5/8” H
- One-year limited warranty

**500 ACFM Unit Data**

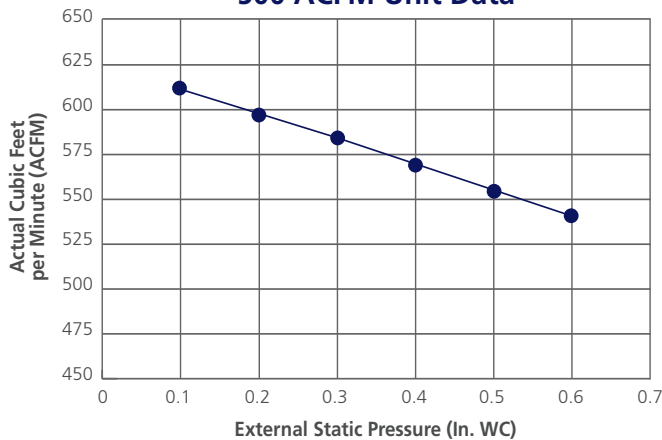

Airflow based upon clean pre-filter at 115V with factory-approved HEPA filter.

Airflow and pressure measured with 10’ flex duct installed.




# Additional Product Details

## Pre-Installed Filters

- The Tempstar OptiClean™ ships with two filters pre-installed for your convenience: a minimum MERV 7 pre-filter and a HEPA filter
  - The minimum MERV 7 pre-filter recommended replacement is 60-90 days and should be available locally\*
  - The long-life HEPA filter provides approximately 40,000 hours of operation, or four years, under normal operation and maintenance\*

\* Applies to negative air machine applications only.  
Filter life in air scrubber applications would be reduced.

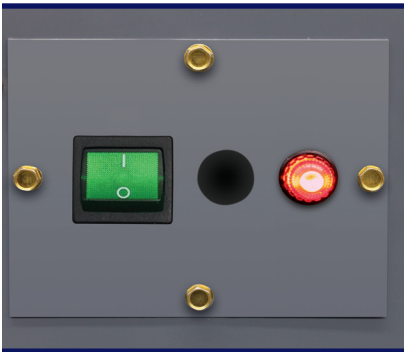


## Filter Alert / Pressure Indicator

- A red light illuminates when it is time to check and/or replace one or both of the unit's filters
- A green on/off switch illuminates when the unit is on and operating

## Some Assembly Required

- Locking casters and round duct transition assembly are shipped with every unit
- Check with your equipment distributor for details

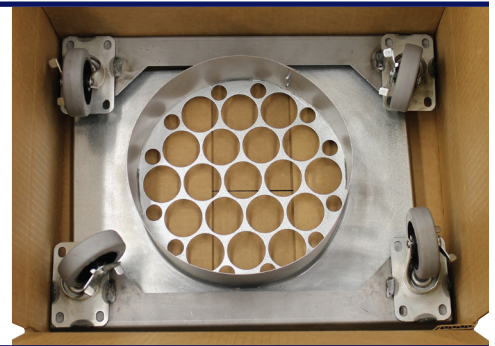

## Limited Warranty

The Tempstar OptiClean is covered by a one-year parts limited warranty. See limited warranty certificate for complete details and restrictions.

Currently designed for  
Commercial applications only.

UL and the UL logo are  
trademarks of UL LLC. 

**TEMPSTAR**  
Heating and Cooling Products

GoTempstar.com

© 2020 Carrier  
All rights reserved

401 22 2209 00  
05/2020 Rev.

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

A Carrier Company