



Commercial Packaged Rooftops Units with X-Vane™ Fan Standard Efficiency

GAS HEATING/ELECTRIC COOLING MODELS – RGV

| Nominal Cooling Ton Size | Cooling Stages | AHRI Efficiency (SEER) IEER | Dimensions (in) L x W x H | Gas Heating Input (Btuh) | | | Approx. Unit Weight (lbs) |
|--------------------------|----------------|-----------------------------|---------------------------|--------------------------|--------|------|---------------------------|
| | | | | Low | Medium | High | |
| 3 | 1 | (14.0) | 74 x 47 x 33 | 67 | 110 | – | 482 |
| 4 | 1 | (14.0) | 74 x 47 x 33 | 67 | 110 | 150 | 543 |
| 5 | 1 | (14.0) | 74 x 47 x 33 | 67 | 110 | 150 | 556 |
| 6 | 2 | 15.0 | 74 x 47 x 41 | 67 | 110 | 150 | 607 |

ELECTRIC HEAT/ELECTRIC COOLING & COOLING ONLY MODELS – RAV

| Nominal Cooling Ton Size | Cooling Stages | AHRI Efficiency (SEER) IEER | Dimensions (in) L x W x H | Electrical Heat Nominal KW Range | Approx. Unit Weight (lbs) |
|--------------------------|----------------|-----------------------------|---------------------------|----------------------------------|---------------------------|
| 3 | 1 | (14.0) | 74 x 47 x 33 | 4.0 to 15.0 | 437 |
| 4 | 1 | (14.0) | 74 x 47 x 33 | 4.0 to 21.0 | 498 |
| 5 | 1 | (14.0) | 74 x 47 x 33 | 6.5 to 24.0 | 511 |
| 6 | 2 | 15.2 | 74 x 47 x 41 | 6.5 to 24.0 | 562 |

High-Efficiency

GAS HEATING/ELECTRIC COOLING MODELS – HIGH EFFICIENT RGW

| Nominal Cooling Ton Size | Cooling Stages | AHRI Efficiency (SEER) | Dimensions (in) L x W x H | Gas Heating Input (Btuh) | | | Approx. Unit Weight (lbs) |
|--------------------------|----------------|------------------------|---------------------------|--------------------------|--------|------|---------------------------|
| | | | | Low | Medium | High | |
| 3 | 2 | (16.0) | 74 x 47 x 33 | 67 | 110 | – | 513 |
| 4 | 2 | (16.0) | 74 x 47 x 33 | 67 | 110 | 150 | 555 |
| 5 | 2 | (16.0) | 74 x 47 x 41 | 67 | 110 | 150 | 600 |

ELECTRIC HEAT/ELECTRIC COOLING & COOLING ONLY MODELS – HIGH EFFICIENT RAW


| Nominal Cooling Ton Size | Cooling Stages | AHRI Efficiency (SEER) | Dimensions (in) L x W x H | Electrical Heat Nominal KW Range | Approx. Unit Weight (lbs) |
|--------------------------|----------------|------------------------|---------------------------|----------------------------------|---------------------------|
| 3 | 2 | (16.0) | 74 x 47 x 33 | 4.0 to 15.0 | 468 |
| 4 | 2 | (16.0) | 74 x 47 x 33 | 4.0 to 21.0 | 510 |
| 5 | 2 | (16.0) | 74 x 47 x 41 | 6.5 to 24.0 | 555 |

Full Range of Pre-Certified, Factory-Installed Options

- Temperature Sensing EconoMi\$er with Relief
- Enthalpy Sensing EconoMi\$er with Relief
- Hot Gas Re-Heat
- Multiple Gas Heat Sizes
- Stainless Steel Gas Heat Exchangers
- Return Air Smoke Detector
- Supply Air Smoke Detector
- CO₂ Sensor
- Condensate Overflow Switch
- Multiple Static Fan Capabilities
- Thru-the-Base Utility Connections
- Non-Fused Disconnect Switch
- Hinged Access Panels
- Unpowered Convenience Outlet
- Powered Convenience Outlet
- Coated Coils:
 - Pre-Coat
 - E-Coat
 - Copper/Copper
- Electrical Mechanical Controls
- Extended Warranty Protection Plans

A full range of pre-engineered field installed accessories are also available.

XoVane™ Fan
It's not just a fan, it's a turning point.

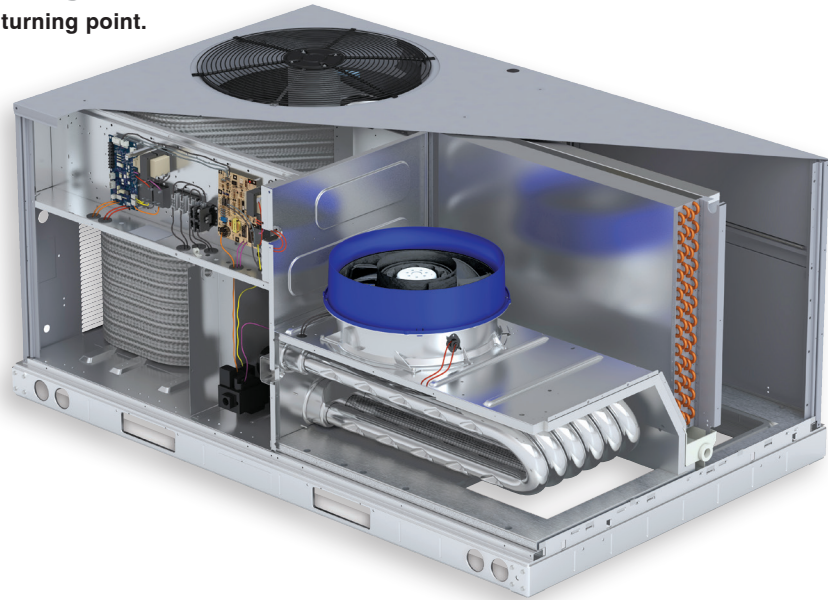

WWW.GODAYANDNIGHT.COM