

### FAN COILS

- 5 ton
- Available for Environmentally Sound R-410A systems
- TXV metering device factory installed
- Sweat connections
- Primary and secondary drain fittings with brass inserts
- Multiple electrical entry locations
- Time delay relay (TDR)
- Field installed heater packages from 5 kW – 30 kW available separately
- HUD approved for manufactured housing
- 208/230–1–60 supply voltage
- Units tested and certified by manufacturer to achieve a 2% or less leakage rate at 1.0 inch water column
- 1 inch thick insulation with R value of 4.2
- PSC 3–speed motor
- 5 amp automotive type fuse on control board
- Multiposition installation – upflow or horizontal left standard, horizontal right with minor modification (field convertible to downflow with available accessory kit)
- Filter (washable) factory supplied

#### WARRANTY\*

- 5 year parts limited warranty
  - With timely registration, an additional 5 year parts limited warranty
- \* For owner occupied, residential applications only. See warranty certificate for complete details and restrictions, including warranty coverage for other applications.



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to [www.ahridirectory.org](http://www.ahridirectory.org).




| Model Number | Tons | Nom. CFM (L/s) | Dimensions H x W x D in. (mm)                     | Filter Size in. (mm)            | Ship Wt lbs. (kg) |
|--------------|------|----------------|---------------------------------------------------|---------------------------------|-------------------|
| FSM4X6000**  | 5    | 2000 (944)     | 59–3/16 x 24–11/16 x 22–1/8<br>(1503 x 627 x 562) | 23–5/16 x 21–1/2<br>(592 x 546) | 201 (91)          |

- \*\* A = Copper Tube, Aluminum Fin Evaporator Coil  
 AL = Aluminum Tube, Aluminum Fin Evaporator Coil  
 AT = Tin Coated Copper Tube, Aluminum Fin Evaporator Coil


| FAN COIL MODEL NUMBER IDENTIFICATION GUIDE                |      |            |             |   |                 |                  |    |    |
|-----------------------------------------------------------|------|------------|-------------|---|-----------------|------------------|----|----|
| DIGIT POSITION                                            | 1    | 2          | 3           | 4 | 5               | 6,7,8,9          | 10 | 11 |
| F = Fan Coil                                              | F    | S          | M           | 4 | X               | 6000             | A  | T  |
| E = ECM                                                   | UNIT | MOTOR TYPE | M           | 4 | X               | 6000             | A  | T  |
| S = Standard PSC                                          |      |            |             |   |                 |                  |    |    |
| M = Multiposition                                         |      |            |             |   |                 |                  |    |    |
| INSTALLATION TYPE                                         |      |            |             |   |                 |                  |    |    |
| 4 = Environmentally Sound R-410A                          |      |            | REFRIGERANT |   | METERING DEVICE |                  |    |    |
| X = TXV                                                   |      |            |             |   |                 |                  |    |    |
| 6000 = 60,000 BTUH = 5 tons                               |      |            |             |   |                 | NOMINAL CAPACITY |    |    |
| A = Copper Tube, Aluminum Fin Evaporator Coil             |      |            |             |   |                 |                  |    |    |
| AL = Aluminum Tube, Aluminum Fin Evaporator Coil          |      |            |             |   |                 |                  |    |    |
| AT = Tin Coated Copper Tube, Aluminum Fin Evaporator Coil |      |            |             |   |                 |                  |    |    |
| SALES CODE / FEATURES                                     |      |            |             |   |                 |                  |    |    |

| ACCESSORIES PART NUMBER IDENTIFICATION GUIDE |    |    |    |     |   |  |
|----------------------------------------------|----|----|----|-----|---|--|
|                                              | EB | AC | 01 | NCB | A |  |
| EB = Evaporator Blower                       |    | AC | 01 | NCB | A |  |
| AC = Accessory                               |    |    |    |     |   |  |
| 01 = Product Identifier Number               |    |    |    |     |   |  |
| NCB = Non-Combustible Base Kit               |    |    |    |     |   |  |
| DFK = Down Flow Kit                          |    |    |    |     |   |  |
| PLG = Power Plug (no heat kit)               |    |    |    |     |   |  |
| SPK = Single Point Wiring Kit                |    |    |    |     |   |  |
| FKS = Filter Kit Small                       |    |    |    |     |   |  |
| FKM = Filter Kit Medium                      |    |    |    |     |   |  |
| FKL = Filter Kit Large                       |    |    |    |     |   |  |
| FKX = Filter Kit Extra Large                 |    |    |    |     |   |  |
| CTK = Condensate Trap Kit (PVC pipe)         |    |    |    |     |   |  |
| Sales Code                                   |    |    |    |     |   |  |

| ELECTRIC HEATER MODEL NUMBER IDENTIFICATION GUIDE                      |     |                    |   |   |   |   |
|------------------------------------------------------------------------|-----|--------------------|---|---|---|---|
|                                                                        | EHK | 05                 | A | K | N | 1 |
| EHK = Electric Heater Kit                                              |     |                    |   |   |   |   |
| 05 = 5 kW                                                              |     |                    |   |   |   |   |
| 07 = 7 kW                                                              |     |                    |   |   |   |   |
| 09 = 9 kW                                                              |     |                    |   |   |   |   |
| 10 = 10 kW                                                             |     |                    |   |   |   |   |
| 15 = 15 kW                                                             |     |                    |   |   |   |   |
| 18 = 18 kW                                                             |     |                    |   |   |   |   |
| 20 = 20 kW                                                             |     |                    |   |   |   |   |
| 25 = 25 kW                                                             |     |                    |   |   |   |   |
| 30 = 30 kW                                                             |     |                    |   |   |   |   |
|                                                                        |     | NOMINAL HEAT VALUE |   |   |   |   |
| Sales Code                                                             |     |                    |   |   |   |   |
| K = 208 / 230 single-phase                                             |     |                    |   |   |   |   |
| H = 208 / 230, 3-phase                                                 |     |                    |   |   |   |   |
| KC = 208 / 230, supplied as single phase, field convertible to 3-phase |     |                    |   |   |   |   |
| HC = 208 / 230 supplied as 3-phase, field convertible to single phase  |     |                    |   |   |   |   |
|                                                                        |     | VOLTAGE (60 Hz)    |   |   |   |   |
| Product Identifier                                                     |     |                    |   |   |   |   |
| Engineering Code                                                       |     |                    |   |   |   |   |

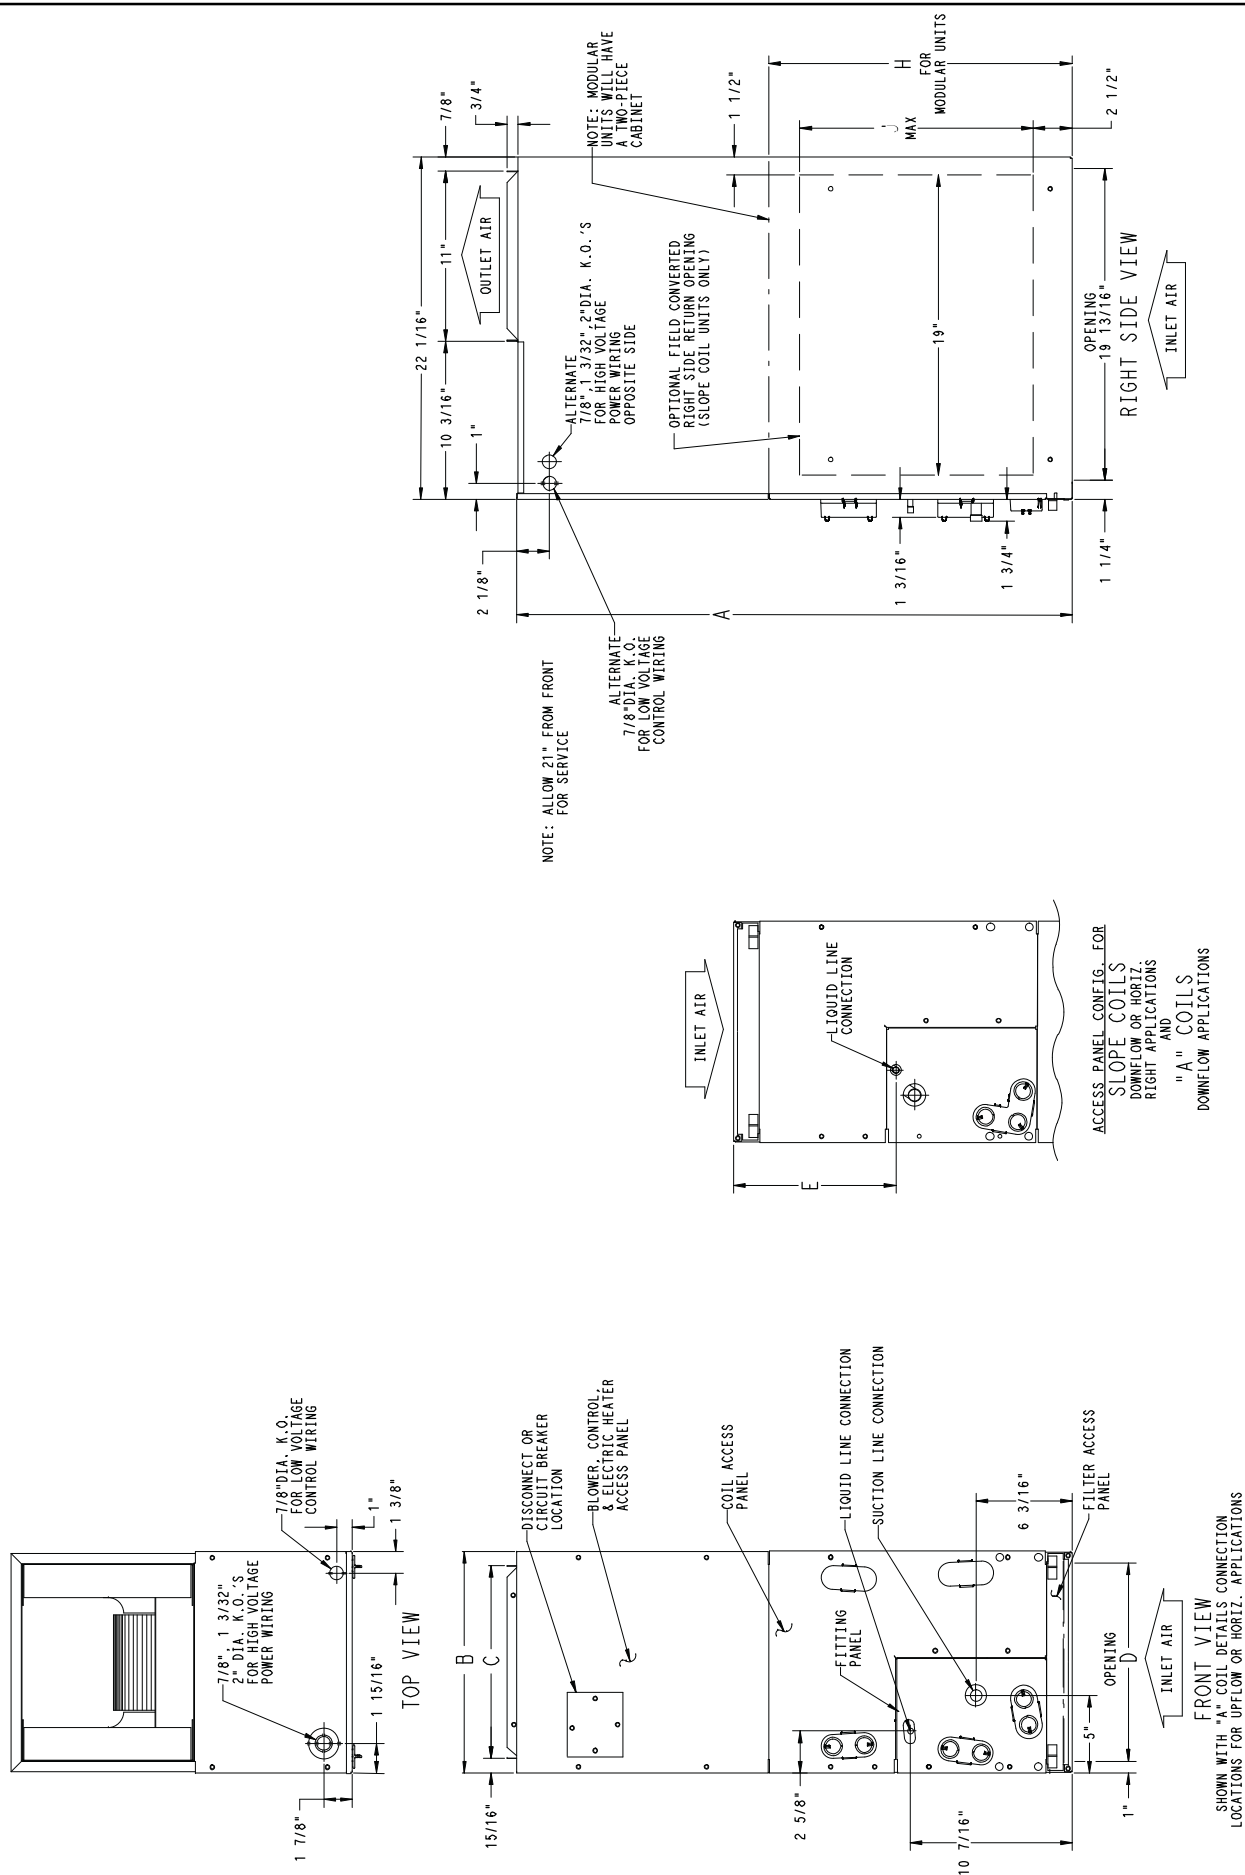


Dimensions Inches (English)

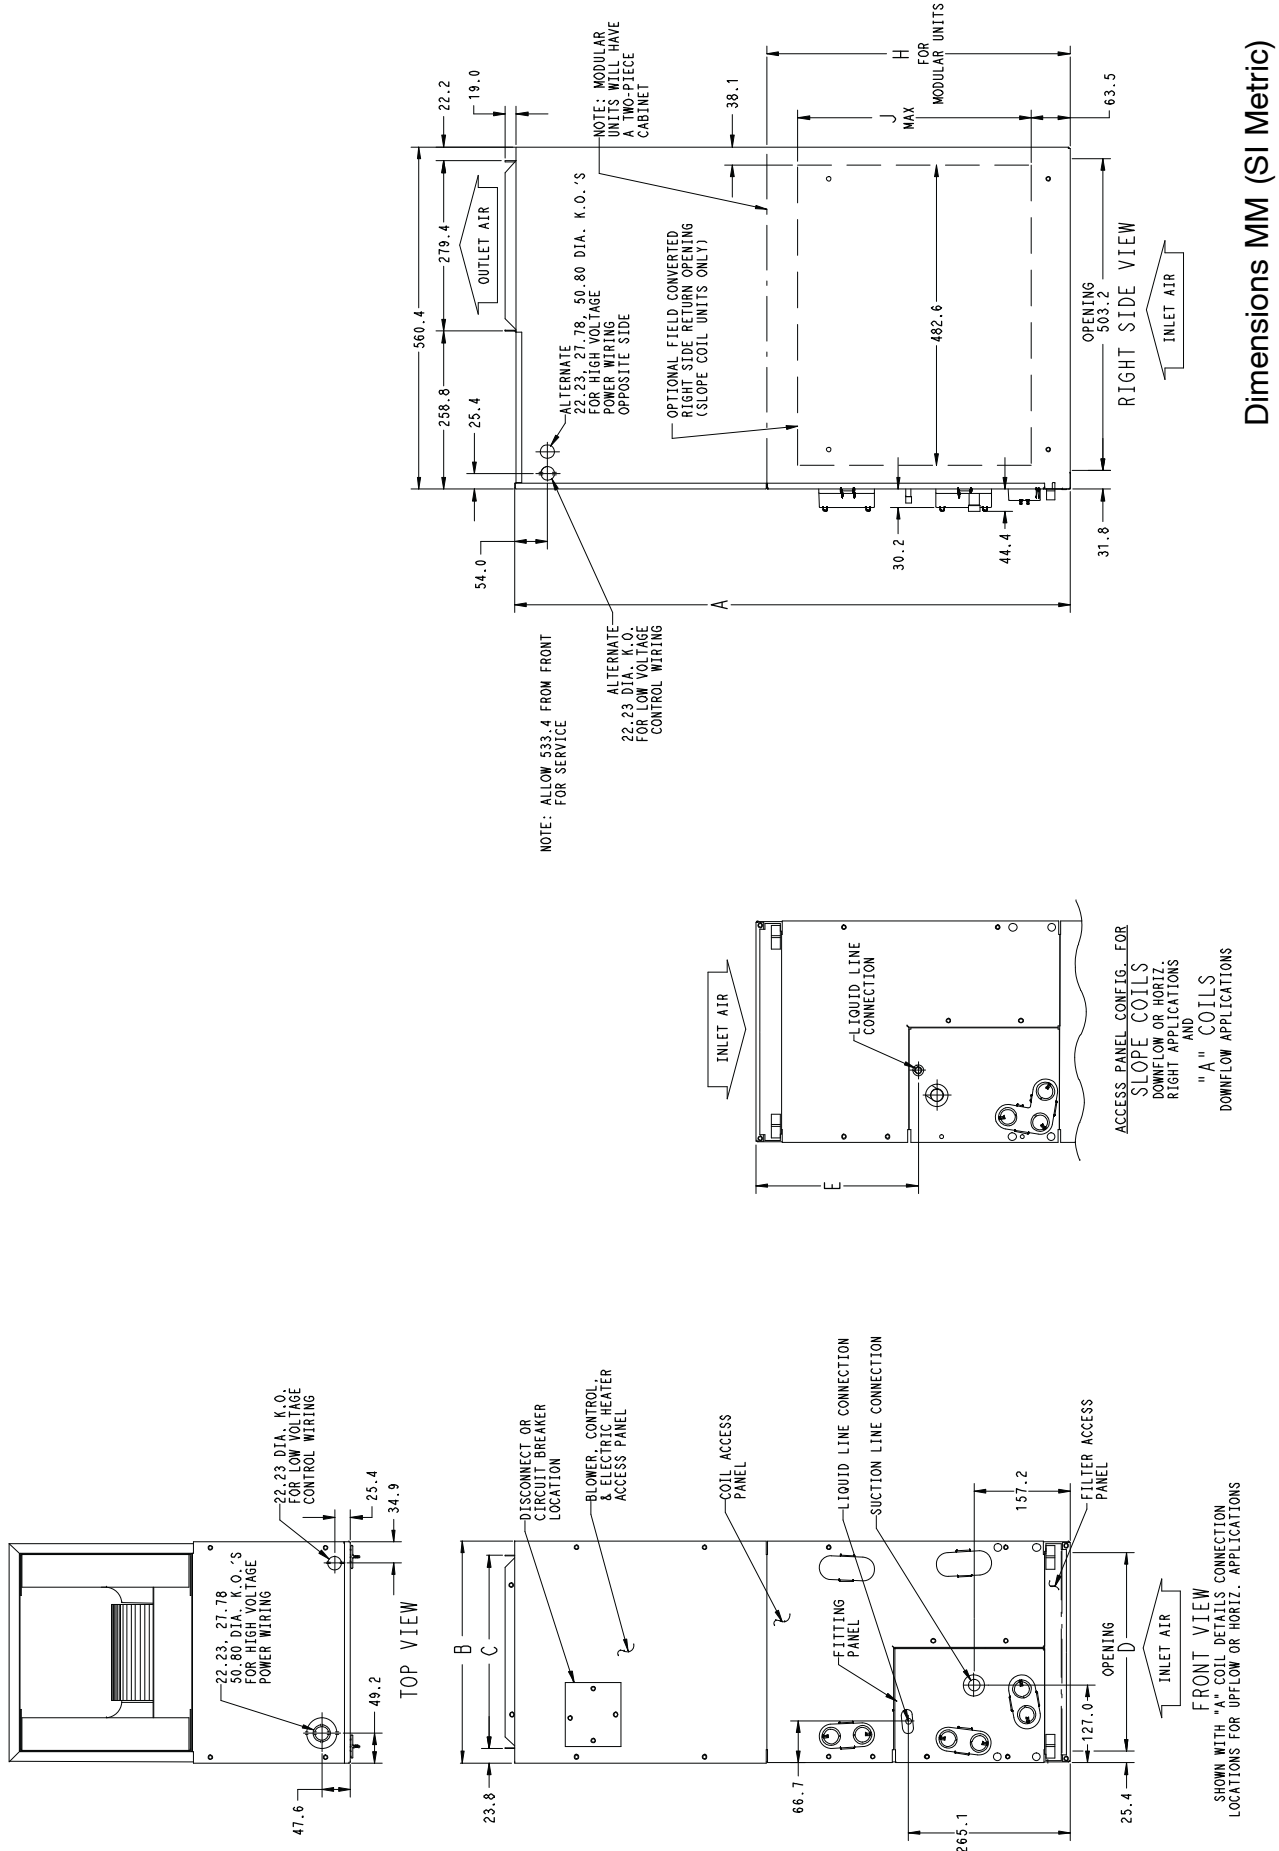


Dimensions MM (SI Metric)

NOTES:  
1. CONDENSATE PAN DRAIN CAPS NOT SHOWN FOR CLARITY.  
\* HORIZONTAL MOUNT LOCATIONS - DIMPLES PROVIDED IN TOP PANEL, AND BACK OF CABINET. IN CABINET BOTTOM, HOLES PROVIDED .136" DIA. HORIZONTAL HANGING HARDWARE TO BE FIELD SUPPLIED.

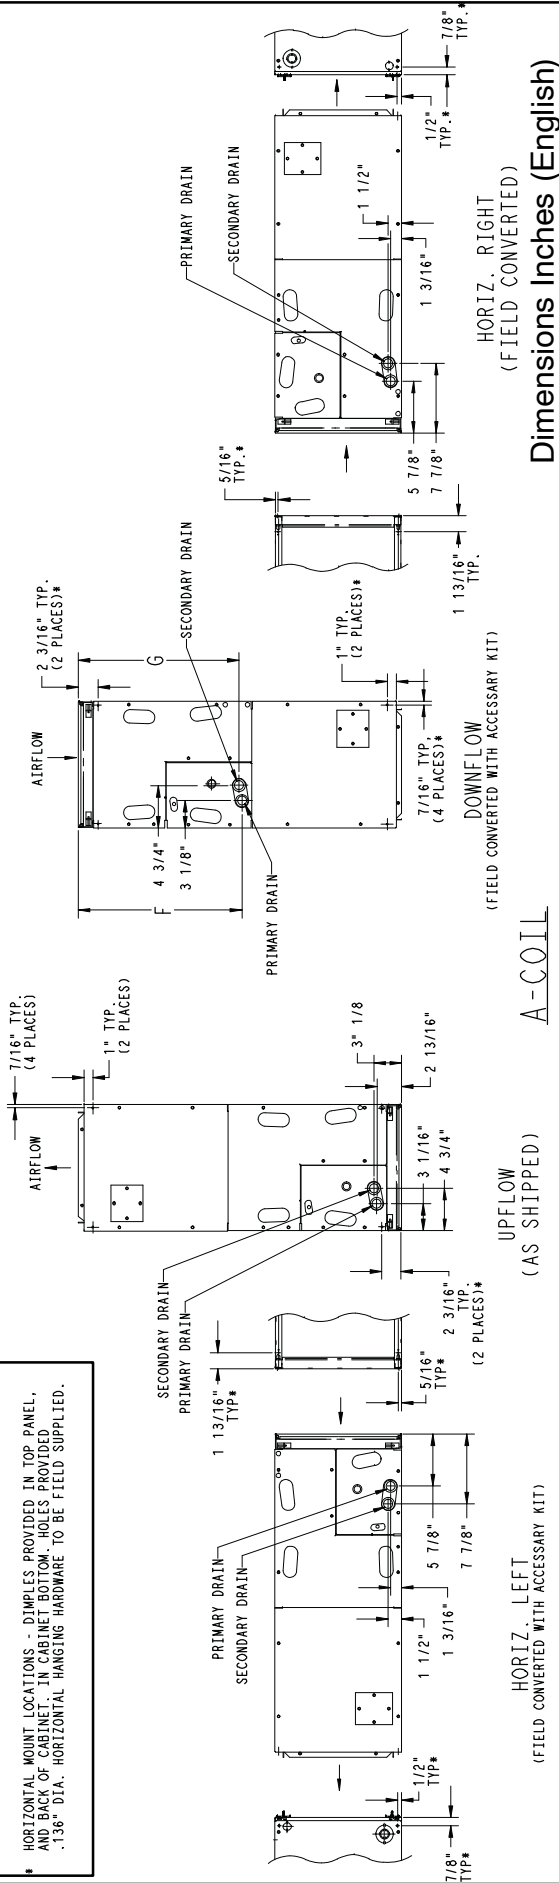

Dimensions Inches (English)

NOTES:  
1. CONDENSATE PAN DRAIN CAPS NOT SHOWN FOR CLARITY.  
\* HORIZONTAL MOUNT LOCATIONS - DIMPLES PROVIDED IN TOP PANEL, AND BACK OF CABINET. IN CABINET BOTTOM, HOLES PROVIDED 3.45 DIA. HORIZONTAL HANGING HARDWARE TO BE FIELD SUPPLIED.

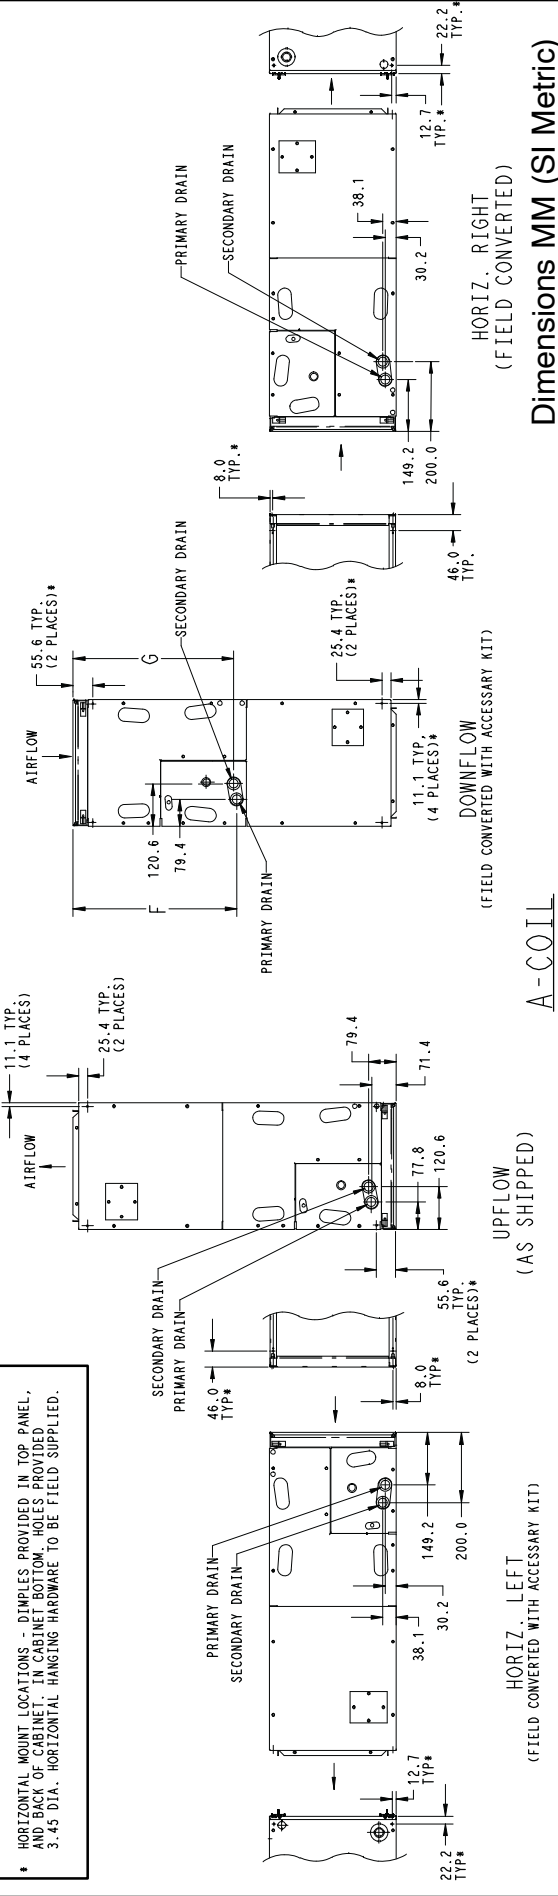

Dimensions MM (SI Metric)

| Model     | Size (tons) | Dimensions | A       | B        | C      | D        | E      | F        | G      | H       | J | Suct | Liq | Coil Type | Ship. Weight lbs. (kg) |
|-----------|-------------|------------|---------|----------|--------|----------|--------|----------|--------|---------|---|------|-----|-----------|------------------------|
| FSM4X6000 | 5           | inches     | 59-3/16 | 24-11/16 | 22-3/4 | 22-11/16 | 25-1/4 | 32-15/16 | 32-5/8 | 34-1/16 | — | 7/8  | 3/8 | "A"       | 201                    |
|           | 5           | mm         | 1503    | 627      | 578    | 576      | 641    | 837      | 829    | 865     | — | 22   | 10  | "A"       | 91                     |

| PHYSICAL DATA                               |                                         |
|---------------------------------------------|-----------------------------------------|
| Model                                       | Size                                    |
|                                             | FSM4X6000                               |
| <b>Blower Data (nominal)</b>                |                                         |
| CFM (L/s)                                   | 2000 (944)                              |
| Motor Type                                  | PSC (Permanent Split Capacitor) 3-speed |
| HP                                          | 3/4                                     |
| <b>Filter Data (washable)</b>               |                                         |
| in. (mm)                                    | 23-5/8x21-1/2 (600 x 546)               |
| <b>Coil Data – Face Area</b>                |                                         |
| ft <sup>2</sup> (m <sup>2</sup> )           | 7.42 (0.69)                             |
| <b>Refrigerant Line Connections (sweat)</b> |                                         |
| Liquid in. (mm)                             | 3/8 (10)                                |
| Suction in. (mm)                            | 7/8 (22)                                |

| ELECTRICAL DATA, FAN COIL ONLY WITHOUT ELECTRIC HEAT |                            |                                |                                                               |
|------------------------------------------------------|----------------------------|--------------------------------|---------------------------------------------------------------|
| 208/230V, single phase, 60 Hz                        |                            |                                |                                                               |
| Model                                                | Motor Full Load Amps (FLA) | Minimum Circuit Ampacity (MCA) | Maximum Fuse/Ckt Bkr Amps (Max OverCurrent Protection – MOCP) |
| FSM4X6000                                            | 5.2                        | 6.5                            | 15                                                            |

| AIRFLOW PERFORMANCE – CFM at a given Speed and Static reading |              |                                                                 |      |      |      |      |      |
|---------------------------------------------------------------|--------------|-----------------------------------------------------------------|------|------|------|------|------|
| Model                                                         | Blower Speed | Measured Static Pressure, inlet to outlet (inches water column) |      |      |      |      |      |
|                                                               |              | 0.10                                                            | 0.20 | 0.30 | 0.40 | 0.50 | 0.60 |
| FSM4X6000                                                     | High         | 2128                                                            | 2050 | 1965 | 1875 | 1778 | 1674 |
|                                                               | Medium       | 1959                                                            | 1898 | 1829 | 1750 | 1663 | 1566 |
|                                                               | Low          | 1748                                                            | 1709 | 1659 | 1598 | 1525 | 1442 |

**NOTES:**

- Airflow based upon dry coil at 230v with factory approved filter and electric heater (3 element heater size 6000).
- Airflow at 208 volts is approximately the same as 230 volts because the ECM motor is a constant torque motor. The torque doesn't drop off at the speeds the motor operates.
- To avoid potential for condensate blowing out of drain pan prior to making drain trap: Return static pressure must be less than 0.40 in. wc. Horizontal applications of 6000 size must have supply static greater than 0.20 in. wc.
- Airflow above 400 cfm/ton on 6000 size could result in condensate blowing off coil or splashing out of drain pan.
- Not recommended for use above 0.60 inches water column external static pressure.
- Shading – Airflow outside 450 cfm/ton.

| STATIC PRESSURE DROP ACROSS FILTER (inches of water column) |     |     |     |      |      |      |       |       |       |
|-------------------------------------------------------------|-----|-----|-----|------|------|------|-------|-------|-------|
| Model Size                                                  | CFM |     |     |      |      |      |       |       |       |
|                                                             | 400 | 600 | 800 | 1000 | 1200 | 1400 | 1600  | 1800  | 2000  |
| FSM4X6000                                                   | —   | —   | —   | —    | —    | —    | 0.120 | 0.152 | 0.187 |

| STATIC PRESSURE CORRECTION FROM DRY TO WET COIL (inches of water column)                                                                                                                                                                                                                        |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| Airflow performance chart above was developed using fan coils with DRY coils.<br>When taking a static reading across a WET coil, adjust the static pressure numbers by <b>adding</b> the values in this table (for a given CFM, wet coil will have greater static pressure drop than dry coil). |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

|            | CFM |     |     |     |     |      |      |      |      |      |      |       |       |       |       |       |
|------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|-------|-------|-------|-------|-------|
| Model Size | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 | 1300 | 1400 | 1500 | 1600  | 1700  | 1800  | 1900  | 2000  |
| FSM4X6000  | —   | —   | —   | —   | —   | —    | —    | —    | —    | —    | —    | 0.027 | 0.031 | 0.035 | 0.039 | 0.043 |

| MINIMUM CFM WHEN USING ELECTRIC HEAT (motor speed Low except as noted) |           |      |      |      |      |      |      |      |      |
|------------------------------------------------------------------------|-----------|------|------|------|------|------|------|------|------|
| Model Size                                                             | Heater kW |      |      |      |      |      |      |      |      |
|                                                                        | 5         | 8    | 9    | 10   | 15   | 18   | 20   | 24   | 30   |
| FSM4X6000                                                              | —         | 1750 | 1750 | 1750 | 1750 | 1750 | 1750 | 1750 | 1750 |

\* Indicates Medium speed (Blue wire) for 3-speed motor

‡ Indicates Medium speed (Blue wire) for 3-speed motor

| STATIC PRESSURE CORRECTION FOR ELECTRIC HEATERS (inches of water column)                                                                                                                                                                                                                                                                                                                                                            |           |   |         |         |       |               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---|---------|---------|-------|---------------|
| Airflow performance chart was developed using fan coils with 10 kW electric heater (2 elements) in the 1800 – 3600 model sizes, and 15 kW electric heaters (3 elements) in the 4800 – 6000 model sizes. When using a different number of heater elements, adjust the static pressure numbers by adding or subtracting the values in this table (for a given CFM, more electric heater elements create higher static pressure drop). |           |   |         |         |       |               |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | Heater kW |   |         |         |       |               |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | No Heater | 5 | 8 or 10 | 9 or 15 | 20    | 18, 24, or 30 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | 0         | 1 | 2       | 3       | 4     | 6             |
| FSM4X6000                                                                                                                                                                                                                                                                                                                                                                                                                           | +0.04     | — | +0.02   | 0       | –0.02 | –0.10         |

| ELECTRIC HEATER ELECTRICAL DATA |           |      |       |                             |                         |           |           |                            |           |           |                                   |        |        |                                    |
|---------------------------------|-----------|------|-------|-----------------------------|-------------------------|-----------|-----------|----------------------------|-----------|-----------|-----------------------------------|--------|--------|------------------------------------|
| Heater Model                    | Heater kW |      | PHASE | INTERNAL CIRCUIT PROTECTION | HEATER AMPS<br>208/230V |           |           | Min Ampacity ☆<br>208/230V |           |           | Min Wire Size (AWG)<br>208/230V 1 |        |        | Max Wire Length<br>208/230V (Ft)†† |
|                                 |           |      |       |                             |                         |           |           |                            |           |           |                                   |        |        |                                    |
|                                 | 230v      | 208v |       |                             | Single Circuit          | L1, L2    | L3, L4    | Single Circuit             | L1, L2    | L3, L4    | Single Circuit                    | L1, L2 | L3, L4 |                                    |
| EHK05AKN                        | 5         | 3.8  | 1     | None                        | 18.1/20.0               | —         | —         | 31.2/33.5                  | —         | —         | 8/8                               | —      | —      | —                                  |
| EHK05AKB                        | 5         | 3.8  | 1     | Ckt Bkr                     | 18.1/20.0               | —         | —         | 31.2/33.5                  | —         | —         | 8/8                               | —      | —      | —                                  |
| EHK07AKN                        | 8         | 6.0  | 1     | None                        | 28.9/32.0               | —         | —         | 44.7/48.5                  | —         | —         | 8/8                               | —      | —      | —                                  |
| EHK07AKB                        | 8         | 6.0  | 1     | Ckt Bkr                     | 28.9/32.0               | —         | —         | 44.7/48.5                  | —         | —         | 8/8                               | —      | —      | —                                  |
| EHK09AKN†                       | 9         | 6.8  | 1     | None                        | 32.8/36.0               | —         | —         | 49.5/53.5                  | —         | —         | 8/6                               | —      | —      | —                                  |
| EHK10AKN                        | 9         | 6.8  | 3     | None                        | 18.8/20.8               | —         | —         | 32.0/34.5                  | —         | —         | 8/8                               | —      | —      | —                                  |
| EHK10AKB                        | 10        | 7.5  | 1     | None                        | 36.2/40.0               | —         | —         | 53.8/58.5                  | —         | —         | 6/6                               | —      | —      | —                                  |
| EHK10AKF                        | 10        | 7.5  | 1     | Ckt Bkr                     | 36.2/40.0               | —         | —         | 53.8/58.5                  | —         | —         | 6/6                               | —      | —      | —                                  |
| EHK15AKF                        | 15        | 11.3 | 1     | Fuse                        | 54.2/59.9               | 36.2/40.0 | 18.1/20.0 | 76.3/83.4                  | 53.8/58.5 | 22.7/25.0 | 4/4                               | 6/6    | 10/10  | 75/76                              |
| EHK15AKB                        | 15        | 11.3 | 1     | Ckt Bkr                     | —                       | 36.2/40.0 | 18.1/20.0 | —                          | 53.8/58.5 | 22.7/25.0 | —                                 | 6/6    | 10/10  | 75/76                              |
| EHK15AHN                        | 15        | 11.3 | 3     | None                        | 31.3/34.6               | —         | —         | 47.7/51.8                  | —         | —         | 8/6                               | —      | —      | —                                  |
| EHK18AHN                        | 18        | 13.5 | 3     | None                        | 37.6/41.5               | —         | —         | 55.5/60.4                  | —         | —         | 6/6                               | —      | —      | —                                  |
| EHK20AKF                        | 20        | 15.0 | 1     | Fuse                        | 72.3/79.9               | 36.2/40.0 | 36.2/40.0 | 98.9/108.4                 | 53.8/58.5 | 45.3/50.0 | 3/2                               | 6/6    | 8/8    | 59/59                              |
| EHK20AKB                        | 20        | 15.0 | 1     | Ckt Bkr                     | —                       | 36.2/40.0 | 36.2/40.0 | —                          | 53.8/58.5 | 45.3/50.0 | —                                 | 6/6    | 8/8    | 59/59                              |
| EHK25AHCF†                      | 24        | 18.0 | 3     | Fuse                        | 50.1/55.4               | —         | —         | 71.2/77.8                  | —         | —         | 4/4                               | —      | —      | —                                  |
| EHK25AHCF†                      | 24        | 18.0 | 1     | Fuse                        | 86.7/95.5               | —         | —         | 116.9/127.9                | —         | —         | 1/1                               | —      | —      | —                                  |
| EHK30AHCF†                      | 30        | 22.5 | 3     | Fuse                        | 62.6/69.2               | —         | —         | 86.8/95.0                  | —         | —         | 3/3                               | —      | —      | —                                  |
| EHK30AHCF†                      | 30        | 22.5 | 1     | Fuse                        | 109.0/120.0             | —         | —         | 144.8/158.5                | —         | —         | 0/00                              | —      | —      | —                                  |

FIELD MULTIPOINT WIRING OR 24 AND 30 KW SINGLE PHASE

| FIELD MULTIPPOINT WIRING OR 24 AND 30 KW SINGLE PHASE |           |      |   |   |   |                      |           |           |                                        |           |           |                                      |        |        |                         |                                   |        |        |                                    |        |        |
|-------------------------------------------------------|-----------|------|---|---|---|----------------------|-----------|-----------|----------------------------------------|-----------|-----------|--------------------------------------|--------|--------|-------------------------|-----------------------------------|--------|--------|------------------------------------|--------|--------|
| Heater Model                                          | Heater kW |      | P | H | A | Heater Amps 208/230V |           |           | Minimum Circuit Ampacity<br>208/230V ☆ |           |           | Minimum Wire Size (AWG)<br>208/230V† |        |        | Min Gnd<br>Wire<br>Size | Max Fuse/Ckt Bkr Amps<br>208/230V |        |        | Max Wire Length 208/230V<br>(FT)†† |        |        |
|                                                       |           |      |   |   |   |                      |           |           |                                        |           |           |                                      |        |        |                         |                                   |        |        |                                    |        |        |
|                                                       | 230V      | 208V |   |   |   | S                    | L1, L2    | L3, L4    | L5, L6                                 | L1, L2    | L3, L4    | L5, L6                               | L1, L2 | L3, L4 |                         | L5, L6                            | L1, L2 | L3, L4 | L5, L6                             | L1, L2 | L3, L4 |
| EHK25AHCF‡                                            | 24        | 18.0 | 1 |   |   | 28.9/32.0            | 28.9/32.0 | 28.9/32.0 | 44.7/48.5                              | 36.2/40.0 | 36.2/40.0 | 8/8                                  | 8/8    | 8/8    | 10/10                   | 45/50                             | 40/40  | 59/60  | 73/73                              | 73/73  |        |
| EHK30AHCF‡                                            | 30        | 22.5 | 1 |   |   | 36.2/40.0            | 36.2/40.0 | 36.2/40.0 | 53.8/58.5                              | 45.3/50.0 | 45.3/50.0 | 6/6                                  | 8/8    | 8/8    | 10/10                   | 60/60                             | 50/50  | 78/80  | 59/59                              | 59/59  |        |

Notes:

- Copper wire must be used. If other than uncoated (non-plated), 75° C ambient, copper wire (solid wire for 10 AWG and smaller, stranded wire for larger than 10 AWG) is used, consult applicable tables of the National Electric Code (ANSI/NFPA 70).
- Includes blower motor amps of largest Fan Coil used with heater.
- Supplied as single phase, field convertible to 3-phase.
- Supplied as 3-phase, field convertible to single phase, single or multiple supply circuits.
- Length shown is as measured one way along wire path between unit and service panel for a voltage drop not to exceed 2%.

| <b>ACCESSORIES</b>                        |                                                                 |                                                         |
|-------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------------|
| <b>Part Number</b>                        | <b>Description</b>                                              | <b>Use with</b>                                         |
| EBAC01DSC                                 | Disconnect Kit                                                  | Use with All Heaters 5kW thru 10kW                      |
| EBAC04NCB                                 | Downflow Base Kit                                               |                                                         |
| EBAC02DFA                                 | Downflow Conversion Kit A-Coil                                  |                                                         |
| EBAC01SPK                                 | Single Point Wiring Kit                                         | Only for use with 15kW and 20kW fused heaters           |
| AMFK20SPA or Square D® part #QOU14100JBAF | Single Point Wiring Kit Square D® Jumper Bar Assembly           | Only for use with EHK15AKB and EHK20AKB breaker heaters |
| EBAC01FKX                                 | Filter Kit (washable, box of 12)                                | Filter Factory Supplied                                 |
| NASA00201FR                               | Standard Filter Rack (16 x 20 x 1 filter required)              | 30                                                      |
| NASA00301FR                               | Standard Filter Rack (20 x 20 x 1 filter required)              | 36, 42, 48                                              |
| NASA00401FR                               | Standard Filter Rack [quantity 2] (12 x 20 x 1 filter required) | 60                                                      |
| EBAC01PLG                                 | No Heat (Plug) Kit (box of 6)                                   | Factory Installed                                       |
| EBAC01CTK                                 | PVC Condensate Trap (box of 50)                                 |                                                         |
| EBAC01GSK                                 | Horizontal & Downflow Gasket Kit                                | Required for horizontal right and downflow              |

| <b>ELECTRIC HEATERS</b> |                                                                                              |
|-------------------------|----------------------------------------------------------------------------------------------|
| <b>Part Number</b>      | <b>Description</b>                                                                           |
| EHK05AKN                | 5 kW, single phase, no internal circuit protection                                           |
| EHK05AKB                | 5 kW, single phase, with circuit breakers                                                    |
| EHK07AKN                | 8 kW, single phase, no internal circuit protection                                           |
| EHK07AKB                | 8 kW, single phase, with circuit breakers                                                    |
| EHK09AKCN               | 9 kW, supplied as single phase, field convertible to 3-phase, no internal circuit protection |
| EHK10AKN                | 10 kW, single phase, no internal circuit protection                                          |
| EHK10AKB                | 10 kW, single phase, with circuit breakers                                                   |
| EHK15AKF                | 15 kW, single phase, with fuses                                                              |
| EHK15AKB                | 15 kW, single phase, with circuit breakers                                                   |
| EHK15AHN                | 15 kW, 3-phase, no internal circuit protection                                               |
| EHK18AHN                | 18 kW, 3-phase, no internal circuit protection                                               |
| EHK20AKF                | 20 kW, single phase, with fuses                                                              |
| EHK20AKB                | 20 kW, single phase, with circuit breakers                                                   |
| EHK25AHCF               | 2400 kW, supplied as 3-phase, field convertible to single phase, with fuses                  |
| EHK30AHCF               | 30 kW, supplied as 3-phase, field convertible to single phase, with fuses                    |