


COILS



Models EEA, EED, EPA, EPD, EPM EXA, EXD, EXM, & EAH

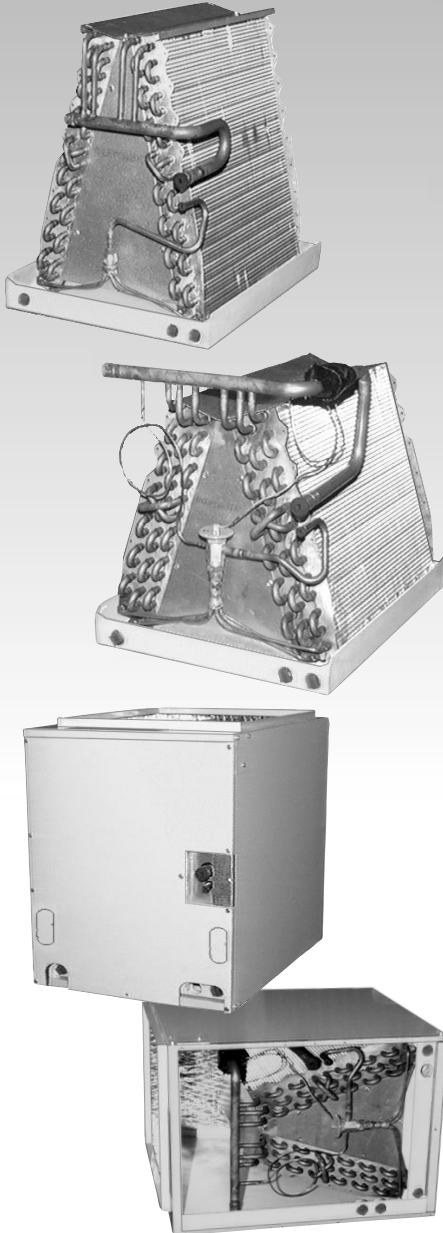

Representative photo only, some models may vary in appearance.



Rated in accordance with ARI Standards 210 & 240. Certification applies only when used with proper components as listed with ARI.

1 1/2 THRU 5 TON COILS

FEATURES

- Copper Tube/ Lanced Aluminum Fin Coil
- Three Primary Condensate Drain Connections
- Field Selectable Secondary Drain Location
- Polymer Thermoset Drain Pan (Except 5 Ton EXM/EPM Horizontal Pan)
- Sweat Connect
- Dry Air Holding Charge

UNCASED Models "A" Coils

- Upflow/Downflow Applications
- EEA, EPA Coils Feature Orifice Pin Refrigerant Metering
- EXA Coils Have Thermostatic Expansion Valves
- Thermostatic Expansion Valve Kit Available for Orifice Pin Coils
- Designed To Match EF Electric Furnaces

ORIFICE PIN Models "Cased Coils"

- EED - Entry Level Upflow / Downflow
- EPD - Upflow / Downflow
- EPM - Upflow / Downflow / Horizontal
- Orifice Pin Refrigerant Metering
- Upflow Cabinet Widths and Horizontal Cabinet Depths are Matched to 40" & 48" Gas Furnaces
- Cabinet Contains an "Uncased" Type Coil for Rating Purposes
- Internally Lined with Glass Fiber Insulation
- Painted Steel Cabinet
- Removable Front Access Panel

EXPANSION VALVE Models "Cased Coils"


- EXD - Upflow / Downflow
- EXM - Upflow / Downflow / Horizontal
- Thermostatic Expansion Valve Refrigerant Metering
- Upflow Cabinet Widths and Horizontal Cabinet Depths are Matched to 40" & 48" Gas Furnaces
- Cabinet Contains an "Uncased" Type Coil for Rating Purposes
- Internally Lined with Glass Fiber Insulation
- Prepainted Steel Cabinet
- Removable Front Access Panel

Slab Coils

- Horizontal Bi-directional Airflow Applications
- Refrigerant Flow Control Device
- Galvanized G-90 Steel Cabinet
- Cabinet Internally Lined with Glass Fiber Insulation
- Coated One Piece Galvanized Steel Drain Pan



DIMENSIONS - "A" COILS - EPA & EXA

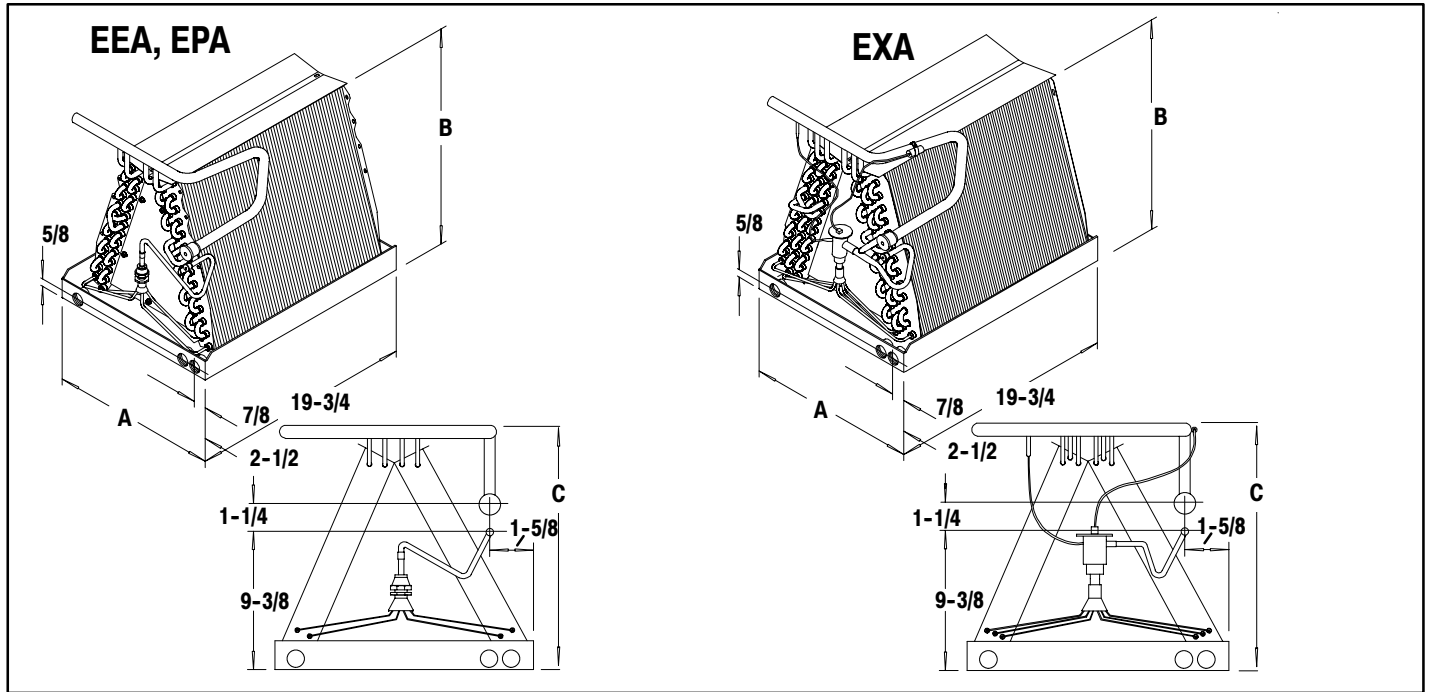


"A" COILS, EEA, EPA & EXA

Model No.	Dimensions (inches)				Weights		Refrigerant Control	Connection Sweat	
	A	B	C* (A1)	C* (A2)	Net	Shpg.		Liq.	Suc.
EEA24B15A	14-3/4	10-1/2	13-1/2	-	14	18	.053	5/16	3/4
EEA30B15A	14-3/4	14-1/2	-	-	17	21	.059	5/16	3/4
EEA36B15A	14-3/4	16-1/2	-	-	19	23	.065	5/16	3/4
EEA36F19A	18-1/8	16-1/8	-	-	22	26	.065	5/16	3/4
EEA42F19A	18-1/8	18-5/8	-	-	26	30	.072	5/16	3/4
EEA48F19A	18-1/8	18-1/2	-	-	30	34	.078	3/8	7/8
EEA60J22A	21-7/8	21-7/8	-	-	40	48	.079	3/8	7/8
EPA18B15A	14-3/4	10-1/2	13-1/2	-	14	18	.053	5/16	3/4
EPA24B15A*	14-3/4	14-1/2	16-1/2	14-1/2	17	21	.059	5/16	3/4
EXA24B15A*	14-3/4	14-1/2	16-1/2	14-1/2	20	25	TXV	5/16	3/4
EXA24F19A*	18-1/8	14-1/2	17-1/4	14-1/2	26	30	TXV	5/16	3/4
EPA30B15A*	14-3/4	16-1/2	18-1/4	16-1/2	19	23	.065	5/16	3/4
EPA30F19A*	18-1/8	16-1/8	18	16-1/8	22	26	.065	5/16	3/4
EPA36B15A	14-3/4	18-5/8	-	-	23	27	.072	5/16	3/4
EPA36F19A	18-1/8	18-5/8	-	-	26	30	.072	5/16	3/4
EPA36J22A	21-7/8	18	-	-	30	34	.072	5/16	3/4
EXA36F19A	18-1/8	18-1/2	-	-	31	35	TXV	5/16	3/4
EXA36J22A	21-7/8	17-1/2	-	-	32	37	TXV	5/16	3/4
EPA42F19A	18-1/8	18-1/2	-	-	30	34	.078	3/8	7/8
EPA42F19A	18-1/8	18-1/2	-	-	30	34	.078	3/8	7/8
EPA42J22A	21-7/8	18	-	-	35	40	.078	3/8	7/8
EXA42J22A	21-7/8	22-1/4	-	-	38	44	TXV	3/8	7/8
EPA48F19A	18-1/8	20-1/2	-	-	33	39	.079	3/8	7/8
EPA48J22A	21-7/8	21-7/8	-	-	40	48	.079	3/8	7/8
EPA48N26A	25-1/2	21-7/8	-	-	46	53	.079	3/8	7/8
EXA48N26A	25-1/2	26	-	-	48	55	TXV	3/8	7/8
EPA60J22A	21-7/8	26-1/4	-	-	43	50	.090	3/8	7/8
EPA60N26A	25-1/2	26	-	-	43	50	.090	3/8	7/8
EXA60N26A	25-1/2	26	-	-	59	68	TXV	3/8	7/8

NOTE: (1) EPA18B15A, EEA24B15A will not fit EF Series electric furnace.
 (2) 'C' Dimension, maximum height, applies only to coils shown. All other coils, the 'B' dimension is maximum height.

DIMENSIONS - DUAL PURPOSE UPFLOW / DOWNFLOW "EPD / EXD" COILS

EPD / EXD

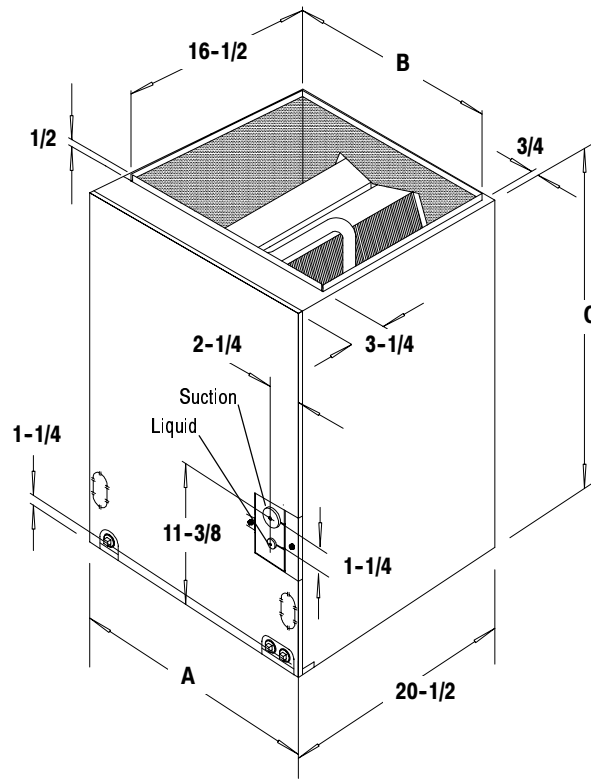

ALL DIMENSIONS IN INCHES

DUAL PURPOSE UPFLOW / DOWNFLOW COILS

Model No.	Dimensions (Inches)				Weights		Refrigerant Control	Connection	
	A	B	C* (A)	C* (B)	Net	Shpg		Liq. O.D.	Suc O.D.
EPD18B15A	15-1/2	14	15	-	19	23	.053	5/16	3/4
EPD24B15A/B*	15-1/2	14	22	18	27	31	.059	5/16	3/4
EXD24B15A/B*	15-1/2	14	22	18	33	37	TXV	5/16	3/4
EPD30B15A/B*	15-1/2	14	22	18	29	33	.065	5/16	3/4
EPD30F19A/B*	19-1/8	17-5/8	22	18	34	38	.065	5/16	3/4
EPD36B15A/B*	15-1/2	14	22	20	33	37	.072	5/16	3/4
EPD36F19A/B*	19-1/8	17-5/8	22	20	39	43	.072	5/16	3/4
EPD36J22A	22-3/4	21-1/4	24	-	44	48	.072	5/16	3/4
EXD36F19A/B*	19-1/8	17-5/8	22	20	38	42	TXV	5/16	3/4
EPD42F19A/B*	19-1/8	17-5/8	22	20	45	49	.078	3/8	7/8
EPD42J22A	22-3/4	21-1/4	24	-	50	54	.078	3/8	7/8
EXD42J22A	22-3/4	21-1/4	24	-	43	48	TXV	3/8	7/8
EPD48F19A**/B*	19-1/8	17-5/8	22**	20	47	52	.079	3/8	7/8
EPD48J22A	22-3/4	21-1/4	24	-	56	62	.079	3/8	7/8
EPD48N26A	26 3/8	24-7/8	24	-	56	62	.079	3/8	7/8
EXD48N26A	26 3/8	24-7/8	28	-	78	85	TXV	3/8	7/8
EPD60J22A	22-3/4	21-1/4	30	-	63	70	.090	3/8	7/8
EPD60N26A	26 3/8	24-7/8	28	-	78	85	.090	3/8	7/8
EXD60N26A	26 3/8	24-7/8	30	-	82	91	TXV	3/8	7/8


(1) Orifice Pin shown is installed at the time of manufacture.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

**"B" Models feature shorter cabinets **A1 30" tall cabinet, A2 22" tall cabinet

CASED HORIZONTAL COILS - EPM / EXM

EPM / EXM

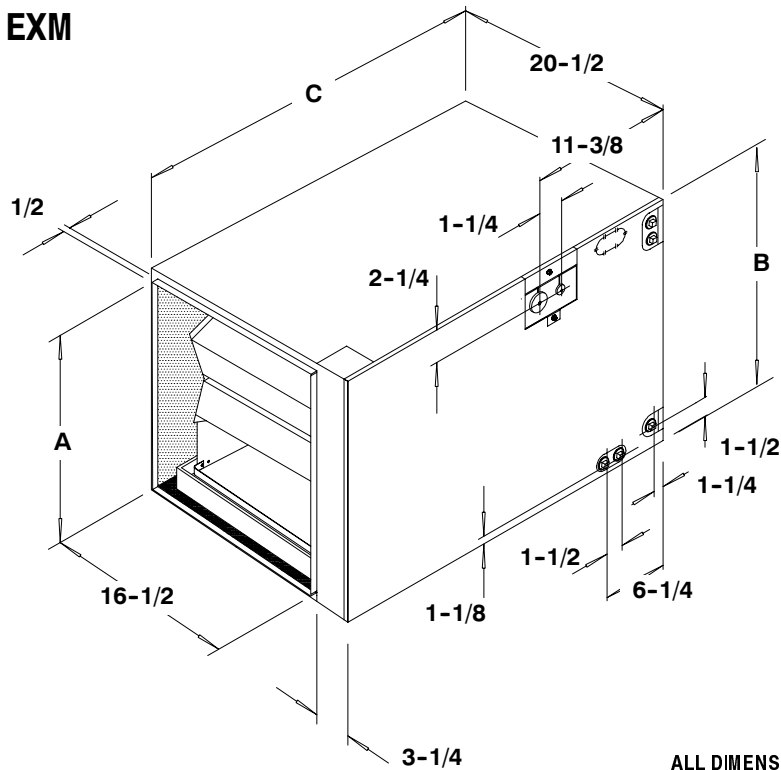


ALL DIMENSIONS IN INCHES

Model No.	Dimensions (Inches)			Weights		Refrigerant Control	Connection	
	A	B	C	Net	Shp		Sweat	
						Liq.	Suc.	
EPM24B15A	14	15-1/2	22	27	31	.059	5/16	3/4
EXM24B15A	14	15-1/2	22	33	37	TXV	5/16	3/4
EXM24F19A	17-5/8	19-1/8	22	33	37	TXV	5/16	3/4
EPM30B15A	14	15-1/2	22	29	33	.065	5/16	3/4
EPM30F19A	17-5/8	19-1/8	22	33	37	.065	5/16	3/4
EPM36B15A	14	15-1/2	22	33	37	.072	5/16	3/4
EPM36F19A	17-5/8	19-1/8	22	39	43	.072	5/16	3/4
EPM36J22A	21-1/4	22-3/4	22	38	42	.072	5/16	3/4
EXM36F19A	17-5/8	19-1/8	22	38	42	TXV	5/16	3/4
EXM36J22A	21-1/4	22-3/4	24	39	43	TXV	5/16	3/4
EPM42F19A	17-5/8	19-1/8	22	45	49	.078	3/8	7/8
EPM42J22A	21-1/4	22-3/4	24	50	54	.078	3/8	7/8
EXM42J22A	21-1/4	22-3/4	30	43	48	TXV	3/8	7/8
EPM48F19A	17-5/8	19-1/8	30	47	52	.079	3/8	7/8
EPM48J22A	21-1/4	22-3/4	30	56	62	.079	3/8	7/8
EPM48N26A	24-7/8	26-1/2	30	59	65	.079	3/8	7/8
EXM48N26A	24-7/8	26-1/2	30	78	85	TXV	3/8	7/8
EPM60J22A	21-1/4	22-3/4	33	63	70	.090	3/8	7/8
EPM60N26A	24-7/8	26-1/2	33	78	85	.090	3/8	7/8
EXM60N26A	24-7/8	26-1/2	33	87	96	TXV	3/8	7/8

DIMENSIONS - HORIZONTAL SLAB COIL

Model No.	Dimensions					Weights		Refrigerant Control	Connections "S"	
	A	B	C	D	E	Net	Ship.		Liq.	Suc.
	Width	Depth	Height							
EAH5524SA	7	22-1/4	24	15-1/8	18	34	40	.056	5/16"	3/4"
EAH5536SA	7	28-1/4	24	21-1/8	18	47	54	.071	5/16"	3/4"
EAH5548SA	7	41-3/4	24	34-5/8	18	59	67	.084	3/8"	7/8"
EAH5560SA	7	50-1/2	24	43-1/2	18	69	78	.089	3/8"	7/8"

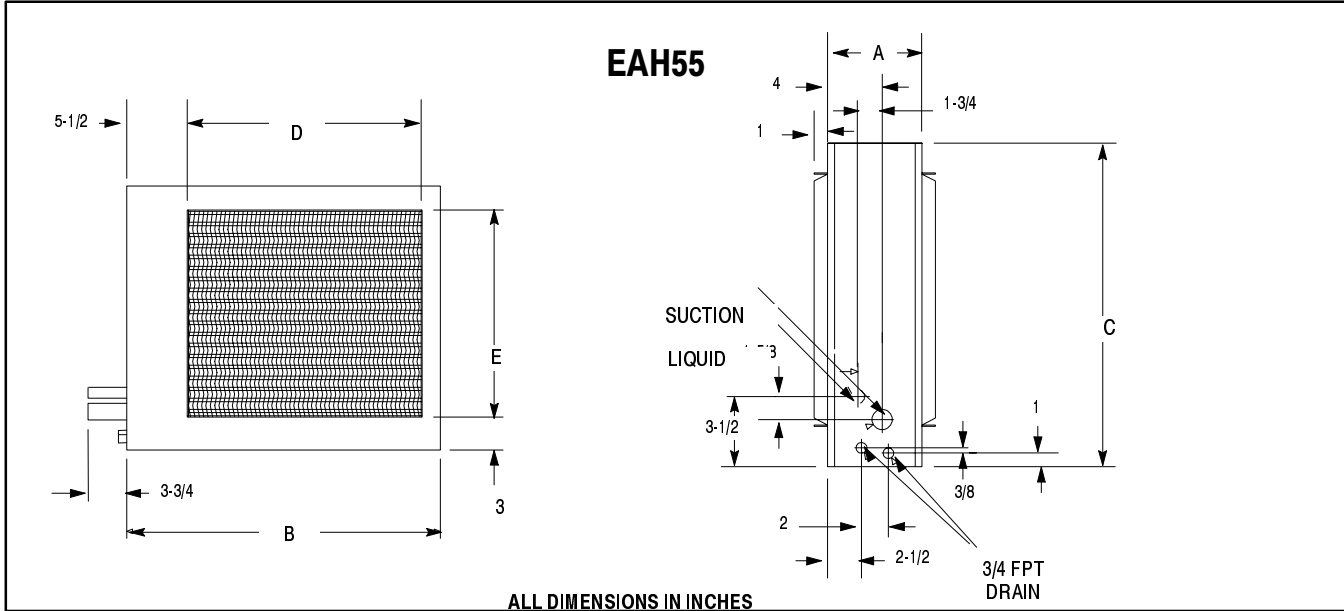


DIMENSIONS - Entry Level Cased Coil

Model No.	Dimensions (Inches)				Weights		Refrigerant Control	Connection	
	A	B	C* (A)	C* (B)	Net	Shpg		Liq.	Suc.
EED24B15A	15-1/2	14	15	-	19	23	.053	5/16	3/4
EED30B15A/B*	15-1/2	14	22	18	27	31	.059	5/16	3/4
EED36B15A/B*	15-1/2	14	22	18	29	33	.065	5/16	3/4
EED36F19A/B*	19-1/8	17-5/8	22	18	34	38	.065	5/16	3/4
EED42F19B*	19-1/8	17-5/8	22	20	39	43	.072	5/16	3/4
EED48F19A/B*	19-1/8	17-5/8	22	20	45	49	.078	3/8	7/8
EED60J22A	22-3/4	21-1/4	24	-	56	62	.079	3/8	7/8

*"B" Models feature shorter cabinets

EED Series

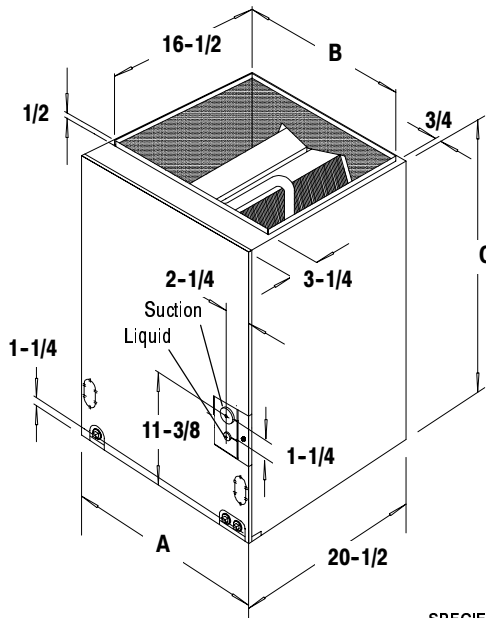

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

AIRFLOW PERFORMANCE DATA (CFM vs DRY/WET STATIC @ INCHES WATER COLUMN)

Model No.	400		500		600		700		800		900		1000		1100		1200		1300		1400		1500		1600		1700		1800		1900		2000				
	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet			
EP(A,D)18B	.06	.08	.09	.12	.13	.16	.18	.20	.23	.26																											
EP(A,D)24B				.11	.12	.14	.15	.18	.19	.23	.23	.25	.28	.30	.34																						
EX(A,D)24B,F				.12	.13	.17	.18	.20	.22	.25	.28	.30	.34	.40																							
EXM24B,F				.13	.16	.17	.20	.22	.26	.30	.32	.37	.38	.44																							
EEA.EED24B15			.09	.12	.13	.16	.18	.20	.23	.26	.28	.32																									
EAH5024			.06	.13	.10	.17	.13	.20	.17	.24	.21	.28	.25	.32																							
EP(A,D)30B									.18	.22	.22	.27	.28	.33	.33	.39	.46																				
EPM30B									.20	.23	.26	.29	.30	.35	.36	.43	.50																				
EP(A,D)30F									.13	.17	.16	.20	.19	.24	.22	.28	.26	.33																			
EPM30F									.14	.19	.17	.23	.23	.27	.24	.31	.28	.36																			
EEA.EED30B15			.11	.12	.14	.15	.18	.19	.23	.23	.27	.29	.32	.35																							
EP(A,D)36B									.18	.20	.22	.24	.27	.30	.32	.37	.44	.43	.50	.59																	
EPM36B									.19	.22	.24	.29	.29	.34	.35	.40	.42	.47	.48	.55	.63																
EP(A,D)36F,J												.19	.21	.21	.24	.25	.28	.29	.33	.37																	
EPM36F,J												.19	.23	.22	.27	.25	.31	.29	.35	.34	.40																
EX(A,D)36F											.18	.21	.21	.26	.25	.30	.29	.36	.34	.41																	
EXM36F											.19	.22	.23	.27	.28	.32	.32	.37	.42																		
EX(A,D)36J											.14	.20	.16	.23	.18	.26	.21	.30	.21	.33																	
EXM36J											.16	.23	.19	.27	.22	.31	.25	.36	.29	.41																	
EEA.EED36B15							.18	.22	.22	.27	.28	.33	.33	.39	.39	.46																					
EEA.EED36F19							.13	.17	.16	.20	.19	.24	.22	.28	.26	.33																					
EAH5036									.12	.16	.15	.19	.18	.22	.21	.25	.24	.28	.27	.31																	
EEA.EED42F											.19	.21	.21	.24	.25	.28	.29	.33	.33	.37																	
EP(A,D)42F											.21	.27	.25	.32	.29	.37	.33	.43	.33	.49																	
EPM42F											.22	.27	.26	.33	.30	.38	.35	.44	.40	.50																	
EP(A,D)42J											.18	.23	.21	.27	.24	.31	.26	.35																			
EPM42J											.18	.24	.20	.28	.24	.33	.26	.36																			
EX(A,D)42J											.19	.23	.22	.27	.26	.31	.30	.35	.34	.40																	
EXM42J											.18	.23	.21	.27	.24	.31	.28	.36	.33	.41																	
EP(A,D)48F											.20	.25	.23	.29	.27	.35	.32	.40	.36	.46	.41	.52	.47	.58													
EPM48F											.20	.25	.23	.29	.27	.35	.32	.40	.36	.46	.41	.52	.47	.58													
EP(A,D)48J											.21	.27	.25	.32	.29	.37	.33	.43	.33	.49																	
EPM48J											.22	.27	.26	.33	.30	.38	.35	.44	.40	.50																	
EP(A,D)48N											.18	.23	.21	.27	.24	.31	.26	.35																			
EPM48N											.18	.24	.20	.28	.24	.33	.26	.36																			
EX(A,D)48N											.19	.23	.22	.27	.26	.31	.30	.35	.34	.40																	
EXM48N											.18	.23	.21	.27	.24	.31	.28	.36	.33	.41																	
EEA.EED48F19											.21	.27	.25	.32	.29	.37	.33	.43	.33	.49																	
EAH5048											.11	.14	.12	.15	.14	.17	.15	.18	.17	.20	.19	.22	.21	.24	.22	.25	.24	.22	.25	.24	.22	.25	.24	.22	.25	.24	
EP(A,D)60J																		.16	.19	.18	.21	.21	.26	.28	.29	.26	.34	.30	.37	.46	.40	.51					
EPM60J																		.21	.25	.24	.29	.27	.33	.30	.37	.33	.41	.37	.46	.40	.51						
EP(A,D)60N																		.20	.24	.23	.28	.25	.31	.28	.25	.31	.28	.35	.31	.38	.35	.43					
EPM60N																		.20	.24	.22	.28	.25	.31	.28	.25	.31	.28	.35	.31	.38	.34	.42					
EX(A,D)60N																		.18	.22	.21	.25	.24	.29	.27	.34	.30	.38	.34	.42	.37	.47						
EXM60N																		.19	.24	.22	.27	.25	.31	.28	.35	.32	.39	.36	.44	.40	.49						
EEA.EED60J22																		.21	.25	.24	.28	.28	.33	.31	.37	.35	.42	.38	.46								
EAH5060																		.12	.16	.14	.18	.16	.20	.17	.20	.19	.22	.21	.24	.22	.25	.24	.22	.25	.24		

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



International Comfort Products Corporation (USA)
650 Heil Quaker Avenue
Lewisburg, Tn. 37091

RESIDENTIAL AND COMMERCIAL SYSTEMS • SPLIT SYSTEMS • PACKAGED AIR CONDITIONERS •
COMBINATION GAS / ELECTRIC UNITS • HEAT PUMPS • AIR HANDLERS • MANUFACTURED HOME AIR
CONDITIONERS • GAS, OIL AND ELECTRIC FURNACES