



16 SEER SINGLE STAGE AIR CONDITIONER WITH OBSERVER™ COMMUNICATING CONTROL SYSTEM

1½ THRU 5 TONS SPLIT SYSTEM — 208 / 230 Volt, 1-phase, 60 Hz

REFRIGERATION CIRCUIT

- Copeland Scroll® compressors on all models
- Filter-drier supplied with every unit for field installation
- External high and low refrigerant service ports
- Copper tube / aluminum fin coil

PERFORMANCE

- Communicating, self-configuring operation when used with Observer Wall Control (TSTAT0201CW)
- Outdoor temperature sensor factory installed
- Compressor sound blanket standard
- Isolation compressor grommets

EASY TO INSTALL AND SERVICE

- Text based diagnostics with Observer Communicating Wall Control
- Easy access service valves on all models
- Innovative control box design
- High and low pressure switches
- Only two screws to access control panel
- Factory charged with R-410A refrigerant

BUILT TO LAST

- High gloss, baked-on powder coat finish over galv. steel
- Post-painted (black) coil fins
- Coated, weather-resistant cabinet screws
- Coated inlet grille with 3/8" (10mm) spacing for extra protection
- Corner posts for extra strength and style

LIMITED WARRANTY*

- 5-year No Hassle Replacement™ limited warranty
- 5-year parts limited warranty (include compressor & coil)
 - With timely registration, an additional 5-year parts limited warranty (including compressor and coil)

* For owner occupied, residential applications only. See warranty certificate for complete details and restrictions, including warranty coverage for other applications.



TSTAT0201CW
Recommended
(sold separately)





Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.

| Model Number | Size (tons) | Nominal Btu/hr | Min. Circuit Ampacity | Max. Fuse or Breaker | Operating Dimensions height x width x depth in. (mm) | Ship / Operating Weight lbs. (kg) |
|--------------|-------------|----------------|-----------------------|----------------------|--|-----------------------------------|
| CSA618GKA | 1½ | 18,000 | 11.8 | 20 | 28-11/16 x 31-3/16 x 31-3/16 (729 x 792 x 792) | 213 / 176 (96 / 80) |
| CSA624GKA | 2 | 24,000 | 17.6 | 25 | 28-11/16 x 31-3/16 x 31-3/16 (729 x 792 x 792) | 212 / 176 (96 / 80) |
| CSA630GKA | 2½ | 30,000 | 16.7 | 25 | 32-1/8 x 31-3/16 x 31-3/16 (816 x 792 x 792) | 223 / 187 (101 / 85) |
| CSA636GKA | 3 | 36,000 | 18.1 | 30 | 30-1/16 x 35 x 35 (764 x 889 x 889) | 243 / 200 (110 / 91) |
| CSA642GKA | 3½ | 42,000 | 23.6 | 40 | 40-1/4 x 35 x 35 (1023 x 889 x 889) | 297 / 253 (135 / 115) |
| CSA648GKA | 4 | 48,000 | 26.1 | 40 | 40-1/4 x 35 x 35 (1023 x 889 x 889) | 340 / 295 (155 / 114) |
| CSA660GKA | 5 | 60,000 | 28.0 | 40 | 47-1/16 x 35 x 35 (1196 x 889 x 889) | 374 / 327 (169 / 148) |

| OUTDOOR UNIT MODEL NUMBER IDENTIFICATION GUIDE (single phase) | | | | | | | | | | | |
|--|----------|----------|----------|----------|-----------|----------|----------|----------|----------|----------|----------|
| Digit Position: | 1 | 2 | 3 | 4 | 5, 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| Example Part Number: | C | S | A | 6 | 18 | G | K | A | 1 | 0 | 0 |
| C = Comfortmaker Mainline N = Comfortmaker Entry BRANDING | | | | | | | | | | | |
| S = Single Stage Communicating KEY CHARACTERISTIC | | | | | | | | | | | |
| A = Air Conditioner H = Heat Pump TYPE | | | | | | | | | | | |
| 3 = 13 SEER 4 = 14 SEER 5 = 15 SEER 6 = 16 SEER 7 = 17 SEER 8 = 18 SEER NOMINAL EFFICIENCY | | | | | | | | | | | |
| 18 = 18,000 BTUH = 1½ tons 24 = 24,000 BTUH = 2 tons 30 = 30,000 BTUH = 2½ tons 36 = 36,000 BTUH = 3 tons 42 = 42,000 BTUH = 3½ tons 48 = 48,000 BTUH = 4 tons 60 = 60,000 BTUH = 5 tons NOMINAL CAPACITY | | | | | | | | | | | |
| A = Standard Grille G = Coil Guard Grille C = Coastal FEATURES | | | | | | | | | | | |
| K = 208/230-1-60 VOLTAGE | | | | | | | | | | | |
| Sales Code | | | | | | | | | | | |
| Engineering Revision | | | | | | | | | | | |
| Extra Digit | | | | | | | | | | | |
| Extra Digit | | | | | | | | | | | |

| ACCESSORIES PART NUMBER IDENTIFICATION GUIDE | | | | | | | | | |
|--|----------|----------|----------|----------|----------|-----------|-----------|-----------|--|
| Digit Position: | 1 | 2 | 3 | 4 | 5 | 6, 7 | 8, 9 | 10, 11 | |
| Example Part Number: | N | A | S | A | 0 | 01 | 01 | CH | |
| N = Non-Branded | | | | | | | | | |
| A = Accessory PRODUCT GROUP | | | | | | | | | |
| S = Split System (AC & HP) KIT USAGE | | | | | | | | | |
| A = Original B = 2nd Generation MAJOR SERIES | | | | | | | | | |
| 0 = Generic or Not Applicable 2 = R-22 4 = R-410A REFRIGERANT | | | | | | | | | |
| Product Identifier Number | | | | | | | | | |
| Package Quantity | | | | | | | | | |
| Type of Kit (Example: CH = Crankcase Heater) | | | | | | | | | |

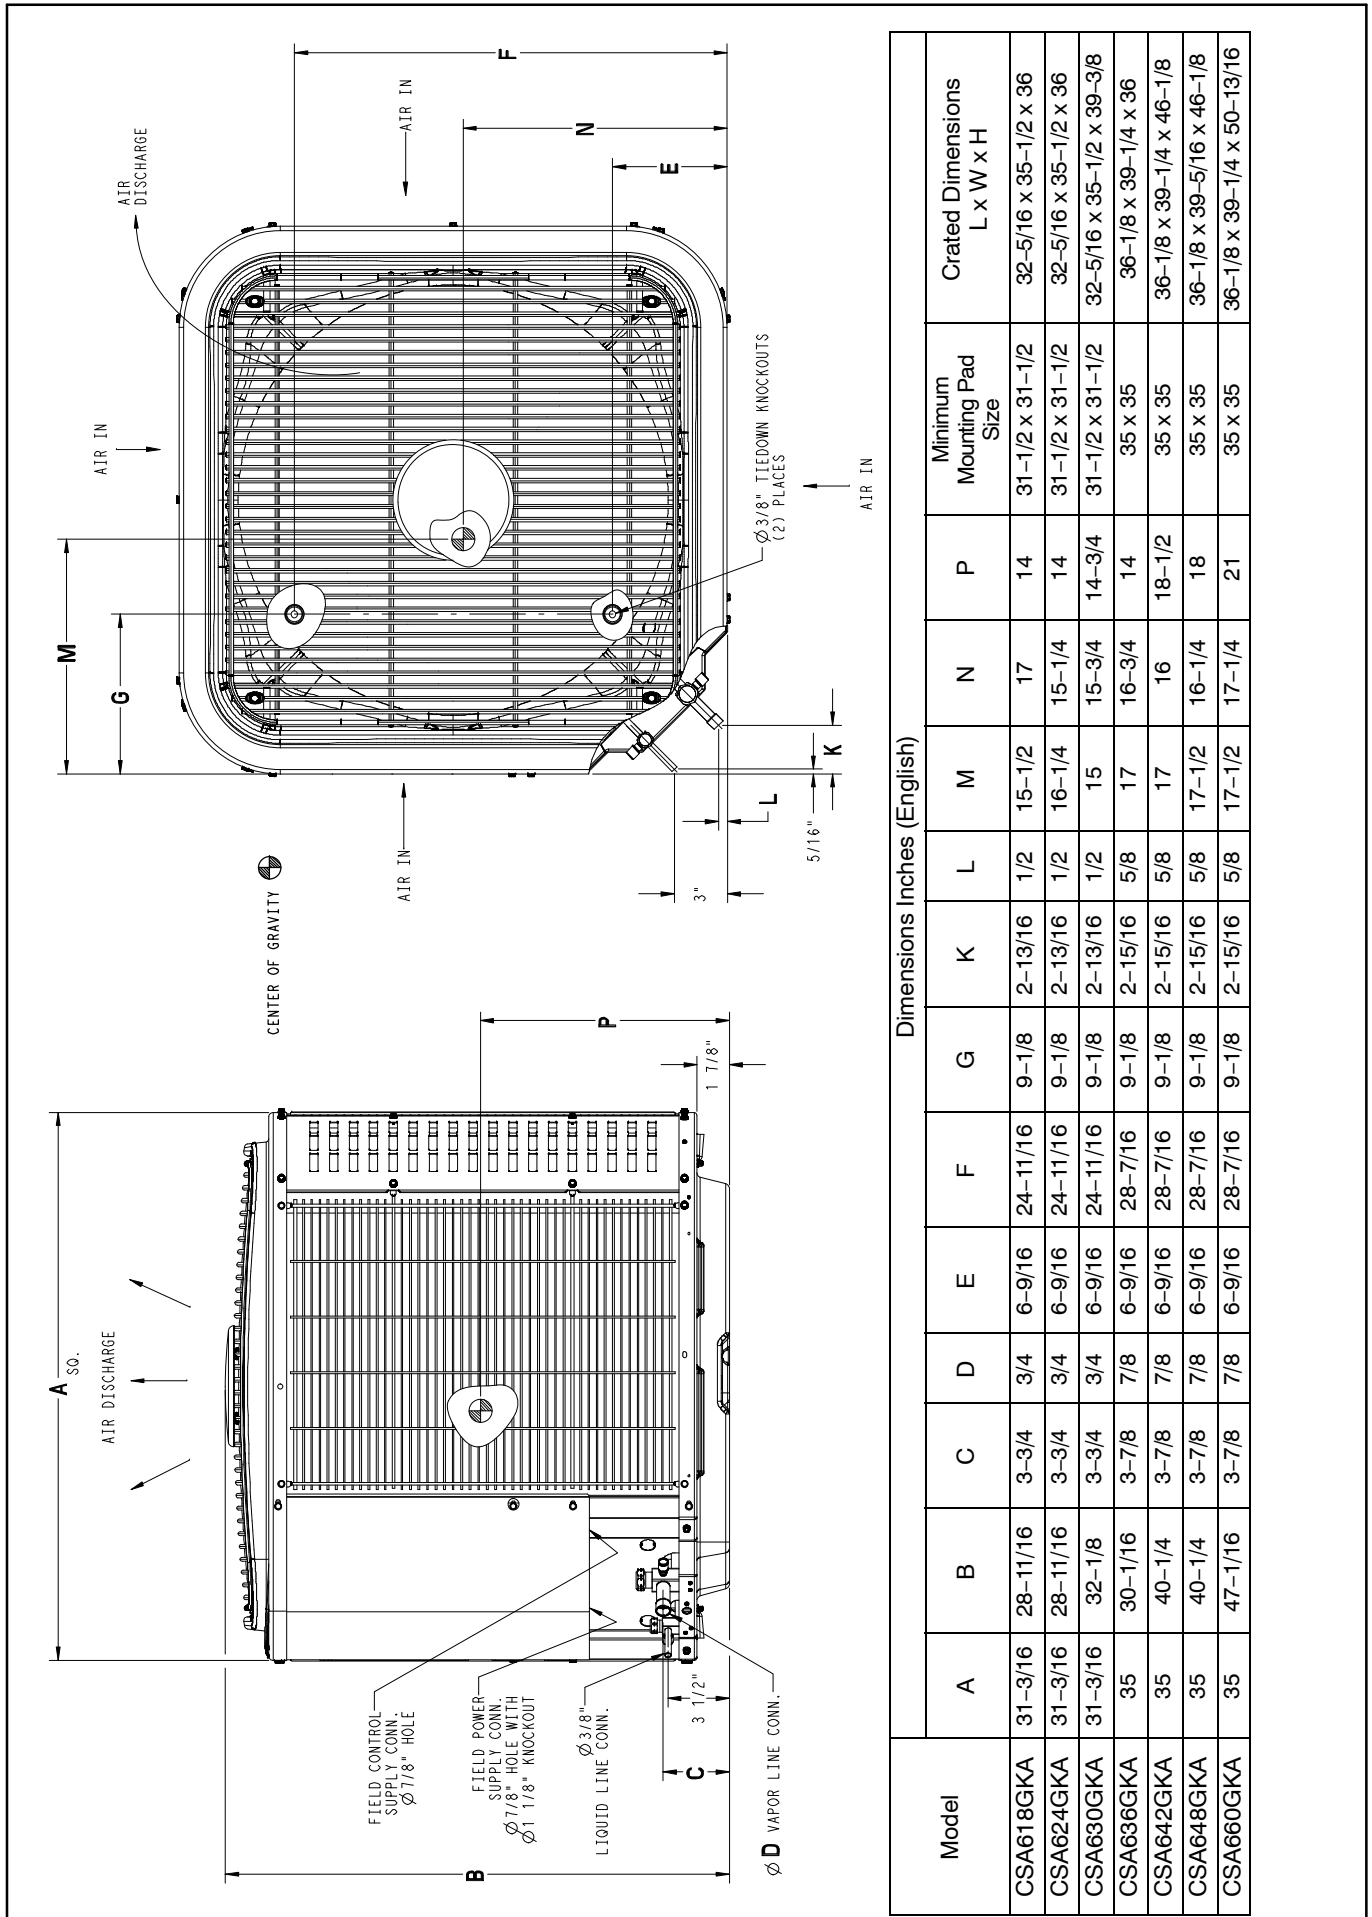

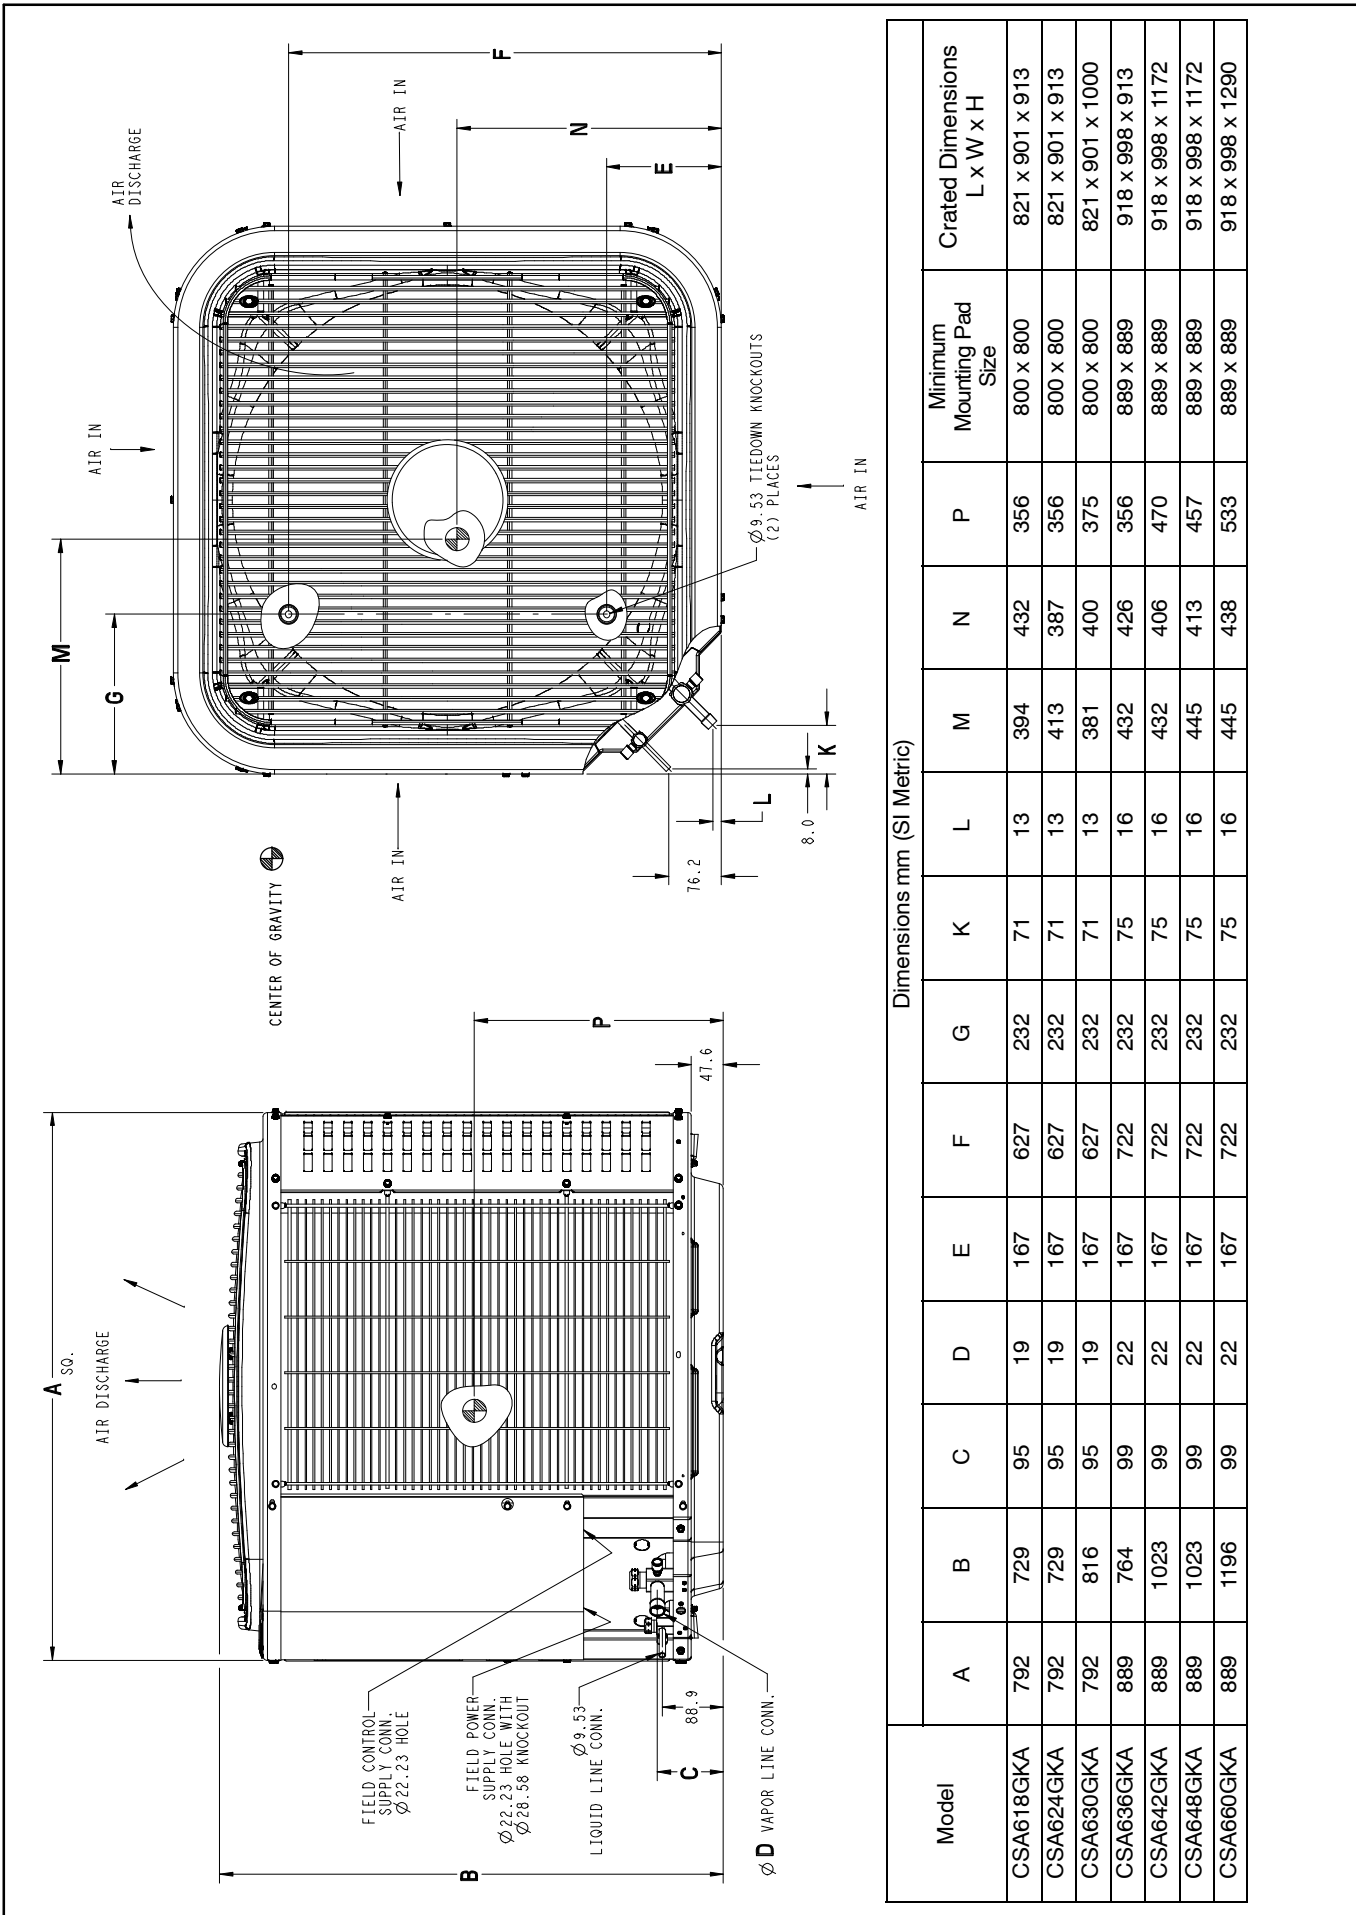

Dimensions mm (SI Metric)

| Model | A | B | C | D | E | F | G | K | L | M | N | P | Minimum Mounting Pad Size | Crated Dimensions L x W x H |
|-----------|-----|------|----|----|-----|-----|-----|----|----|-----|-----|-----|---------------------------|-----------------------------|
| CSA618GKA | 792 | 729 | 95 | 19 | 167 | 627 | 232 | 71 | 13 | 394 | 432 | 356 | 800 x 800 | 821 x 901 x 913 |
| CSA624GKA | 792 | 729 | 95 | 19 | 167 | 627 | 232 | 71 | 13 | 413 | 387 | 356 | 800 x 800 | 821 x 901 x 913 |
| CSA630GKA | 792 | 816 | 95 | 19 | 167 | 627 | 232 | 71 | 13 | 381 | 400 | 375 | 800 x 800 | 821 x 901 x 1000 |
| CSA636GKA | 889 | 764 | 99 | 22 | 167 | 722 | 232 | 75 | 16 | 432 | 426 | 356 | 889 x 889 | 918 x 998 x 913 |
| CSA642GKA | 889 | 1023 | 99 | 22 | 167 | 722 | 232 | 75 | 16 | 432 | 406 | 470 | 889 x 889 | 918 x 998 x 1172 |
| CSA648GKA | 889 | 1023 | 99 | 22 | 167 | 722 | 232 | 75 | 16 | 445 | 413 | 457 | 889 x 889 | 918 x 998 x 1172 |
| CSA660GKA | 889 | 1196 | 99 | 22 | 167 | 722 | 232 | 75 | 16 | 445 | 438 | 533 | 889 x 889 | 918 x 998 x 1290 |

| PHYSICAL DATA | | | | | | | |
|----------------------------|------------------------------|----------------|----------------|----------------|----------------|----------------|-----------------|
| Model Size | 18 | 24 | 30 | 36 | 42 | 48 | 60 |
| Compressor Type | Scroll | | | | | | |
| REFRIGERANT | R-410A | | | | | | |
| Control | TXV (R-410A Hard shutoff) | | | | | | |
| Charge lb (Kg) | 5.25 (2.38) | 6.00 (2.72) | 6.81 (3.09) | 6.75 (3.06) | 8.62 (3.91) | 13.00 (5.9) | 14.50 (6.58) |
| COND FAN | Propeller Type, Direct Drive | | | | | | |
| Air Discharge | Vertical | | | | | | |
| Air Qty (CFM) | 2233 | 2614 | 2614 | 3223 | 3810 | 4046 | 4046 |
| Motor HP | 1/12 | 1/10 | 1/10 | 1/12 | 1/5 | 1/4 | 1/4 |
| Motor RPM | 800 | 800 | 800 | 800 | 800 | 800 | 800 |
| COND COIL | | | | | | | |
| Face Area (Sq ft) | 15.07 | 15.07 | 17.22 | 17.58 | 25.12 | 25.12 | 30.14 |
| Fins per In. | 25 | 25 | 25 | 25 | 25 | 20 | 20 |
| Rows | 1 | 1 | 1 | 1 | 1 | 2 | 2 |
| Circuits | 3 | 4 | 4 | 4 | 6 | 7 | 8 |
| VALVE CONNECT. (In. ID) | | | | | | | |
| Vapor | 3/4 | 3/4 | 3/4 | 7/8 | 7/8 | 7/8 | 7/8 |
| Liquid | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 |
| REFRIGERANT TUBES (In. OD) | | | | | | | |
| Rated Vapor* | 3/4 | | | 7/8 | | | 1-1/8 |
| Max Liquid Line | 3/8" | | | | | | |

* Units are rated with 25 ft (7.6 m) of lineset length. See Vapor Line Sizing and Cooling Capacity Loss table when using other sizes and lengths of lineset.

| ELECTRICAL DATA | | | | | | | | | | | | |
|-----------------|--------------|------------------|-----|------------|------|-----|------|----------------|----------------|--------------------|--------------------|----------------------------|
| UNIT SIZE | V/PH/Hz | Operating Volts* | | Compressor | | Fan | MCA | Min-Wire Size† | Min-Wire Size† | Max Length ft (m)‡ | Max Length ft (m)‡ | Max Fuse** or Ckt Brk AMPS |
| | | Max | Min | LRA | RLA | FLA | | 60° C | 75° C | 60° C | 75° C | |
| 18 | 208-230/1/60 | 253 | 197 | 48.0 | 9.0 | 0.5 | 11.8 | 14 | 14 | 66 (20.12) | 62 (18.90) | 20 |
| 24 | | | | 58.3 | 13.5 | 0.7 | 17.6 | 14 | 14 | 44 (13.41) | 42 (12.80) | 25 |
| 30 | | | | 64.0 | 12.8 | 0.5 | 16.7 | 14 | 14 | 46 (14.02) | 44 (13.41) | 25 |
| 36 | | | | 77.0 | 14.1 | 0.5 | 18.1 | 14 | 14 | 44 (13.41) | 42 (12.80) | 30 |
| 42 | | | | 112.0 | 17.9 | 1.2 | 23.6 | 12 | 12 | 52 (15.85) | 50 (15.24) | 40 |
| 48 | | | | 109.0 | 19.9 | 1.2 | 26.1 | 10 | 10 | 77 (23.47) | 73 (22.25) | 40 |
| 60 | | | | 135.0 | 21.4 | 1.2 | 28.0 | 10 | 10 | 71 (21.64) | 68 (20.73) | 40 |

* Permissible limits of the voltage range at which the unit will operate satisfactorily

† If wire is applied at ambient greater than 30°C, consult table 310-16 of the NEC (NFPA 70). The ampacity of non-metallic-sheathed cable (NM), trade name ROMEX, shall be that of 60°C conditions, per the NEC (NFPA 70) Article 336-26. If other than uncoated (no-plated), 60 or 75°C insulation, copper wire (solid wire for 10 AWG or smaller, stranded wire for larger than 10 AWG) is used, consult applicable tables of the NEC (NFPA 70).

‡ Length shown is as measured one way along wire path between unit and service panel for voltage drop not to exceed 2%.

** Time-Delay fuse.

FLA - Full Load Amps

LRA - Locked Rotor Amps

MCA - Minimum Circuit Amps

RLA - Rated Load Amps

NOTE: Control circuit is 24-V on all units and requires external power source. Copper wire must be used from service disconnect to unit.

All motors/compressors contain internal overload protection.

Complies with 2007 requirements of ASHRAE Standards 90.1

| A-WEIGHTED SOUND POWER (dBA) | | | | | | | | |
|------------------------------|-----------------|--|------|------|------|------|------|------|
| UNIT SIZE - SERIES | STANDARD RATING | TYPICAL OCTAVE BAND SPECTRUM (without tone adjustment) | | | | | | |
| | | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
| 18 | 69 | 53.0 | 58.0 | 62.5 | 63.0 | 60.5 | 58.0 | 48.5 |
| 24 | 69 | 49.0 | 57.0 | 62.5 | 62.5 | 59.0 | 56.5 | 49.5 |
| 30 | 70 | 53.5 | 56.0 | 62.5 | 64.5 | 62.0 | 57.0 | 49.5 |
| 36 | 70 | 54.5 | 64.5 | 69.5 | 70.0 | 68.0 | 65.5 | 60.0 |
| 42 | 72 | 61.0 | 67.5 | 72.5 | 73.5 | 71.0 | 67.5 | 62.0 |
| 48 | 72 | 56.5 | 60.0 | 63.5 | 64.5 | 61.0 | 58.5 | 51.0 |
| 60 | 72 | 55.0 | 63.0 | 67.5 | 71.5 | 68.0 | 64.0 | 60.5 |

NOTE: Tested in accordance with AHRI Standard 270-08 (not listed in AHRI).

CHARGING SUBCOOLING (TXV-TYPE EXPANSION DEVICE)

| UNIT SIZE-SERIES | REQUIRED SUBCOOLING °F (°C) |
|------------------|-----------------------------|
| 18 | 10 (5.6) |
| 24 | 10 (5.6) |
| 30 | 10 (5.6) |
| 36 | 10 (5.6) |
| 42 | 9 (5.0) |
| 48 | 10 (5.6) |
| 60 | 9 (5.0) |

REFRIGERANT CHARGE ADJUSTMENTS

| Liquid Line Size | R-410A Charge oz/ft |
|------------------|---|
| 3/8 | 0.60 (Factory charge for lineset = 9 oz) |
| 5/16 | 0.40 |
| 1/4 | 0.27 |

Units are factory charged for 15 ft (4.6 m) of 3/8" liquid line. The factory charge for 3/8" lineset 9 oz. When using other length or diameter liquid lines, charge adjustments are required per the chart above.

Charging Formula:

$[(\text{Lineset oz/ft} \times \text{total length}) - (\text{factory charge for lineset})] = \text{charge adjustment}$

Example 1: System has 15 ft of line set using existing 1/4" liquid line. What charge adjustment is required?

Formula: $(.27 \text{ oz/ft} \times 15\text{ft}) - (9 \text{ oz}) = (-4.95) \text{ oz.}$

Net result is to remove 4.95 oz of refrigerant from the system

Example 2: System has 45 ft of existing 5/16" liquid line. What is the charge adjustment?

Formula: $(.40 \text{ oz/ft.} \times 45\text{ft}) - (9 \text{ oz.}) = 9 \text{ oz.}$

Net result is to add 9 oz of refrigerant to the system

LONG LINE APPLICATIONS

An application is considered Long Line, when the refrigerant level in the system requires the use of accessories to maintain acceptable refrigerant management for systems reliability. See Accessory Usage Guideline table for required accessories. Defining a system as long line depends on the liquid line diameter, actual length of the tubing, and vertical separation between the indoor and outdoor units. For Air Conditioner systems, the charts below shows when an application requires a TXV and long line accessories due to lineset length.

AC with R-410A Refrigerant Long Line Description ft (m) Beyond these lengths, a TXV is required

| Total Length | Outdoor Unit Above or Below Indoor Unit |
|-------------------------------------|---|
| TXV required beyond 50 ft. (15.2 m) | TXV required beyond 20 ft. (6.1 m) |

AC with R-410A Refrigerant Long Line Description ft (m) (Beyond these lengths, long line accessories are required)

| Liquid Line Size | Units On Same Level | Outdoor Below Indoor | Outdoor Above Indoor |
|------------------|--|--|----------------------|
| 1/4 + TXV | No accessories needed within allowed lengths | No accessories needed within allowed lengths | 175 (53.3) |
| 5/16 + TXV | 120 (36.6) | 50 (15.2) vertical or 120 (36.6) total | 120 (36.6) |
| 3/8 + TXV | 80 (24.4) | 35 (10.7) vertical or 80 (24.4) total | 80 (24.4) |

VAPOR LINE SIZING AND COOLING CAPACITY LOSS

Acceptable vapor line diameters provide adequate oil return to the compressor while avoiding excessive capacity loss. The suction line diameters shown in the chart below are acceptable for AC systems with R-410A refrigerant:

Vapor Line Sizing and Cooling Capacity Losses — R-410A Refrigerant 1-Stage Air Conditioner Applications

| Unit Nominal Size (Btuh) | Maximum Liquid Line Diameters (In. OD) | Vapor Line Diameters (In. OD) | Cooling Capacity Loss (%) | | | | | | | | |
|--|--|-------------------------------|--------------------------------------|----------------------|-----------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| | | | Total Equivalent Line Length ft. (m) | | | | | | | | |
| | | | 26-50 (7.9-15.2) | 51-80 (15.5-24.4) | 81-100 (24.7-30.5) | 101-125 (30.8-38.1) | 126-150 (38.4-45.7) | 151-175 (46.0-53.3) | 176-200 (53.6-61.0) | 201-225 (61.3-68.6) | 226-250 (68.9-76.2) |
| 018 1 Stage AC with R-410A | 3/8 | 1/2 | 1 | 2 | 3 | 5 | 6 | 7 | 8 | 9 | 11 |
| | | 5/8 | 0 | 1 | 1 | 1 | 2 | 2 | 3 | 3 | |
| | | 3/4 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 |
| 024 1 Stage AC with R-410A | 3/8 | 5/8 | 0 | 1 | 2 | 2 | 3 | 3 | 4 | 5 | 5 |
| | | 3/4 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 2 | 2 |
| | | 7/8 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |
| 030 1 Stage AC with R-410A | 3/8 | 5/8 | 1 | 2 | 3 | 3 | 4 | 5 | 6 | 7 | 8 |
| | | 3/4 | 0 | 0 | 1 | 1 | 1 | 2 | 2 | 2 | 3 |
| | | 7/8 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 |
| 036 1 Stage AC with R-410A | 3/8 | 5/8 | 1 | 2 | 4 | 5 | 6 | 8 | 9 | 10 | 12 |
| | | 3/4 | 0 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 |
| | | 7/8 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 2 | 2 |
| 042 1 Stage AC with R-410A | 3/8 | 3/4 | 0 | 1 | 2 | 2 | 3 | 4 | 4 | 5 | 6 |
| | | 7/8 | 0 | 0 | 1 | 1 | 1 | 2 | 2 | 2 | 3 |
| | | 1 1/8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 048 1 Stage AC with R-410A | 3/8 | 3/4 | 0 | 1 | 2 | 3 | 4 | 5 | 5 | 6 | 7 |
| | | 7/8 | 0 | 0 | 1 | 1 | 2 | 2 | 2 | 3 | 3 |
| | | 1 1/8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 060, 061 1 Stage AC with R-410A | 3/8 | 3/4 | 1 | 2 | 4 | 5 | 6 | 7 | 9 | 10 | 11 |
| | | 7/8 | 0 | 1 | 2 | 2 | 3 | 4 | 4 | 5 | 5 |
| | | 1 1/8 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |

Consult the Long Line Application Guideline document before purchasing/installing line sets.

Applications in shaded area may have height restrictions that limit allowable total equivalent length when outdoor unit is below indoor unit.

| Unit Size | Indoor Model | Furnace Model | AHRI Standard Ratings | | | | | |
|-----------|-------------------|---------------|-----------------------|-----------------|------|------|--|------|
| | | | Cooling 95° F (35°C) | | | | | |
| | | | Capacity | Factory Enhance | SEER | | | EER |
| Standard | W/ Field TDR | W/ Field TXV | | | | | | |
| CSA618GKA | *EN(A,D)4X19*17** | | 18800 | TXV | | 14.5 | | 12.2 |
| CSA624GKA | *EN(A,D)4X31*17** | | 23600 | TXV | | 14.5 | | 12 |
| CSA630GKA | *EN(A,D)4X31*17** | | 28400 | TXV | | 14.5 | | 12 |
| CSA636GKA | *EN(A,D)4X37*17** | | 34400 | TXV | | 14.5 | | 12 |
| CSA642GKA | *EN(A,D)4X43*24** | | 42000 | TXV | | 14.5 | | 12 |
| CSA648GKA | *EN(A,D)4X61*24** | | 46500 | TXV | | 14.5 | | 12.5 |
| CSA660GKA | *EN(A,D)4X61*24** | | 55000 | TXV | | 14.5 | | 12.5 |

† For coils not listed with a matching furnace or blower, coil rating applies with any indoor blower device.

TESTED AHRI COMBINATION RATINGS*

NOTE: Ratings contained in this document are subject to change at any time.

For AHRI ratings certificates, please refer to the AHRI directory. www.ahridirectory.org

Additional ratings and system combinations can be accessed via the Comfortmaker database:

<http://www.icpeqp.com/AHRIratings/ratings.aspx?Brand=Comfortmaker>

Or scan this QR code:



ACCESSORY USAGE GUIDELINES

| Accessory | REQUIRED FOR LOW-AMBIENT APPLICATIONS {Below 55°F (13°C)} | REQUIRED FOR LONG-LINE APPLICATIONS* |
|------------------------------------|---|---|
| Crankcase Heater | Yes | Yes |
| Evaporator Freeze Thermostat | Yes | No |
| Winter Start Control | Yes** | No |
| TXV | Yes | Yes‡ |
| Hard Start Kit (Capacitor & Relay) | Yes | Yes |
| Low Ambient Kit (Pressure Switch) | Yes | No |
| Support Feet, 4" (102mm) tall | Recommended | No |

* Refer to the Long Line Application Guideline document.

** Can only be installed in conjunction with the Low Pressure Switch

‡ TXV required beyond 20 ft (6.1m) vertical separation or 50 ft (15.2) total length.

ACCESSORIES

| Part Number | Description | Used On Model Size |
|-------------|--|-----------------------|
| NASA003CH | Crankcase Heater for Scroll Compressor (208/230 V) | 18, 24, 30, 36 |
| NASA001CH | Crankcase Heater for Scroll Compressor (208/230 V) | 42, 48, 60* |
| NASA001SC | Start Component – PTC Device | ALL |
| NASA00201FS | Evaporator Freeze Thermostat | ALL |
| NASA401LS | Liquid Line Solenoid Valve, R-410A | ALL |
| NASA001TD | Time Delay Relay, Indoor Blower | ALL |
| NASA00201WS | Winter Start Control | ALL |
| NASA001AC | Anti-Cycle Timer (5 minute delay) | ALL |
| NASA014SC | Hard Start Kit (Capacitor & Relay) | ALL |
| NASA401LA | Low Ambient Kit (Pressure Switch), R-410A | ALL |
| NASA001SF | Support Feet, 4" (102mm) tall | ALL |
| NAEA40501TX | TXV Kit, R-410A – 2010 and later Piston Coils | 18, 24, 30 |
| NAEA40601TX | TXV Kit, R-410A – 2010 and later Piston Coils | 36, 42 |
| NAEA40701TX | TXV Kit, R-410A – 2010 and later Piston Coils | 48, 60 |
| EBAC05TXVX | TXV Kit, R-410A – 2005–2009 R-22 TXV Fancoils (air handlers) | 18, 24, 30 |
| EBAC06TXVX | TXV Kit, R-410A – 2005–2009 R-22 TXV Fancoils (air handlers) | 36, 42 |
| EBAC07TXVX | TXV Kit, R-410A – 2005–2009 R-22 TXV Fancoils (air handlers) | 48, 60 |
| TSTAT0101SC | Observer™ Self Configuring Communication Wall Control | ALL |

*Some models may be factory installed.