& berlinger




QUICK INFO - SET UP

Fridge-tag 2L

Packaging content



2 Fridge-tag information

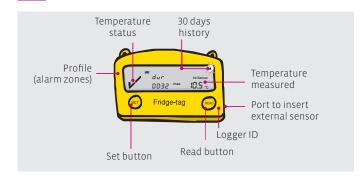

3 State of delivery

You receive the Fridge-tag in sleep mode. The display (LCD) is blank.



Note: If required note the date of activation on the back of the Fridge-tag.

Activation of the device

Note: Once the device has been activated, it cannot be stopped anymore.





To activate the device, press the SET and the READ buttons simultaneously for more than 3 seconds. The following calendar format will appear: **dd.mm.yyyy.**

Note: After approx. 60 seconds without pressing any button of the Fridge-tag the device goes back into sleep mode. Start from the beginning.

5 Setting the calendar format

Press **READ** to change the calendar format.



Option 1 Setting the calendar format to: dd.mm.yyyy Option 2 Setting the calendar format to: mm.dd.yyyy

Then press SET to save the calendar format.

Setting the date and time

The **READ** button is used to adjust the numbers. Each time you press the **READ** button, the number in the flashing digit will increase by 1.

The **SET** button is used to save the number. After pressing the **SET** button, the next digit will start flashing.



The 1st digit is flashing: Press **READ** until «I» appears as the first digit. Press SET to save the digit. Go on with the next digits in the same way until date and time is set.

Correct or change settings? See user manual in chapter «Learn More»

7 Activation completed



As soon as the last digit of the time setting is confirmed, the activation is completed. Now place the Fridge-tag. If you have a device with external sensor, connect the device with the external sensor. During max. 1 minute after activation no temperature is displayed on the

Connection error?

See user manual in chapter «Learn More»

Learn More

mation

User Manual Product infor-

8 Placing the Fridge-tag

The activated Fridge-tag must be placed immediately in its predetermined location. It is recommended and important to place the device in the centre

External sensor

sensor must be placed in its predetermined location. It is recommended and important to place the external sensor in the centre of the refrigerator for an optimal temperature observation and to avoid any incorrect measurements when starting the device.



Berlinger Website

Fridge-tag

Support

Video

Technical **Specification**

Scan the QR code

of the refrigerator for an optimal temperature observation.

Two hours before activating the device the external

Placing the Fridge-tag? See user manual in chapter «Learn More»






QUICK INFO - USER GUIDE

Fridge-tag 2L

1 Temperature status


Indication of an OK display

In measurement mode, when no alarm has been triggered, the following information is indicated:




Indication of an alarm display


In measurement mode, when an alarm has been triggered, the following information is indicated



Alarm display and confirmation options? See user manual in chapter «**Learn More**»

2 Reading the history

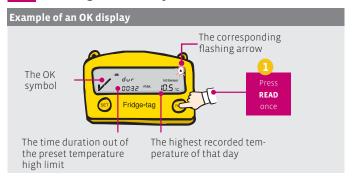

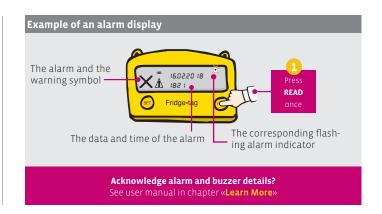

Alarm display: additional information



Press **READ** a second time for additional information.



Note: Continue repetitively pressing the **READ** button to read out the details of the past 30 days.



Press and hold **READ** for 3 seconds for the Alarm-Super-Jump Function

Note: Press and hold the **READ** button again for at least 3 seconds and the next alarm event will appear on the screen.

Acknowledge alarm? ser manual in chapter «Learn More

3 Download reports



Connect the device via USB with your PC/MAC.

Note: Disconnect the external sensor from the device first.

The Fridge-tag will now generate a PDF and an ASCII report. This process can take up to 2 minutes.

Download reports?

See user manual in chapter «Learn More»



& berlinger

Berlinger & Co. AG

Mitteldorfstrasse 2 9608 Ganterschwil Switzerland

lel. +41 71 982 88 11 info@berlinger.com www.berlinger.com