



Portable Air Cooled Air Conditioners

Office Pro 24

Cooling Capacity	Btu/hr. @ 95°	
	At 60% Relative Humidity	24,000
Dimensions	Width (Inches)	21
	Depth (Inches)	27
	Height (Inches)	49
	Weight (Pounds)	216
	Shipping Weight	253
Electrical Characteristics	Power Supply (Volts)	208-230 1phase
	Power Consumption (Kilowatts)	2.9
	Current Consumption (Amperes)	13.2
	Fuse Size (Amperes)	20
	NEMA Plug Configuration	6-20
	Min-max Voltage	198-250 Volt
	Power Cord Gauge	12AWG (3 Core)
Power Cord Length (Feet)	6	
Compressor Characteristics	Compressor Type	Hermetic Rotary
	Refrigerant	410A
	Operating Conditions: Min-max °F	65°-95°F, 50% RH
Fan Characteristics	<i>Evaporator:</i>	
	Fan Type	Centrifugal
	Air Flow (CFM) High/Low	630/545
	Max. External Static Pressure (Inches Of Water Gauge)	0.5
	<i>Condenser:</i>	
	Fan Type	Centrifugal
	Air Flow (CFM) High/Low	870/760
Max. External Static Pressure (Inches Of Water Gauge)	0.16	
Safety Devices	Compressor Overload Relay	Yes
	Fan Motor Protection	Yes
	Anti-freeze Thermostat	Yes
	Automatic Tank Shut-off	Yes
	Condensate Tank Capacity (Gallons)	5
	High-pressure Switch	Yes
	Compressor Short-cycle Protection	Yes
	Fan Mode Switch	Yes
	Automatic Restart	Yes
	Thermostat	Yes
Control Panel	Programmable	
Miscellaneous Features	Operating Cost	\$0.194
	Humidity Removed @ 60% RH	1.25
	Accommodates Condensate Pump	Yes
	Sound Level (Db) High/Low	63/61
	Max Evaporator Ducting Length*(Ft.)	50
	Max Condenser Ducting Length*(Ft.)	45

*subtract 10 Ft. For Every 90° Bend



Portable Air Cooled Air Conditioners

Office Pro 24

Power Supply 208-230 volts 60 hertz 1 phase 13.2 amperes

Width 21 inches


Depth 27 inches

Height 49 inches


Weight (net/shipping) lbs 216/253

All models are backed by a 12-month warranty with 36 months for the compressor.
All coils are treated with an acrylic resin coating for extended life and corrosion resistance.

TOP

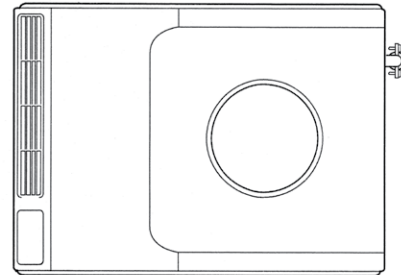

FRONT

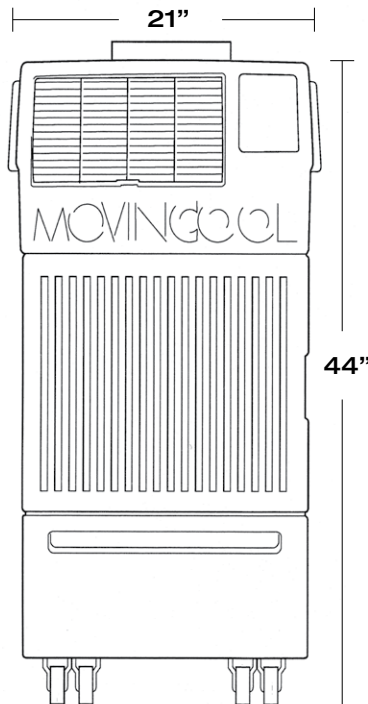

SIDE
27"

