Carrier

AIR PURIFIER AND SMART AIR PURIFIER

Quick Start Guide

ENERGY STAR

Air Purifier Models
RMAP-ST | RMAP-XL

Smart Air Purifier Models
RMAP-SST | RMAP-SXL

⚠️ **CAUTION**
- Be sure to unplug the unit before removing the filter packaging.
- Remove the plastic packaging from the filter before use.
- Keep plastic packaging away from children as it may cause suffocation.

How to Prepare/Change the Filter

1 Hold the top cover of the product with both hands and pull up. Remove any tape used to secure unit during transit.


**2** Grasp the filter cover hole on the rear and pull cover out and then up to remove and access filter.

Filter cover hole

3 Remove the filter from the product and then remove the plastic packaging from the filter.

▸ Failing to remove the packaging will result in abnormal sounds and the filter will not work properly; and it may cause a fire or other damage to the product.

Plastic packaging

**4** Slide the filter back into the unit with tabs on filter facing outward.

5 Replace filter cover.
▸ Insert the cover into the fixed groove at the bottom of the product.
▸ Slide the cover forward so that the cover fits into the top grooves.

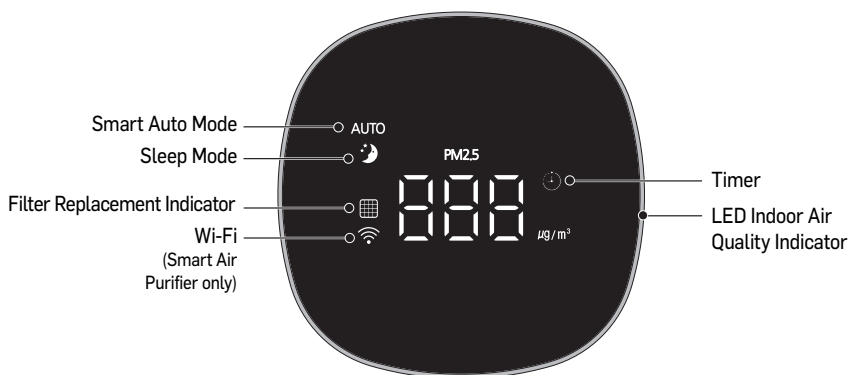

Fixed groove at bottom

Cover-positioning groove at top

6 Hold the top cover of the product with both hands and slide it back in place, making sure the logo appears in the front.
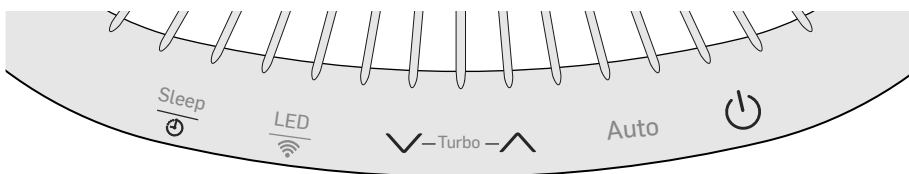
7 Place purifier in desired location and plug into wall outlet.

8 For filter replacement:
When the filter installation is complete, press the $\frac{Sleep}{\oplus}$ +"Auto" button on the control panel for five seconds or more to reset the filter indicator light.

▸ The red filter light will turn off when the product is reset.

Display

Smart Auto Mode — AUTO

Sleep Mode —

PM2.5

Filter Replacement Indicator —

Wi-Fi —
(Smart Air Purifier only)

$\mu g / m^3$

Timer

LED Indoor Air Quality Indicator

Control Panel

Sleep $\oplus$ LED $\widehat{\widehat{\cdot}}$ ∨—Turbo—∧   Auto   ⏻

Control Panel Descriptions

$\frac{Sleep}{\oplus}$	Sleep mode / Timer	∧	Increase the timer and fan speed setting value
$\frac{LED}{\widehat{\widehat{\cdot}}}$	LED ON/OFF & Wi-Fi® connection (LED off cycle lasts 6 hours)	Auto	Smart Auto mode
∨	Decrease the timer and fan speed setting value	⏻	Power ON/OFF

Normal Operation

> **Note** ☼ When the air purifier turns on, the sensor is initialized and the display shows ⌐_ _¬ during initialization.

1 Press the ⏻ button to turn on.
  ▸ The previously selected operation mode will be displayed.

2 Press the ∨ ∧ button on the control panel to select your desired fan speed.
  ▸ You can adjust the fan speed from level 1 (F1) to level 18 (F18).

  Note: The default home display on Wi-Fi® models will show a PM2.5 reading. Once the ∨ ∧ button is pushed, the display will switch to show designated fan speed.

PM2.5
17 μg/m³

> **Note** ☼ Refer to the User Manual and the Carrier Home app for complete set up instructions for the Smart Air Purifier models.

How to Install Casters (Optional)

1 Inside of the air purifier package, there is a small box containing four casters and eight screws.

2 Remove the four bottom bases from the air purifier with a screw driver.

3 Replace each base with a caster, utilizing two screws per caster.

4 Retain the removed bottom bases and screws for future use.

> **Note** ☼ If there is no caster box inside the product box, please contact customer service at 1-888-320-0909.

AHAM VERIFIDE®   ETL us Intertek   energy ENERGY STAR