

SMMSu / SHRMu VRF Indoor Unit MMU-UP0421HP-UL—4-Way-Cassette

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____
Tag _____



A210766

SMMSu / SHRMu VRF 4-Way Cassette Features

- R-410A refrigerant
- Eleven sizes from 7,500 to 54,000 Btu/h
- Optional fresh air intake
- Quiet operation (as low as 29 dBA)
- Standard condensate pump with 26 in. lift capacity
- Independent louver control (fixed or swing)
- Optional wired or wireless controls
- Auto or manually set three fan speeds
- Easy to remove cleanable filter
- Five-year parts limited warranty

INDOOR UNIT MODEL		MMU-UP0421HP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	42,000
Heating Rated Capacity	Btu/h	47,500
Fan Type (Qty)		Turbo (1)
Airflow (H / M / L)	CFM	1250 / 840 / 670
Sound Pressure (H / M / L)	dBA	48.5 / 40.5 / 37.5
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.112
Full Load Amps (FLA)	A	1.15
Minimum Circuit Amps (MCA)	A	1.44
Maximum Overcurrent Protection	A	15.0
MOTOR		
Motor Type		DC
Motor Watts	W	150

PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	5/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant		R-410A
External Finish		Zinc Hot Dipping Steel Plate
Unit Width	in.	33-1/8
Unit Height	in.	12-5/8
Unit Depth	in.	33-1/8
Unit Net Weight	lb	60
Panel Width	in.	37-3/8
Panel Height	in.	1-3/16
Panel Depth	in.	37-3/8
Panel Net Weight	lb	10
FILTER (Included)		
Type		Washable
Quantity		1
MERV rating		5
Dimensions	in.	21-3/8 x 21-7/8 x 3/4


ACCESSORIES (Optional)

- ☐ Wired Remote Controller (7-Day Programmable)
RBC-AMS54E-UL / RBC-AWSU52-UL
- ☐ Simple Wired Remote Control RBC-AS41UL
- ☐ Wireless Receiver Kit
RBC-AXU33UP-UL
- ☐ Wireless Controller Kit
RBC-AXU31UP-UL
- ☐ Remote Sensor TCB-TC41U-UL

- ☐ Grille Panel RBC-U32PGP-UL
- ☐ Spacer for Height Adjustment TCB-SP1602UUL
- ☐ Air Discharge Direction Kit TCB-BC1602UUL
- ☐ Fresh Air Chamber TCB-GFC1602UUL
- ☐ Fresh Air Inlet Box TCB-GB1602UUL
- ☐ Auxiliary Fresh Air Flange TCB-FF101URUL
- ☐ Occupancy Sensor TCB-SIR33UP-UL

DIMENSIONAL DRAWING

INDOOR UNIT 4-WAY CASSETTE MMU-UP0421HP-UL

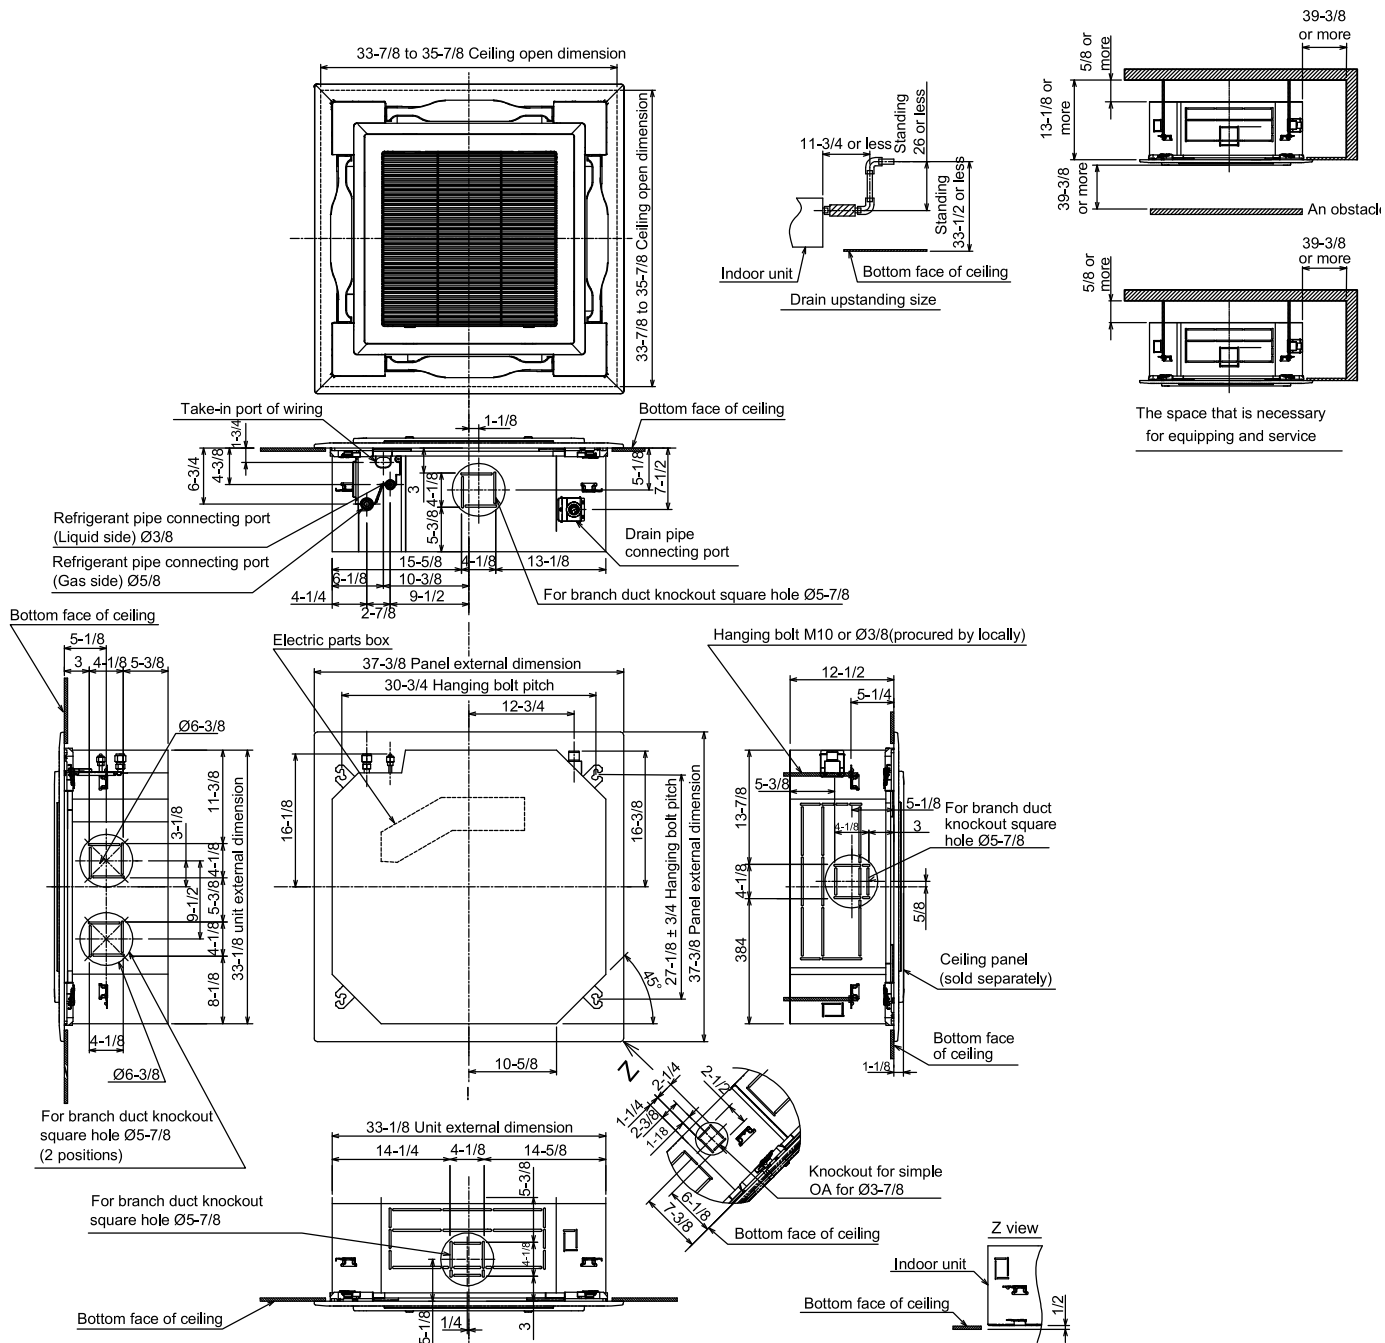

NOTE: All dimensions are shown in inches.

A210768

