

High Wall Heat Pump Ductless System

Indoor Model: 40MHHAQ30XA3

Submittal Data

Job Data:

Location:

Buyer: Buyer P.O. #:

Carrier #:

Unit Number:

Model Number:

Performance Data Certified By:

Date:



STANDARD FEATURES:

- Available in 208/230V (9-36K)
- Available in 115V (9K-12K)
- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Fully Modulating fan speeds
- Up-Down / Right-Left Louver control (fixed or swing)
- ECO Mode
- Heating Setback (46° F Heating Mode)
- Anti-corrosive fin coatings

CONTROLS:

- Wireless Remote Controller included with indoor unit

System	Size		30
	Indoor Model		40MHHAQ30XA3
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	0.625
Controls	Wireless Remote Controller (°F/°C Convertible)		Standard
	Wired Remote Controller (°F/°C Convertible)		Optional
Operating Range	Cooling Indoor DB Min -Max	°F(°C)	63~90 (17~32)
	Heating Indoor DB Min -Max	°F(°C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	3/8 (9.52)
	Pipe Connection Size - Suction	in (mm)	5/8 (16)

Indoor Coil	Face Area		Sq. Ft.	3.90
	No. Rows			3
	Fins per inch			20
	Circuits			7
Indoor	Unit Width	in (mm)		49.57 (1259)
	Unit Height	in (mm)		14.25 (362)
	Unit Depth	in (mm)		11.14 (283)
	Net Weight	lbs (kg)		42.99 (19.5)
	Number of Fan Speeds			4
	Airflow (lowest to highest)	CFM		380/536/702/741
	Sound Pressure (lowest to highest)	dB(A)		34/40/44/50
	Air throw Data	ft (m)		29.8 (9.1)
	Moisture removal	Pint/h (L/h)		7.9 (3.73)
	Field Drain Pipe Size	in (mm)		5/8 (16)


Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.
For Compatibility See Product Data

Accessories

KSACN0901AAA	Wired Remote Control 7 Day Programmable
KSACN0101AAA	Wired Remote Control with Timer Function
KSAIF0601AAA	Wi-Fi™ Kit High Wall Mid-Tier
KSAIC0301230	24V Interface Kit 230V

Construction View

Indoor Model: 40MHHAQ30XA3

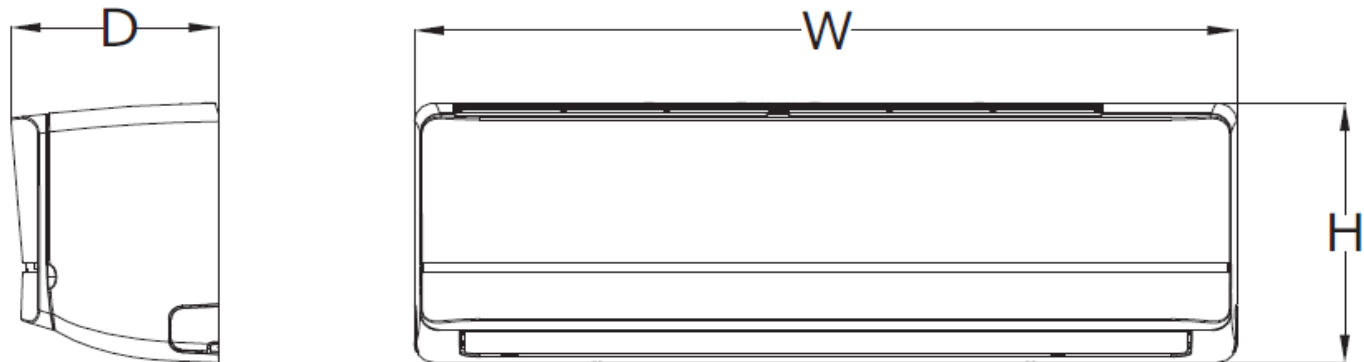

Unit Width	in (mm)	49.57 (1259)
Unit Height	in (mm)	14.25 (362)
Unit Depth	in (mm)	11.14 (283)
Net Weight	lbs (kg)	42.99 (19.5)

