

SMMSe / SHRMe VRF Indoor Unit MMC-AP0181H2UL—Underceiling

TOSHIBA
Carrier

Submittal Data

Job Data _____ Location _____
Buyer _____ Buyer PO # _____ Carrier # _____
Unit Number _____ Model Number _____
Performance Data Certified By _____ Date _____



SMMSe / SHRMe VRF Underceiling Features

- R-410A refrigerant
- Four sizes from 18,000 to 42,000 Btu/h
- Quiet operation, as low as 32.5 dBA
- Vertical airflow can be set to swing or fixed position
- Auto or manually set three fan speeds
- Easy to remove cleanable filter
- Five-year parts limited warranty

INDOOR UNIT MODEL		MMC-AP0181H2UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	18,000
Heating Rated Capacity	Btu/h	20,000
Fan Type (Qty)		Centrifugal (2)
Air Flow (L / M / H)	CFM	320 / 360 / 410
Sound Pressure (L / M / H)	dBA	32.5 / 35 / 38.5
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.038
Full Load Amps (FLA)	A	0.4
Minimum Circuit Amps (MCA)	A	0.5
Maximum Overcurrent Protection	A	15


MOTOR		
Motor Type	DC Inverter Driven	
Motor Watts	W	60
PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	1/2 (Flare)
Pipe Connection Size - Drain (OD)	in.	1
Pipe Connection Size - Drain (ID)	in.	13/16
Refrigerant	R-410A	
External Finish	Munsell 10Y9.3/0.4	
Unit Width	in.	35-3/4
Unit Height	in.	8-5/16
Unit Depth	in.	26-3/4
Net Weight	lb	46

ACCESSORIES

- ☐ Wired Remote Controller (7-Day Programmable) - RBC-AMS54E-UL
- ☐ Simple Wired Remote Control - RBC-AS41UL
- ☐ Stand Alone Receiver with Wireless Remote TCB-AX32UL
- ☐ Integral Receiver with Wireless Remote RBC-AX33CUL
- ☐ Remote Sensor TCB-TC41LUL
- ☐ Wired Remote Controller - RBC-AMT32UL
- ☐ Elbow Piping Kit TCB-KP12CUL
- ☐ Condensate Drain Pump Kit TCB-DP22CUL

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING INDOOR UNIT UNDERCEILING MMC-AP0181H2UL

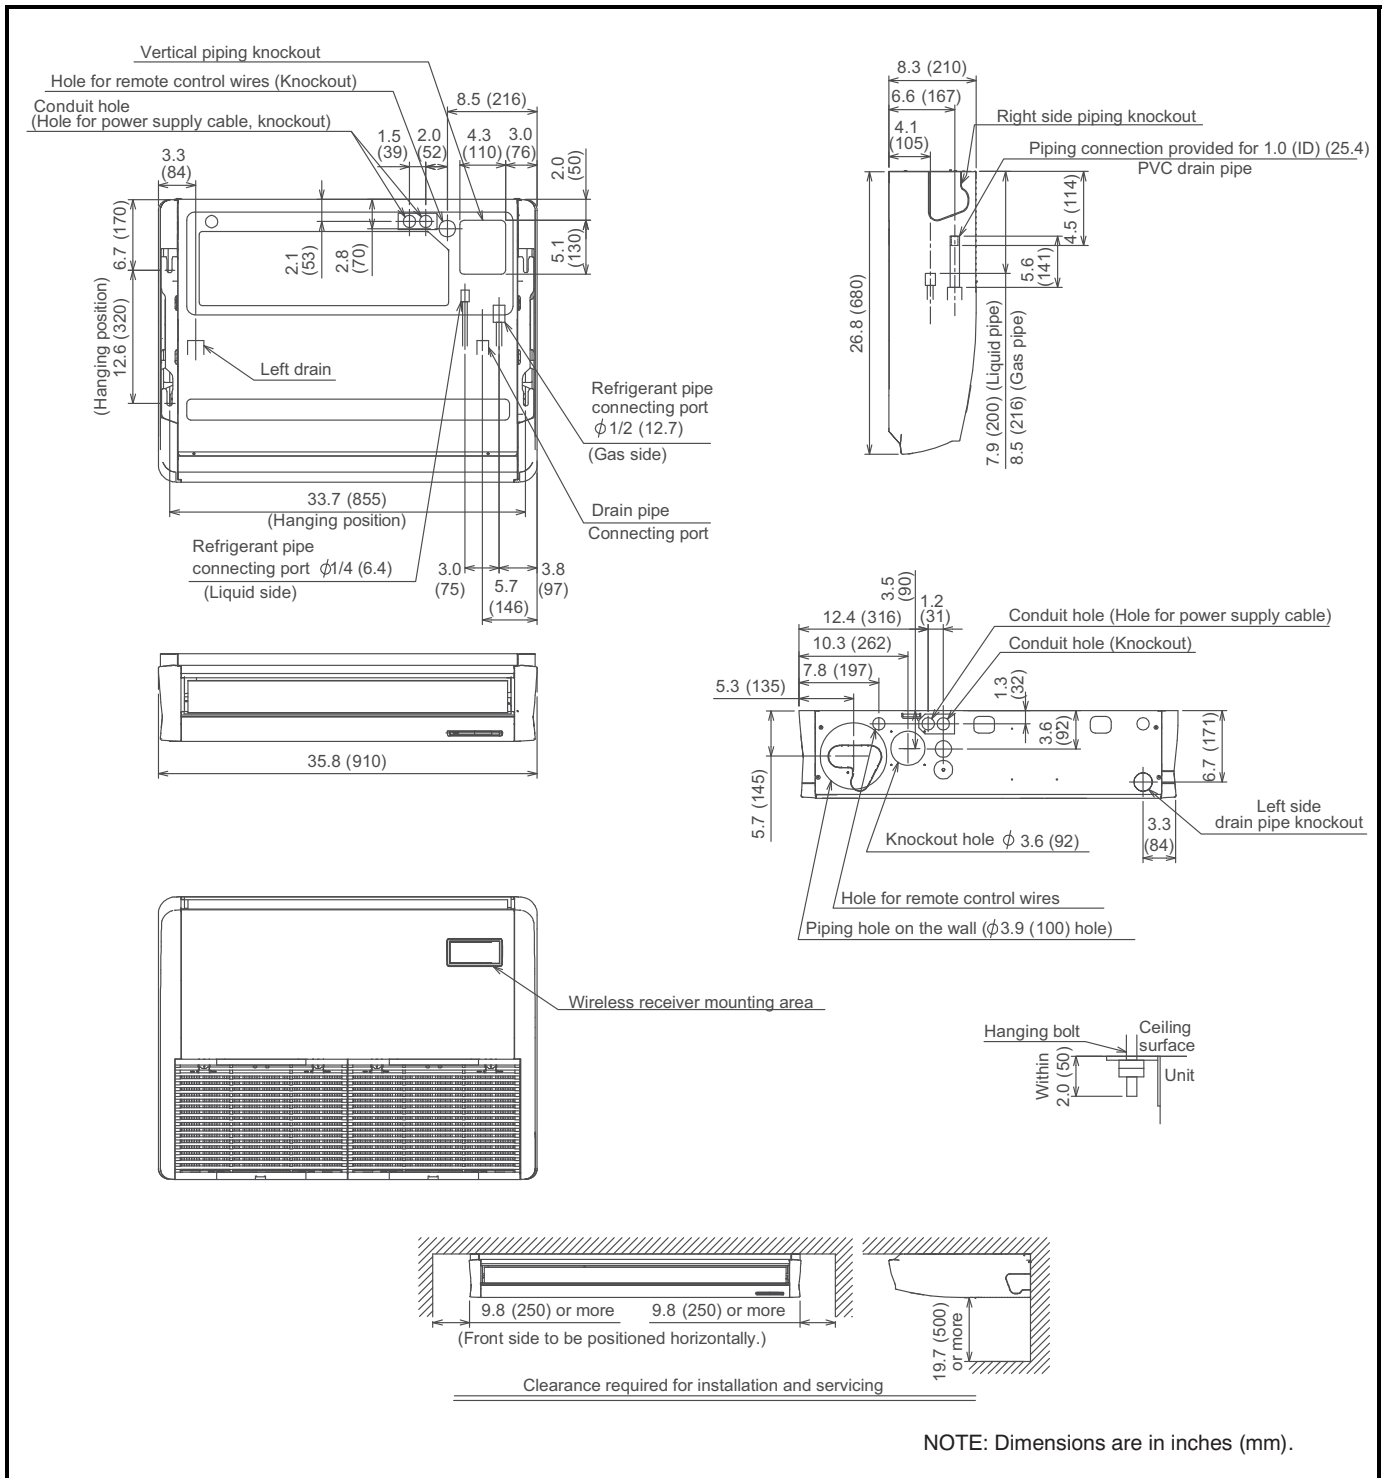

NOTE: Dimensions are in inches (mm).

