



## Portable Air Cooled Air Conditioners

# Office Pro 36

<b>Cooling Capacity</b>	Btu/hr. @ 95°	
	At 60% Relative Humidity	36,000
<b>Dimensions</b>	Width (Inches)	30
	Depth (Inches)	44
	Height (Inches)	52
	Weight (Pounds)	440
	Shipping Weight	483
<b>Electrical Characteristics</b>	Power Supply (Volts)	208-230 1phase
	Power Consumption (Kilowatts)	4.3
	Current Consumption (Amperes)	19.6
	Fuse Size (Amperes)	30
	NEMA Plug Configuration	6-30
	Min-max Voltage	198-250 Volt
	Power Cord Gauge	12AWG (3 Core)
	Power Cord Length (Feet)	6
<b>Compressor Characteristics</b>	Compressor Type	Hermetic Scroll
	Refrigerant	R-410A
	Operating Conditions: Min-max °F	65°-95°F, 50% RH
<b>Fan Characteristics</b>	<i>Evaporator:</i>	
	Fan Type	Centrifugal
	Air Flow (CFM) High/Low	990/825
	Max. External Static Pressure (Inches Of Water Gauge)	0.6
	<i>Condenser:</i>	
	Fan Type	Centrifugal
	Air Flow (CFM) High/Low	1490/1060
Max. External Static Pressure (Inches Of Water Gauge)	0.5	
<b>Safety Devices</b>	Compressor Overload Relay	Yes
	Fan Motor Protection	Yes
	Anti-freeze Thermostat	Yes
	Automatic Tank Shut-off	Yes
	Condensate Tank Capacity (Gallons)	2@2.5 gal
	High-pressure Switch	Yes
	Compressor Short-cycle Protection	Yes
	Fan Mode Switch	Yes
	Automatic Restart	Yes
	Thermostat	Yes
Control Panel	Programmable	
<b>Miscellaneous Features</b>	Operating Cost	\$0.35
	Humidity Removed @ 60% RH	2.17
	Accommodates Condensate Pump	Yes
	Sound Level (Db) High/Low	65/62
	Max Evaporator Ducting Length*(Ft.)	40
	Max Condenser Ducting Length*(Ft.)	60
	<i>*subtract 10 Ft. For Every 90° Bend</i>	



## Portable Air Cooled Air Conditioners

# Office Pro 36

**Power Supply** 208-230 volts 60 hertz 1 phase 19.6 amperes

**Width** 30 inches


**Depth** 44 inches

**Height** 52 inches

**Weight** (net/shipping) lbs 440/483


All models are backed by a 12-month warranty with 36 months for the compressor.  
All coils are treated with an acrylic resin coating for extended life and corrosion resistance.

TOP

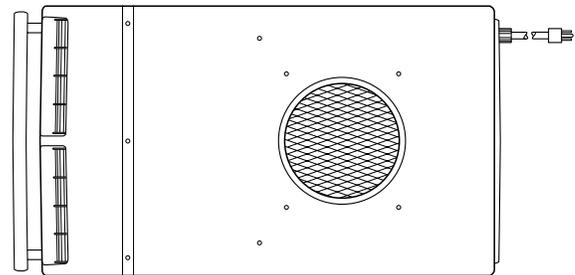


FRONT

30"

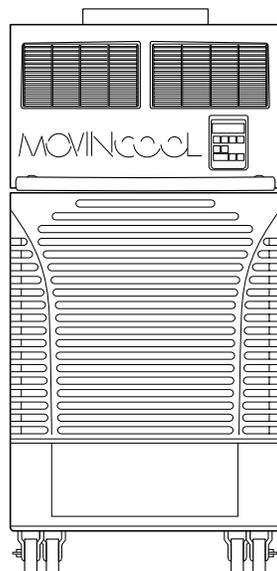

SIDE

44"

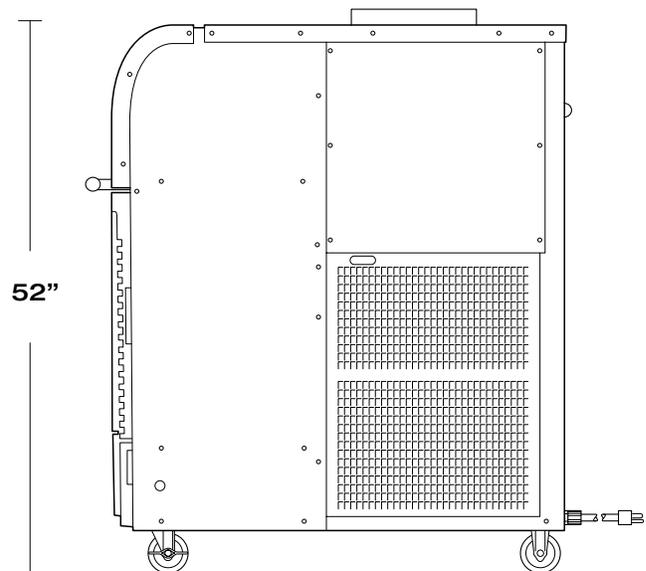

52"