

SMMSe / SHRMe VRF Indoor Unit MMU-AP0544HPUL—4-Way-Cassette

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____
Tag _____



A210766

SMMSe / SHRMe VRF 4-Way Cassette Features

- R-410A refrigerant
- Eleven sizes from 7,500 to 54,000 Btu/h
- Optional fresh air intake
- Quiet operation (as low as 29 dBA)
- Standard condensate pump with 26 in. lift capacity
- Independent louver control (fixed or swing)
- Optional wired or wireless controls
- Auto or manually set three fan speeds
- Easy to remove cleanable filter
- Five-year parts limited warranty


INDOOR UNIT MODEL		MMU-AP0544HPUL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	54,000
Heating Rated Capacity	Btu/h	60,000
Fan Type (Qty)		Turbo (1)
Airflow (H / M / L)	CFM	1250 / 890 / 720
Sound Pressure (H / M / L)	dBA	48.5 / 40.5 / 33
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.112
Full Load Amps (FLA)	A	1.15
Minimum Circuit Amps (MCA)	A	1.44
Maximum Overcurrent Protection (MOCP)	A	15.0
MOTOR		
Motor Type		DC
Motor Watts	W	150

PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	5/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant	R-410A	
External Finish	Zinc Hot Dipping Steel Plate	
Unit Width	in.	33-1/8
Unit Height	in.	12-5/8
Unit Depth	in.	33-1/8
Unit Net Weight	lb	60
Panel Width	in.	37-3/8
Panel Height	in.	1-3/16
Panel Depth	in.	37-3/8
Panel Net Weight	lb	10
FILTER (Included)		
Type	Washable	
Quantity	1	
MERV rating	5	
Dimensions	in.	21-3/8 x 21-7/8 x 3/4

ACCESSORIES (Optional)

- | | |
|--|--|
| <ul style="list-style-type: none"> <input type="checkbox"/> Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL <input type="checkbox"/> Simple Wired Remote Control RBC-AS41UL <input type="checkbox"/> Integral Receiver with Wireless Remote RBC-AX32U(W)-UL <input type="checkbox"/> Stand Alone Receiver with Wireless Remote TCB-AX32UL <input type="checkbox"/> Remote Sensor TCB-TC41LUL | <ul style="list-style-type: none"> <input type="checkbox"/> Wired Remote Controller RBC-AMT32UL <input type="checkbox"/> Grille Panel RBC-U32PGP-UL <input type="checkbox"/> Spacer for Height Adjustment TCB-SP1602UUL <input type="checkbox"/> Air Discharge Direction Kit TCB-BC1602UUL <input type="checkbox"/> Fresh Air Chamber TCB-GFC1602UUL <input type="checkbox"/> Fresh Air Inlet Box TCB-GB1602UUL <input type="checkbox"/> Auxiliary Fresh Air Flange TCB-FF101URUL |
|--|--|

DIMENSIONAL DRAWING INDOOR UNIT 4-WAY CASSETTE MMU-AP0544HPUL

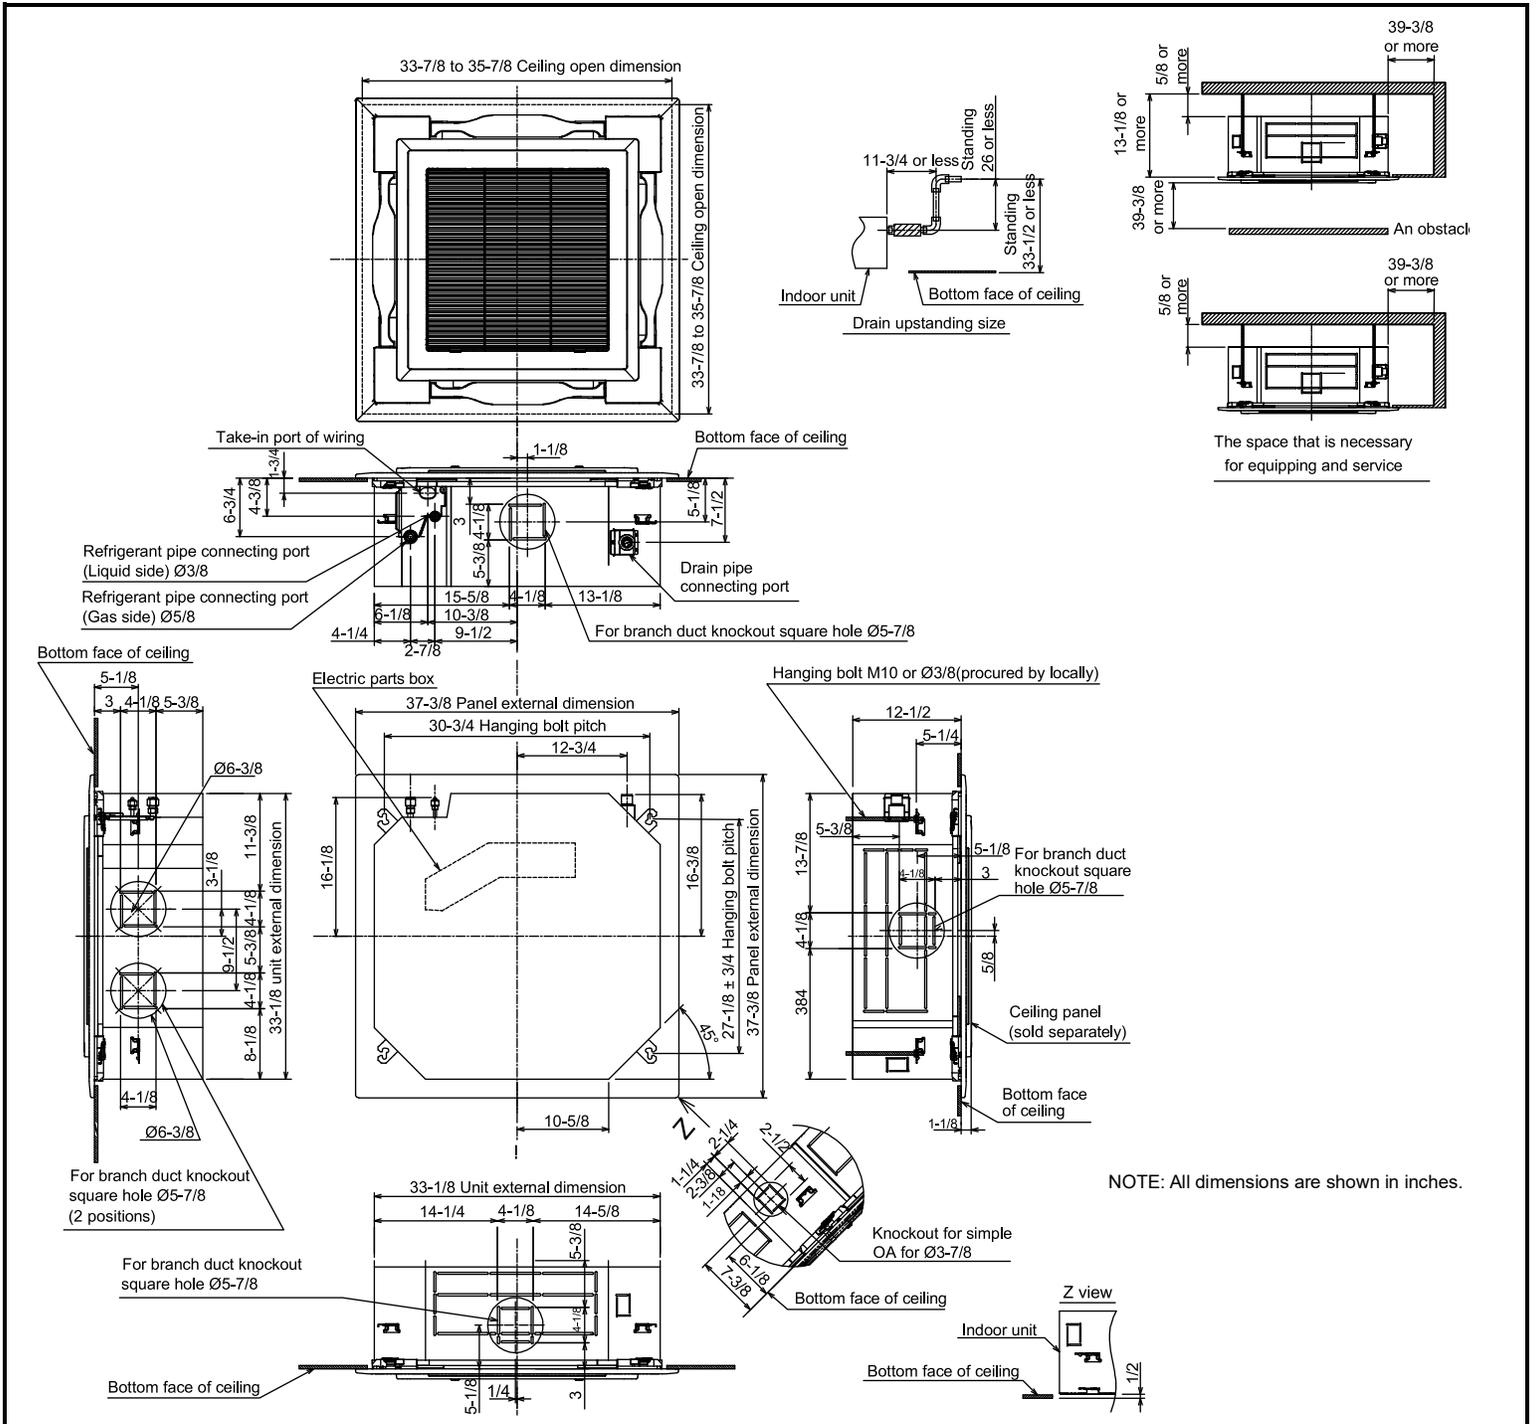

A210768

