

# SMMSe / SHRMe VRF Indoor Unit MMU-AP0364HPUL—4-Way-Cassette

# TOSHIBA Carrier

## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_



A210766

### SMMSe / SHRMe VRF 4-Way Cassette Features

- R-410A refrigerant
- Eleven sizes from 7,500 to 54,000 Btu/h
- Optional fresh air intake
- Quiet operation (as low as 29 dBA)
- Standard condensate pump with 26 in. lift capacity
- Independent louver control (fixed or swing)
- Optional wired or wireless controls
- Auto or manually set three fan speeds
- Easy to remove cleanable filter
- Five-year parts limited warranty

INDOOR UNIT MODEL		MMU-AP0364HPUL
<b>PERFORMANCE</b>		
Cooling Rated Capacity	Btu/h	36,000
Heating Rated Capacity	Btu/h	40,000
Fan Type (Qty)		Turbo (1)
Airflow (H / M / L)	CFM	1160 / 840 / 630
Sound Pressure (H / M / L)	dBA	46 / 40.5 / 36.5
<b>ELECTRICAL</b>		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.088
Full Load Amps (FLA)	A	1.15
Minimum Circuit Amps (MCA)	A	1.44
Maximum Overcurrent Protection (MOCP)	A	15.0
<b>MOTOR</b>		
Motor Type		DC
Motor Watts	W	150


<b>PHYSICAL DATA</b>		
Pipe Connection Size - Liquid (High Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	5/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant		R-410A
External Finish		Zinc Hot Dipping Steel Plate
Unit Width	in.	33-1/8
Unit Height	in.	12-5/8
Unit Depth	in.	33-1/8
Unit Net Weight	lb	60
Panel Width	in.	37-3/8
Panel Height	in.	1-3/16
Panel Depth	in.	37-3/8
Panel Net Weight	lb	10
<b>FILTER (Included)</b>		
Type		Washable
Quantity		1
MERV rating		5
Dimensions	in.	21-3/8 x 21-7/8 x 3/4

### ACCESSORIES (Optional)

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li><input type="checkbox"/> Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL</li> <li><input type="checkbox"/> Simple Wired Remote Control RBC-AS41UL</li> <li><input type="checkbox"/> Integral Receiver with Wireless Remote RBC-AX32U(W)-UL</li> <li><input type="checkbox"/> Stand Alone Receiver with Wireless Remote TCB-AX32UL</li> <li><input type="checkbox"/> Remote Sensor TCB-TC41LUL</li> </ul> | <ul style="list-style-type: none"> <li><input type="checkbox"/> Wired Remote Controller RBC-AMT32UL</li> <li><input type="checkbox"/> Grille Panel RBC-U32PGP-UL</li> <li><input type="checkbox"/> Spacer for Height Adjustment TCB-SP1602UUL</li> <li><input type="checkbox"/> Air Discharge Direction Kit TCB-BC1602UUL</li> <li><input type="checkbox"/> Fresh Air Chamber TCB-GFC1602UUL</li> <li><input type="checkbox"/> Fresh Air Inlet Box TCB-GB1602UUL</li> <li><input type="checkbox"/> Auxiliary Fresh Air Flange TCB-FF101URUL</li> </ul> |
|--|--|

# DIMENSIONAL DRAWING

## INDOOR UNIT 4-WAY CASSETTE MMU-AP0364HPUL

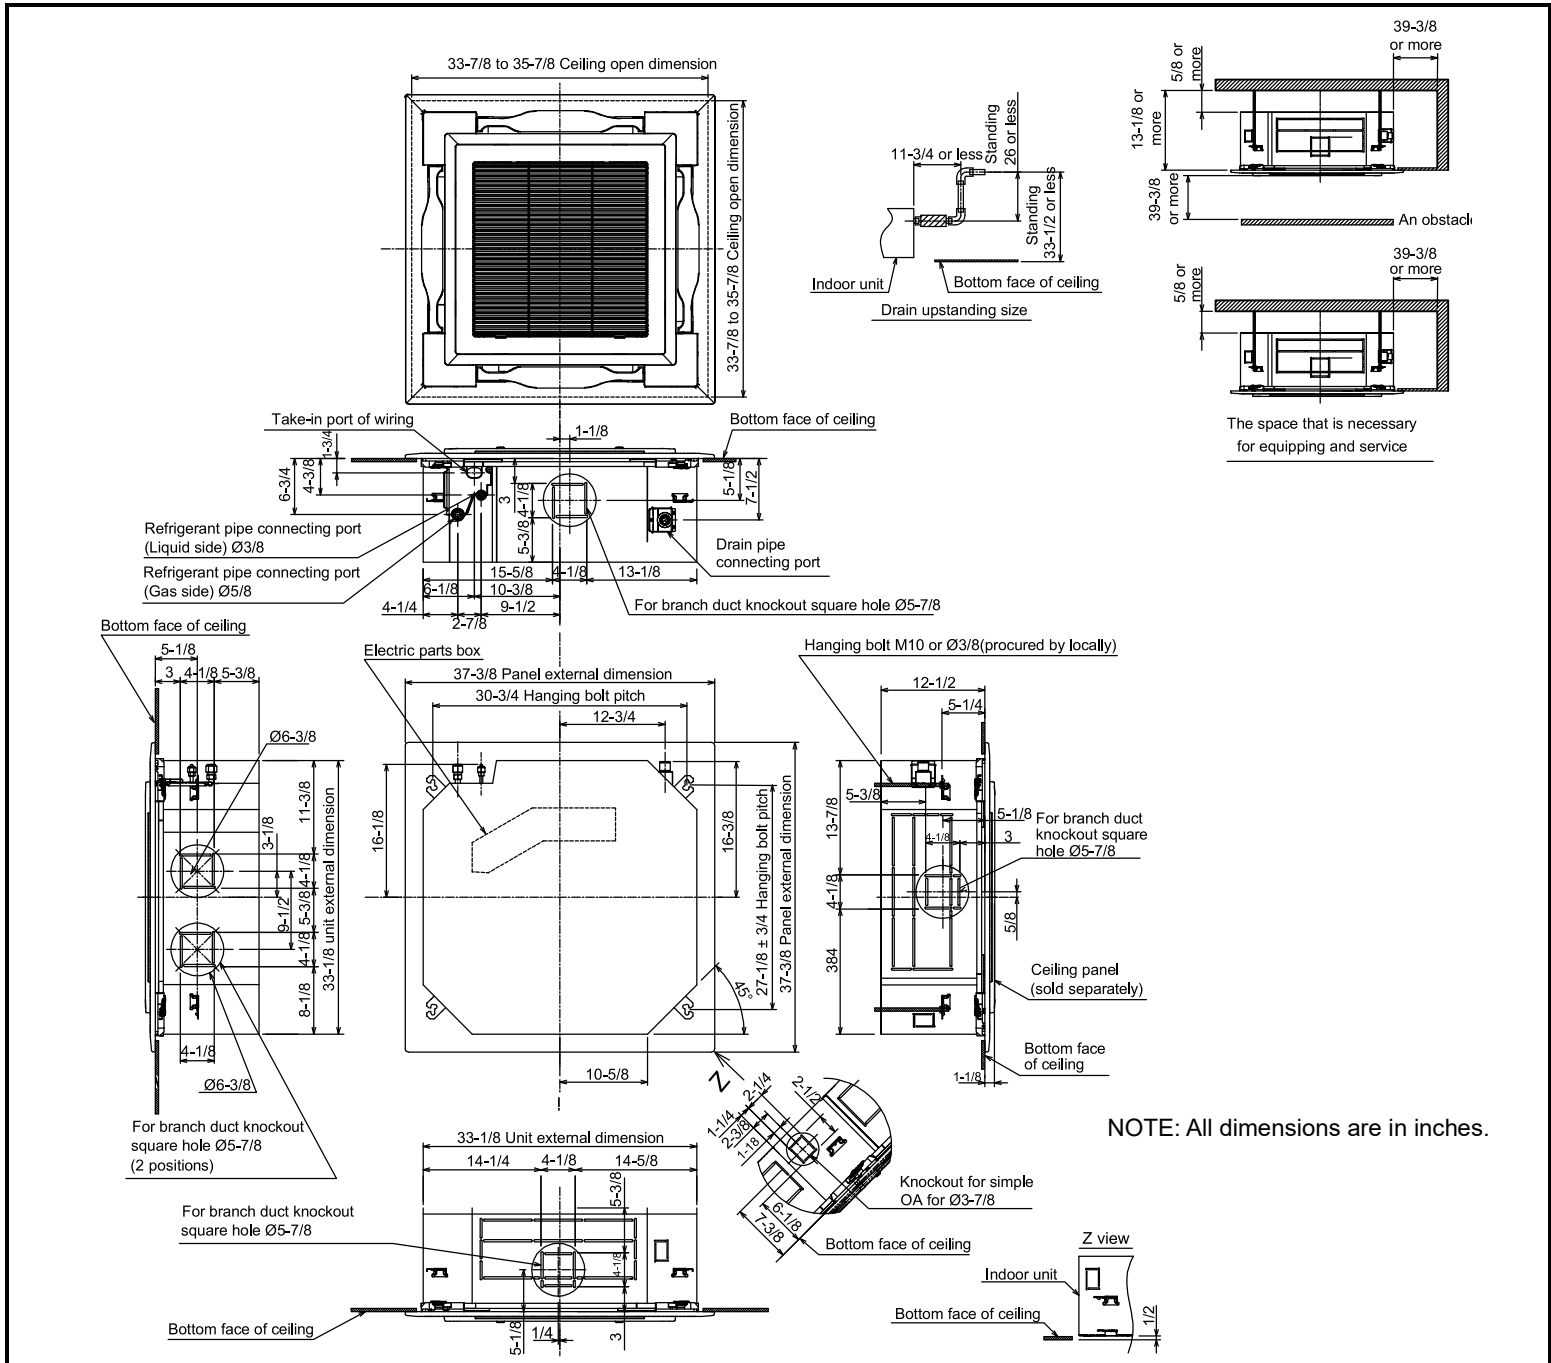

A210768

