


VRF Outdoor Unit MMY-UP3601FT9P-UL - Heat Recovery

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____

Tag _____

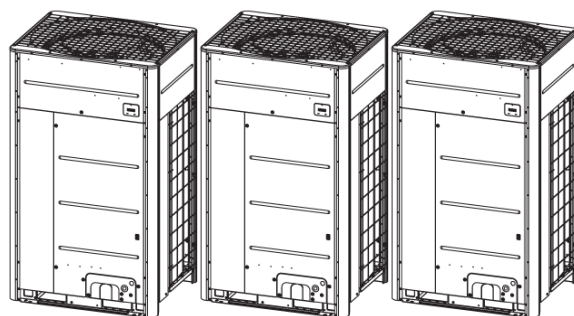

A210612

Heat Recovery Features

- Modules and pairings available from 6 to 42 tons
- Modules have inverter-driven rotary compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3937 ft actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil

- Operating temperature range
Cooling (db): -10° to 125°F (-15° to 52°C)
Heating (wb): -22° to 60°F (-25° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Combination Model		MMY-UP3601FT9P-UL
Header Unit Model		MUP1681FT9P-UL
Follower Unit Model		MUP0961FT9P-UL
Follower Unit Model		MUP0961FT9P-UL
PERFORMANCE		
Nominal Cooling Capacity	Btu/h	360,000
Nominal Heating Capacity	Btu/h	405,000
Maximum Number of Indoor Units		64
SIMULTANEOUS COOLING AND HEATING EFFICIENCY†		
SCHE, Ducted FCUs		25.0
SCHE, Ductless FCUs		25.7
COOLING EFFICIENCY†		
EER/IEER, Ducted FCUs	Btu/Wh	10.3/19.6
Power Consumption, Ducted FCUs	kW	30.17
EER/IEER, Ductless FCUs	Btu/Wh	10.6/20.5
Power Consumption, Ductless FCUs	kW	31.44
HEATING EFFICIENCY†		
COP at 47°F, Ducted FCUs		3.24
Power Consumption, Ducted FCUs	kW	31.88
COP at 47°F, Ductless FCUs		3.54
Power Consumption, Ductless FCUs	kW	31.14
Fan Type (Qty)		Propeller (3)
Airflow, Standard Range	CFM	8476 + (6357 x 2)
Sound Pressure	dBA	66.5
External Static Pressure*	in. wg	0.321

LEGEND

db	—	Dry Bulb
COP	—	Coefficient of Performance
EER	—	Energy Efficiency Ratio
FCU	—	Fan Coil Unit
IEER	—	Integrated Energy Efficiency Ratio
wb	—	Wet Bulb
SCHE	—	Simultaneous Cooling and Heating Efficiency

ELECTRICAL

Power Supply	V/Ph/Hz	208-230/3/60
Minimum Circuit Amps (MCA)	A	57.4 + (36.6 x 2)
Maximum Overcurrent Protection (MOCP)	A	80 + (45 x 2)

COMPRESSORS

Type (Number)		Hermetic Triple Rotary (1) + Hermetic Twin Rotary (2)
---------------	--	---

FAN MOTOR

Motor Output	kW	(0.48 x 2) + (0.66 x 2)
--------------	----	-------------------------

PHYSICAL DATA

Pipe Connection Size - Liquid (High Pressure)	in.	5/8 + (1/2 x 2) (Brazed)
Pipe Connection Size - Gas (Low Pressure)	in.	1-1/8 + (7/8 x 2) (Brazed)
Discharge - Gas (High/Low Pressure)		7/8 + (3/4 x 2) (Brazed)
Refrigerant		R-410A
Factory Charge††	lb	19.8 + (13.2 x 2)
Unit Width	in.	51-1/2 + (39-1/2 x 2)
Unit Height	in.	66-1/2 x 3
Unit Depth	in.	31-1/4 x 3
Net Weight	lb	783 + (532 x 2)

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db
Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb


*Requires setting by menu functions.

††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

DIMENSIONAL DRAWING

OUTDOOR UNIT MMY-UP3601FT9P-UL

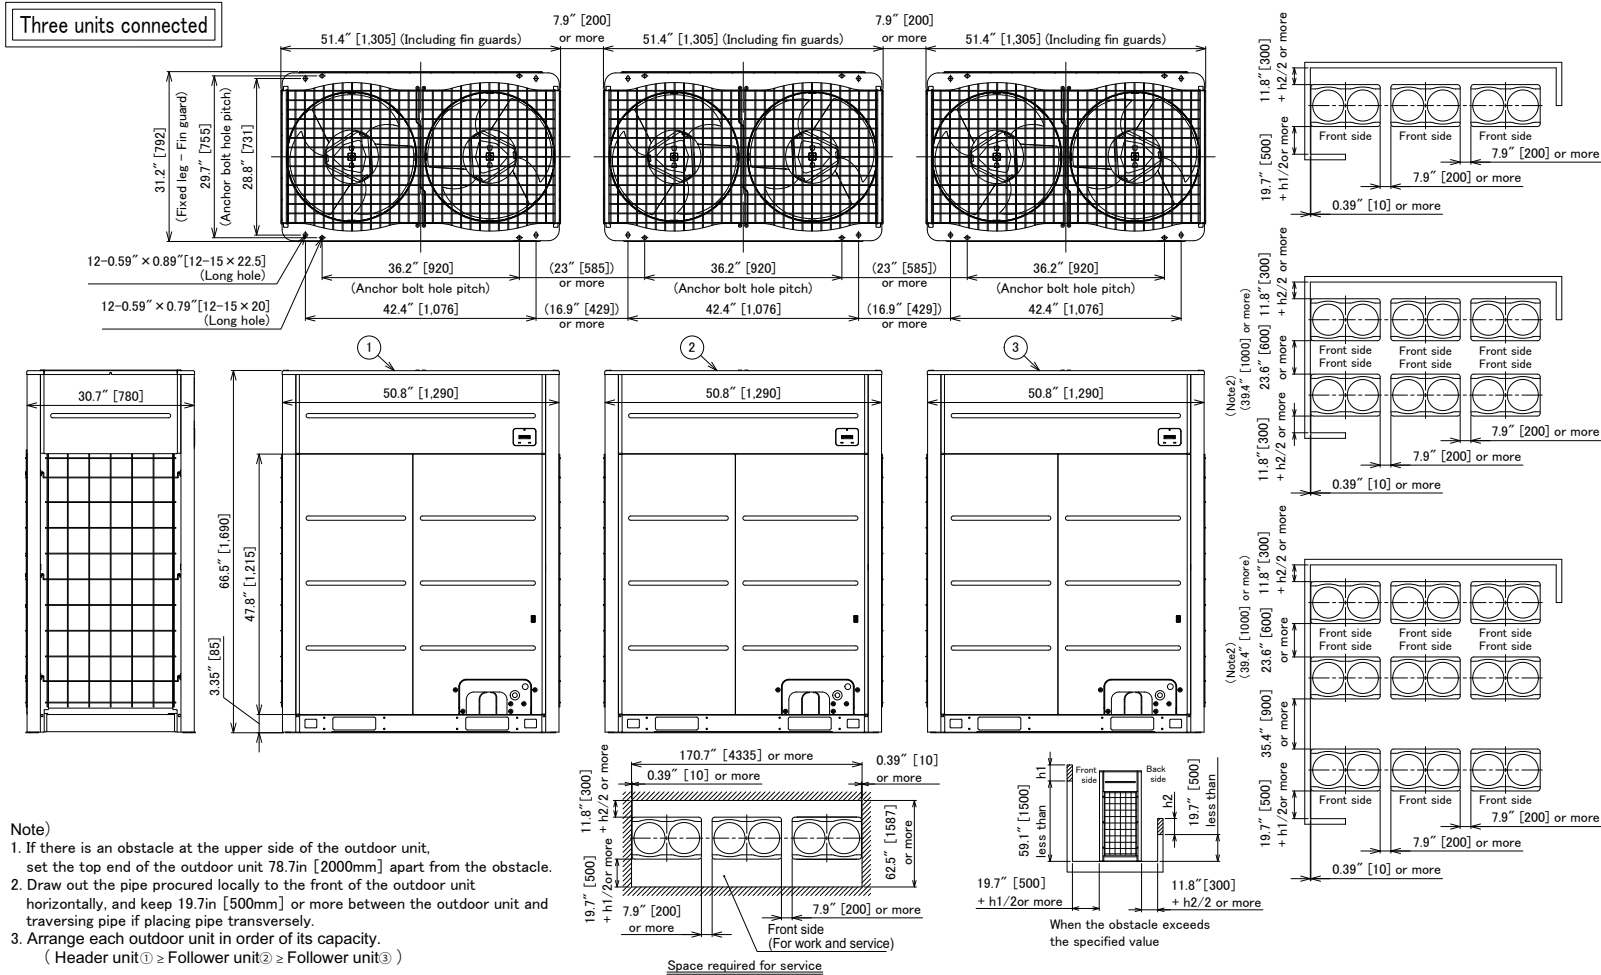

Model name	Outdoor unit		
	① Header unit	② Follower unit	③ Follower unit
MMY-UP360H1FT9PUL	MMY-MUP1681FT9PUL	MMY-MUP0961FT9PUL	MMY-MUP0961FT9PUL

(Unit : in [mm])

