SMMSe / SHRMe VRF Indoor Unit MMU-AP0094HPUL—4-Way-Cassette



Submittal Data

Job Name _.	Location	
T:		



SMMSe / SHRMe VRF 4-Way Cassette Features

- R-410A refrigerant
- Eleven sizes from 7,500 to 54,000 Btu/h
- · Optional fresh air intake
- · Quiet operation (as low as 29 dBA)
- · Standard condensate pump with 26 in. lift capacity
- · Independent louver control (fixed or swing)
- · Optional wired or wireless controls
- · Auto or manually set three fan speeds
- · Easy to remove cleanable filter
- Five-year parts limited warranty

INDOOR UNIT MODEL	MMU-AP0094HPUL					
PERFORMANCE						
Cooling Rated Capacity	Btu/h	9,500				
Heating Rated Capacity	Btu/h	10,500				
Fan Type (Qty)	Turbo (1)					
Airflow (H / M / L)	CFM	470 / 430 / 400				
Sound Pressure (H / M / L)	dBA	32.5 / 30.5 / 29				
ELECTRICAL						
Power Supply	V/Ph/Hz	208-230/1/60				
Power Consumption (Input)	kW	0.021				
Full Load Amps (FLA)	Α	0.63				
Minimum Circuit Amps (MCA)	Α	0.79				
Maximum Overcurrent Protection (MOCP)	А	15.0				
MOTOR						
Motor Type	DC					
Motor Watts	W	60				

PHYSICAL DATA						
Pipe Connection Size - Liquid	in.	1/4 (Flare)				
(High Pressure)						
Pipe Connection Size - Gas (Low	in.	3/8 (Flare)				
Pressure)						
Pipe Connection Size - Drain (OD)	in.	1-1/4				
Pipe Connection Size - Drain (ID)	in.	1				
Refrigerant		R-410A				
External Finish	Zinc Ho	t Dipped Steel Plate				
Unit Width	in.	33-1/8				
Unit Height	in.	10-1/8				
Unit Depth	in.	33-1/8				
Unit Net Weight	lb	45				
Panel Width	in.	37-3/8				
Panel Height	in.	1-3/16				
Panel Depth	in.	37-3/8				
Panel Net Weight	lb	10				
FILTER (Included)						
Туре	Washable					
Quantity		1				
MERV rating		5				
Dimensions	in.	21-3/8 x 21-7/8 x 3/4				

- ☐ Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL
- ☐ Simple Wired Remote Control RBC-AS41UL
- ☐ Integral Receiver with Wireless Remote RBC-AX32U(W)-UL
- ☐ Stand Alone Receiver with Wireless Remote TCB-AX32UL
- ☐ Remote Sensor TCB-TC41LUL

	Wired	Remote	Controller	RBC-A	MT32UL
--	-------	--------	------------	-------	--------

☐ Grille Panel RBC-U32PGP-UL

- ☐ Spacer for Height Adjustment TCB-SP1602UUL
- ☐ Air Discharge Direction Kit TCB-BC1602UUL
- ☐ Fresh Air Chamber TCB-GFC1602UUL
- ☐ Fresh Air Inlet Box TCB-GB1602UUL
- ☐ Auxiliary Fresh Air Flange TCB-FF101URUL

© 2021 Carrier. All rights reserved.


Edition Date: 12/21
Printed in U.S.A.

Form No: MMU-AP0094HPUL 01

A Carrier Company

Replaces: New

DIMENSIONAL DRAWING INDOOR UNIT 4-WAY CASSETTE MMU-AP0094HPUL

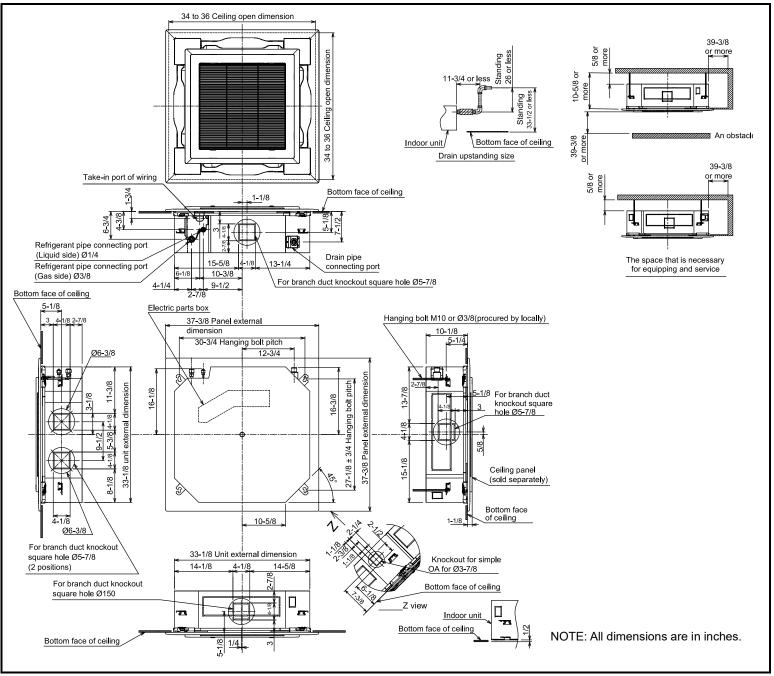

A210767

