

# SMMSe / SHRMe VRF Indoor Unit MMU-AP0244HPUL—4-Way-Cassette

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_



A210766

### SMMSe / SHRMe VRF 4-Way Cassette Features

- R-410A refrigerant
- Eleven sizes from 7,500 to 54,000 Btu/h
- Optional fresh air intake
- Quiet operation (as low as 29 dBA)
- Standard condensate pump with 26 in. lift capacity
- Independent louver control (fixed or swing)
- Optional wired or wireless controls
- Auto or manually set three fan speeds
- Easy to remove cleanable filter
- Five-year parts limited warranty

INDOOR UNIT MODEL		MMU-AP0244HPUL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	24,000
Heating Rated Capacity	Btu/h	27,000
Fan Type (Qty)		Turbo (1)
Airflow (H / M / L)	CFM	670 / 540 / 490
Sound Pressure (H / M / L)	dBA	38 / 33 / 31
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.036
Full Load Amps (FLA)	A	0.87
Minimum Circuit Amps (MCA)	A	1.09
Maximum Overcurrent Protection (MOCP)	A	15.0
MOTOR		
Motor Type		DC
Motor Watts	W	60


PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	5/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant	R-410A	
External Finish	Zinc Hot Dipped Steel Plate	
Unit Width	in.	33-1/8
Unit Height	in.	10-1/8
Unit Depth	in.	33-1/8
Unit Net Weight	lb	51
Panel Width	in.	37-3/8
Panel Height	in.	1-3/16
Panel Depth	in.	37-3/8
Panel Net Weight	lb	10
FILTER (Included)		
Type	Washable	
Quantity	1	
MERV rating	5	
Dimensions	in.	21-3/8 x 21-7/8 x 3/4

### ACCESSORIES (Optional)

- Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL
- Simple Wired Remote Control RBC-AS41UL
- Integral Receiver with Wireless Remote RBC-AX32U(W)-UL
- Stand Alone Receiver with Wireless Remote TCB-AX32UL
- Remote Sensor TCB-TC41LUL

- Wired Remote Controller RBC-AMT32UL
- Grille Panel RBC-U32PGP-UL
- Spacer for Height Adjustment TCB-SP1602UUL
- Air Discharge Direction Kit TCB-BC1602UUL
- Fresh Air Chamber TCB-GFC1602UUL
- Fresh Air Inlet Box TCB-GB1602UUL
- Auxiliary Fresh Air Flange TCB-FF101URUL

# DIMENSIONAL DRAWING INDOOR UNIT 4-WAY CASSETTE MMU-AP0244HPUL

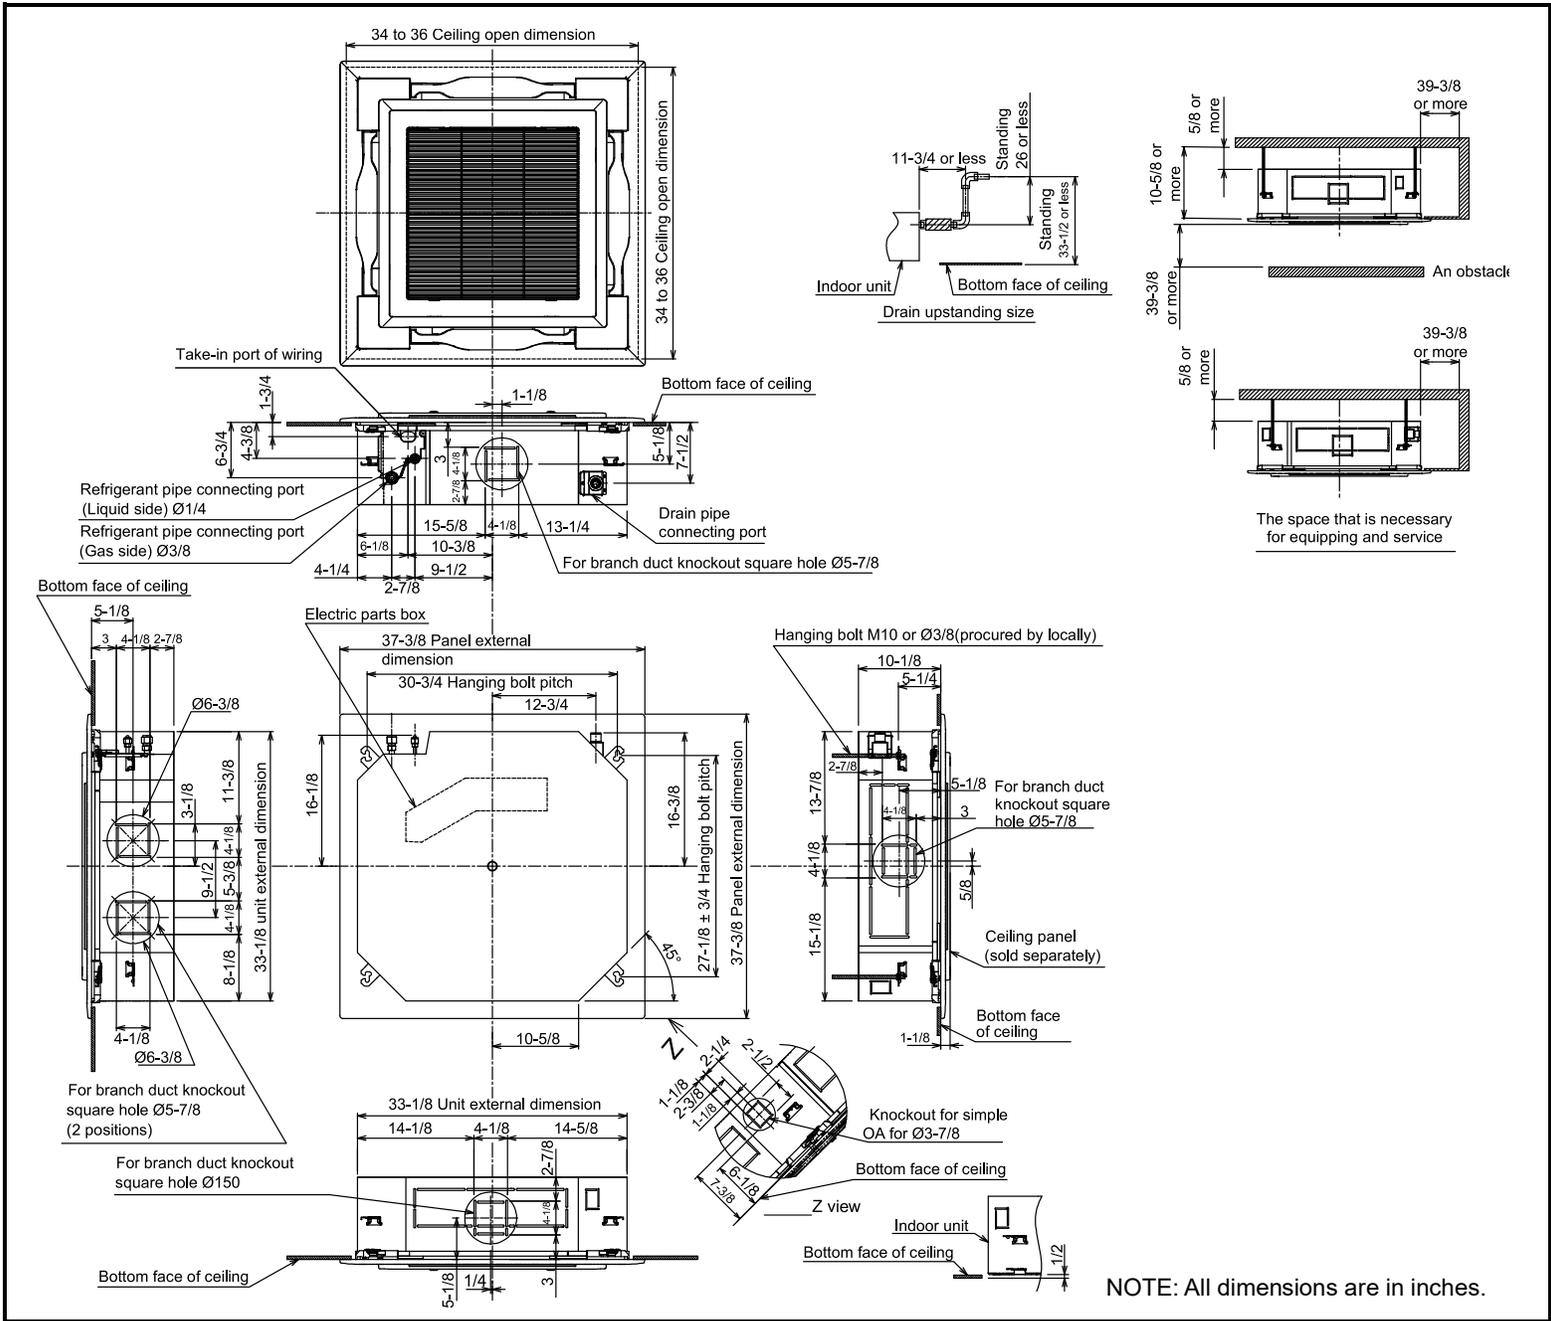

A210767

