


## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
 Tag \_\_\_\_\_

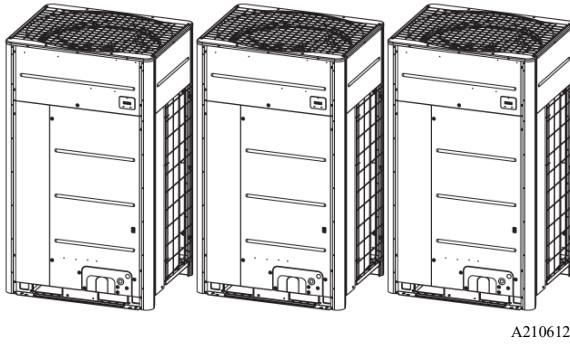

### Heat Recovery Features

- Modules and pairings available from 6 to 42 tons
- Modules have inverter-driven rotary compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3937 ft actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Operating temperature range  
 Cooling (db): -10° to 125°F  
 (-15° to 52°C)  
 Heating (wb): -22° to 60°F  
 (-25° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Combination Model	MMY-UP5041FT6P-UL	
Header Unit Model	MUP1681FT6P-UL	
Follower Unit Model	MUP1681FT6P-UL	
Follower Unit Model	MUP1681FT6P-UL	
<b>PERFORMANCE</b>		
Nominal Cooling Capacity	Btu/h	504,000
Nominal Heating Capacity	Btu/h	567,000
Maximum Number of Indoor Units		75
<b>SIMULTANEOUS COOLING AND HEATING EFFICIENCY†</b>		
SCHE, Ducted FCUs		24.0
SCHE, Ductless FCUs		24.9
<b>COOLING EFFICIENCY†</b>		
EER/IEER, Ducted FCUs	Btu/Wh	9.4/18.1
Power Consumption, Ducted FCUs	kW	47.09
EER/IEER, Ductless FCUs	Btu/Wh	9.4/19.6
Power Consumption, Ductless FCUs	kW	49.71
<b>HEATING EFFICIENCY†</b>		
COP at 47°F, Ducted FCUs		3.22
Power Consumption, Ducted FCUs	kW	45.18
COP at 47°F, Ductless FCUs		3.27
Power Consumption, Ductless FCUs	kW	47.04
Fan Type (Qty)		Propeller (6)
Airflow, Standard Range	CFM	8476 x 3
Sound Pressure	dBA	67.8
External Static Pressure*	in. wg	0.321
<b>LEGEND</b>		
db	— Dry Bulb	
COP	— Coefficient of Performance	
EER	— Energy Efficiency Ratio	
FCU	— Fan Coil Unit	
IEER	— Integrated Energy Efficiency Ratio	
wb	— Wet Bulb	
SCHE	— Simultaneous Cooling and Heating Efficiency	

### ELECTRICAL

Power Supply	V/Ph/Hz	460/3/60
Minimum Circuit Amps (MCA)	A	27.4 x 3
Maximum Overcurrent Protection (MOCP)	A	40 x 3

### COMPRESSORS

Type (Number)		Hermetic Triple Rotary (3)
---------------	--	----------------------------

### FAN MOTOR

Motor Output	kW	0.48 x 6
--------------	----	----------

### PHYSICAL DATA

Pipe Connection Size - Liquid (High Pressure)	in.	5/8 x 3 (Brazed)
Pipe Connection Size - Gas (Low Pressure)	in.	1-1/8 x 3 (Brazed)
Discharge - Gas (High/Low Pressure)		7/8 x 3 (Brazed)
Refrigerant		R-410A
Factory Charge††	lb	19.8 x 3
Unit Width	in.	51-1/2 x 3
Unit Height	in.	66-1/2 x 3
Unit Depth	in.	31-1/4 x 3
Net Weight	lb	776 x 3

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db  
 Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

\*Requires setting by menu functions.

††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

# DIMENSIONAL DRAWING

## OUTDOOR UNIT MMY-UP5041FT6P-UL

