

# VRF Indoor Unit 40VMC012---3 — Compact 4-Way Cassette



## Submittal Data

Job Data \_\_\_\_\_ Location \_\_\_\_\_  
 Buyer \_\_\_\_\_ Buyer PO # \_\_\_\_\_ Carrier # \_\_\_\_\_  
 Unit Number \_\_\_\_\_ Model Number \_\_\_\_\_  
 Performance Data Certified By \_\_\_\_\_ Date \_\_\_\_\_



### STANDARD FEATURES

- Delivers air in all four directions
- Three Fan Speeds – High, Medium and Low
- Built-in Condensate Lift Mechanism
- Built-in EXV (Electronic Expansion Valve) for Installation Ease



|                                            |         |                    |
|--------------------------------------------|---------|--------------------|
| Indoor Unit Model                          |         | 40VMC012---3       |
| PERFORMANCE                                |         |                    |
| Cooling Rated Capacity                     | Btu/h   | 12,000             |
| Heating Rated Capacity                     | Btu/h   | 13,000             |
| Airflow (H / M / L)                        | CFM     | 359 / 306 / 253    |
| Sound Pressure (H / M / L)                 | dBA     | 45.5 / 42.3 / 38.1 |
| ELECTRICAL                                 |         |                    |
| Power Supply                               | V/Ph/Hz | 208-230/1/60       |
| Indoor Fan Motor Power Consumption (Input) | W       | 24                 |
| Minimum Circuit Amps                       | A       | 0.53               |
| Maximum Overcurrent Protection             | A       | 15                 |
| Motor Type                                 |         | DC                 |

|                                |      |          |
|--------------------------------|------|----------|
| PHYSICAL DATA                  |      |          |
| Pipe Connection Size - Liquid  | in.  | 1/4 (OD) |
| Pipe Connection Size - Suction | in.  | 1/2 (OD) |
| Pipe Connection Size - Drain   | in.  | 1 (OD)   |
| Refrigerant                    |      | R-410A   |
| Unit Width                     | in.  | 24-13/16 |
| Unit Height                    | in.  | 10-1/4   |
| Unit Depth                     | in.  | 22-7/16  |
| Unit Net Weight                | lbs. | 43       |
| Panel Width                    | in.  | 25-1/2   |
| Panel Height                   | in.  | 2        |
| Panel Depth                    | in.  | 25-1/2   |
| Panel Net                      | lbs. | 5.5      |

### ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Centralized Controller 40VM900004
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

# DIMENSIONAL DRAWING INDOOR UNIT COMPACT 4-WAY CASSETTE 40VMC012---3

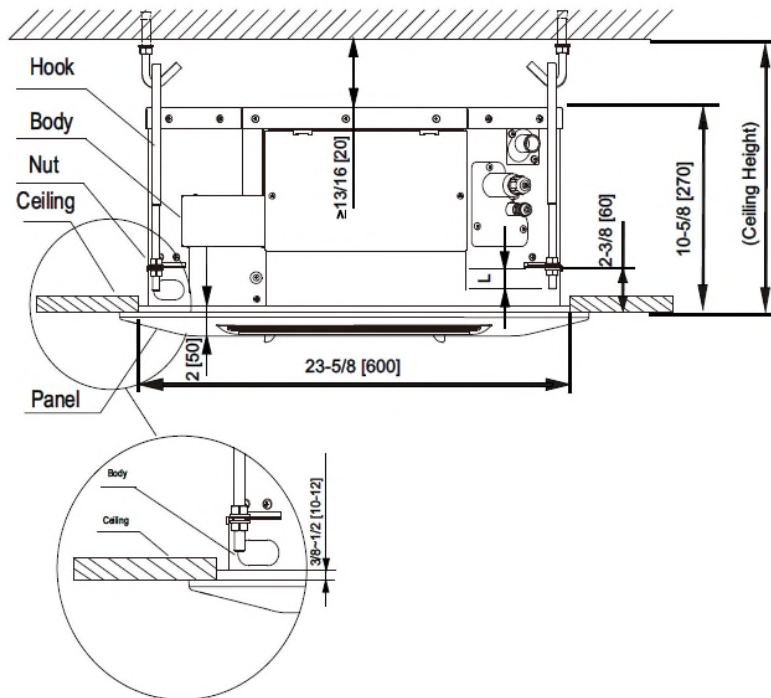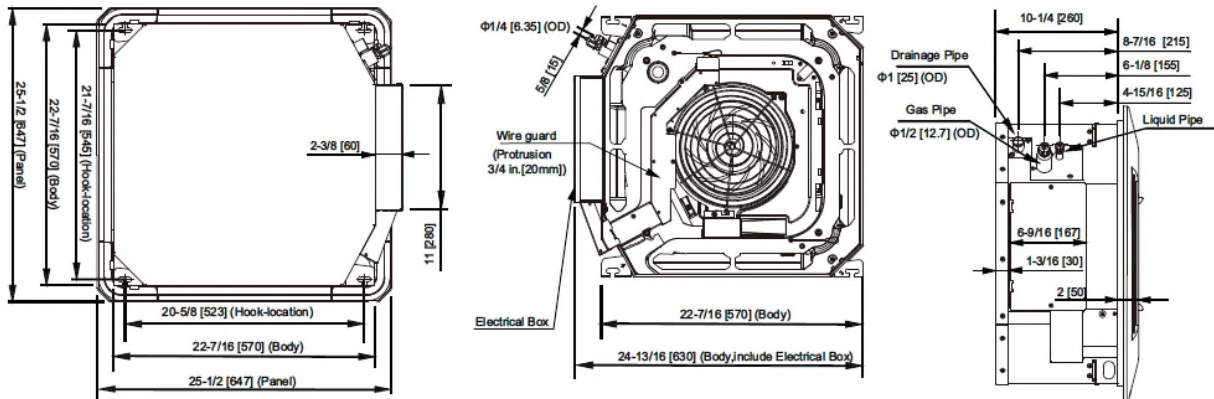

| 40VMC UNIT<br>SIZE | DIMENSION (in.) |
|--------------------|-----------------|
|                    | L               |
| 012                | 1-3/16 ~ 1-1/2  |

NOTE: All dimensions shown in inches.

