

4-Way Cassette Heat Pump Ductless System

Indoor Model: 45MBCAQ12XA3




Job Data:
Tag #:
Date:

Location:
Carrier#:



- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
 - Outside Air Intake
 - Four fan speeds
 - Sleep Mode
 - Built-in condensate lift pump
 - Follow Me (senses temperature at handheld remote)
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
 - Note: Ceiling Grille is Required and Sold Separately
 - Factory Pre- installed Leak Detection System
 - Pipe Connection Size - Liquid: 1/4in (6.35mm)
 - Pipe Connection Size - Suction: 3/8in (9.52mm)
- RESIDENTIAL APPLICATION LIMITED WARRANTY***
- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

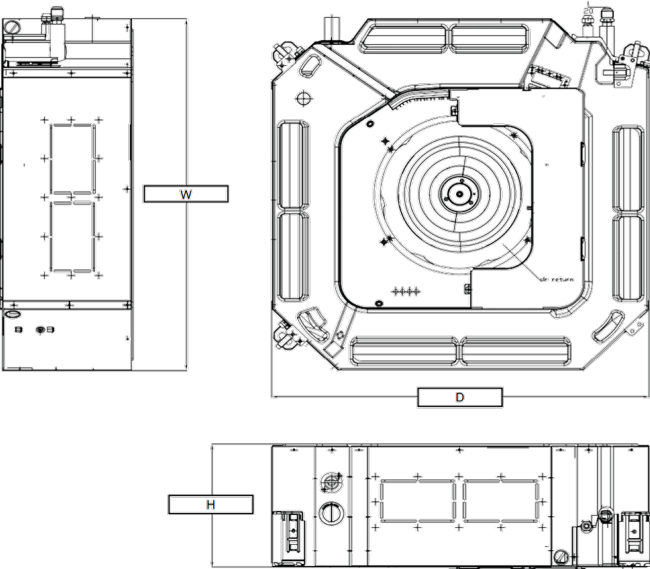

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
12K	mm	570	570	245
	inch	22.44	22.44	9.65



45MBCAQ12XA3			
System	Indoor Model #	45MBCAQ12XA3	
	Indoor Size	12000	
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
Operating Range	MCA	A.	3
	Cooling Indoor DB Min - Max	*F(*C)	60~90 (16 ~ 32)
Indoor Coil	Heating Indoor DB Min - Max	*F(*C)	32~86 (0 ~ 30)
	Face Area	Sq. Ft.	2.95
Indoor Unit	No. Rows		2
	Fins per inch		20
Dimensions	Circuits		4
	Number of Fan Speeds		700/600/400
Indoor Unit	Airflow (highest to lowest)	CFM	364.92/306.06/194.23
	Sound Pressure (highest to lowest)	dB(A)	43.5/40.5/27.5/26.0
Dimensions	Moisture Removal	L/h	1.45
	Air Throw Data	ft(m)	9.84(3)
Dimensions	Body Height	in (mm)	9.65(245)
	Body Width	in (mm)	22.44(570)
Dimensions	Body Depth	in (mm)	22.44(570)
	Body Net Weight	lbs (kg)	35.27(16)
Dimensions	Panel Height	in (mm)	1.969(50)
	Panel Width	in (mm)	24.406(620)
Dimensions	Panel Depth	in (mm)	24.406(620)
	Shipping Height	in (mm)	11.61(295)
Dimensions	Shipping Width	in (mm)	28.15(715)
	Shipping Depth	in (mm)	25.20(640)
Controls	Shipping Net Weight	lbs (kg)	41.89(19)
	Standard	Wireless Remote Controller (*F/*C Convertible)	
Required	Cassette Panel	45MBCQ01XXX3	
	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
Optional	Wired Remote Control with Timer Function	KSACN1201AAA	
	Wi-Fi™ Kit High Wall	KSAIF0701AAA	
Controls	24V Mini Interface	KSAIC0601230	



R-454B



R-454B