

OASIS

***Tough outside, cool inside.
The only truck refrigeration unit specially
designed to meet the challenges
raised by high ambient
temperatures.***



OASIS

High capacity truck refrigeration range Oasis has been designed to meet the challenges raised by high ambient temperatures up to +50°C.



HIGH REFRIGERATION CAPACITY

In high ambient climates, sustaining the cold chain is more important than anywhere else. The Oasis range featuring R404A and R134A refrigerants delivers unmatched capacity and constant airflow, especially thanks to its electrical fans. Truck operators can depend on reliable protection of perishables.

HIGH AMBIENT DESIGNED

Durability: combining aerodynamic styling and reliability, the OASIS range has been designed with rugged and durable material to resist harsh conditions. All components have gone through UV and chemicals resistance tests to operate in extreme climates.

Easy start: the new alternator design enables the engine to reach its nominal speed with fewer loads by delaying the power output. This feature helps to extend the lifecycle of key internal components such as the engine, clutch and belts.

AVAILABLE IN MULTI-TEMPERATURE

The Oasis range offers flexibility for multi-product deliveries with 7 standard configurations available thanks to the ultra-slim evaporator range.

MAINTENANCE FRIENDLY OPERATION

Accessibility and safety are enhanced on the OASIS range: handling bars, lateral door screw locking system and main shutoff switch. Service inspections and routine maintenance are operated quicker and safer.

MONO-TEMPERATURE CONFIGURATIONS


	REFRIGERATION CAPACITY (WATTS)*		HEATING CAPACITY -18°C/18°C (W)		AIRFLOW (m³/h)	WEIGHT INCL. EVAPORATOR (kg)
	ROAD		STANDBY			
	0°C/30°C	-20°C/30°C	0°C/30°C	-20°C/30°C		
OASIS 350	10300	6400	9600	5800	2770	596
OASIS 250	5800	3600	4440	2840	2250	429
OASIS 250 Fresh	5030	n/a	1430	n/a	2250	429
OASIS 150	5000	2600	4070	2000	2250	391
OASIS 150 Fresh	3310	n/a	2950	n/a	1590	340

MULTI-TEMPERATURE CONFIGURATIONS


	CAPACITY (Watts)* -20°C	AIRFLOW (m³/h)	WEIGHT W/O EVAPORATOR (kg)	BOXES CONFIGURATION
OASIS 350 MT°	6200	Up to 4500**	566	3
OASIS 250 MT°	3600	1500	411	4

* Ambient temperature at +30°C (per A.T.P. procedure) ** According to evaporator type

EXAMPLE OF CONFIGURATIONS OASIS 250 MT



EXAMPLE OF CONFIGURATIONS OASIS 350 MT

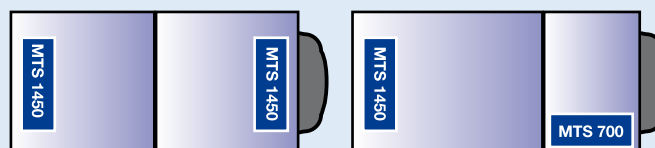

The Oasis range benefits from the EasyCOLD microprocessor.

ACCESSORIES

- Battery
- Battery box
- Fuel tank 90 or 200 L
- Plunger tube for vehicle fuel tank
- Automatic phase reverser
- Datacold 250 or 500
- Oil drain extension
- Control panel & cable extension
- Waterproof box for cab command
- Door switch



600 Carrier service stations in Europe, Russia, Middle East and Africa

Carrier Transicold Europe S.C.S.
Le Cristalia
3 rue Joseph Monier
F-92500 Rueil-Malmaison
Phone : +33 (0)1 41 42 28 00
Fax : + 33 (0)1 41 42 28 28
www.carriertransicold.eu